

# KBT700XE

Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709286620
Hood width	70 cm
Aesthetics	Universal
Colour	Stainless steel
Finishing	Brushed
Logo	Silk screen



## Controls

Control setting	Electronic buttons
-----------------	--------------------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	

## Technical Features



No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light power	1,3 W	Vent outlet	150 mm
Light colour temperature scale (K)	3000 K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	610 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	500 mm
Motor power	230 W	Non return valve	Yes
No. of filters	2		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	256	48
Speed 2	347	55
Speed 3	463	63
Intensive speed	688	72

## Accessories Included

Tube reduction Yes

## Performance / Energy Label



**Annual Efficiency Consumption (AEChood)** 54 kWh/year  
**Energy efficiency class (EEC)** A  
**Fluid Dynamic Efficiency (FDE)** 29,2  
**Fluid Dynamic Efficiency class (FDEC)** A  
**Lighting Efficiency (LE)** 65,0 lux/W  
**Lighting Efficiency Class (LEC)** A  
**Grease Filtering Efficiency (GFE)** 79,8 %  
**Grease Filtering Efficiency Class (GFEC)** C  
**Air flow at minumum speed (Qmin)** 256 m<sup>3</sup>/h  
**Maximum extraction rate** 463 m<sup>3</sup>/h  
**Intensive extraction rate** 688 m<sup>3</sup>/h


**Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)** 47 dBA  
**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)** 63 dBA  
**Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)** 71 dBA  
**Time increase factor (F)** 0,9  
**Energy Efficiency Index per first cavity** 51,9  
**Measured air flow rate at best efficiency point (Qbep)** 386 m<sup>3</sup>/h  
**Measured air pressure at best efficiency point (Qbep)** 428 Pa  
**Measured electric power input at best efficiency point (Wbep)** 157 W  
**Normal Power of the light system (WI)** 3 W  
**Average illumination of the light on the cooking surface (Emiddle)** 157 lux  
**Sound power level at highest setting (Lwa)** 63 dBA

## Electrical Connection

Nominal power 230 W

---

Voltage	220-240 V	Power supply cable length	1500 mm
Frequency (Hz)	50-60 Hz	Plug	No

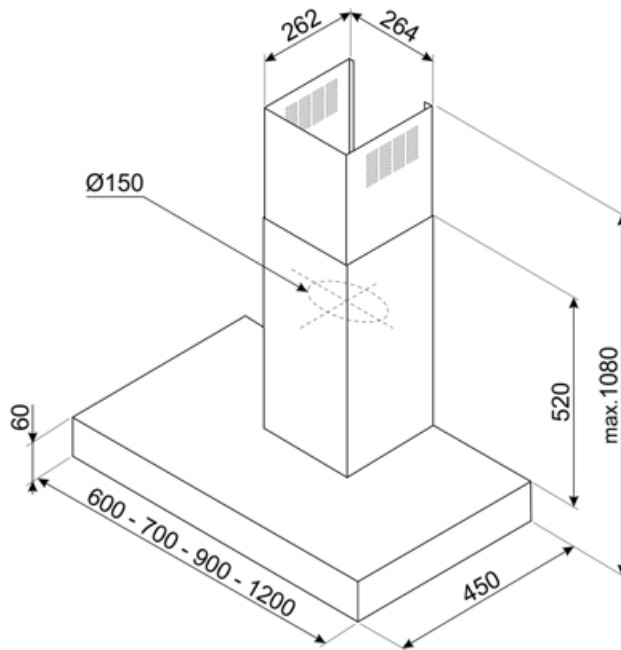

---

## Compatible Accessories

---



### KITCEKBT

Chimney extension, dimensions 261,5 \* 260 \* 830 mm suitable for T-shape hood KBT\* & KBCT\*, max height 1380 mm Stainless Steel



### KITFCKBT

1 pcs of activated carbon filter for hood models KBT\* / KBCT\*










### KITFCKBTR

1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

---

## Symbols glossary

---

- |  |   |   |   |
|--|---|---|---|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.       |
|  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.                        |  | A: Product drying performance, measured from A+++ to D / G depending on the product family                    |
|  | Warning light(s): to advise when filters need changing.   |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |
|  | Intensive/turbo setting: when extra fast extraction is required.  |   |   |