

# KBT700XE

Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709286620
Hood width	70 cm






## Aesthetics

Aesthetic	Universale	Finishing	Satin
Colour	Stainless steel	Logo	Silk screen




## Controls

Control setting	Electronic buttons
-----------------	--------------------

## Programme / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	

## Technical Features

				
No. of lights	2	Anti-grease filters	Aluminium	
Light type	LED	Filter replacement indicator	Yes	
Light Power	1.3 W	Vent outlet	150 mm	
Light color temperature scale (°K)	3000 °K	Minimum distance from GAS hob	650 mm	

Free outlet maximum capacity	610 m³/h	Minimum distance from ELECTRIC hob	500 mm
Motor power	230 W	Non return valve	Yes
No. of filters	2		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	256	48
Speed 2	347	55
Speed 3	463	63
Intensive speed	688	72

## Accessories Included

Tube reduction	Yes
----------------	-----


## Performance / Energy Label

**A**

Annual Efficiency Consumption (AEHood)	54 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	63 dB(A)
Energy efficiency class (EEC)	A	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	71 dB(A)
Fluid Dynamic Efficiency (FDE)	29.2	Power consumption in stand-by mode (Ps)	0.24 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.9
Lighting Efficiency (LE)	65.0 lux/W	Energy Efficiency Index	51.9
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	386 m³/h
Grease Filtering Efficiency (GFE)	79.8 %	Measured air pressure at best efficiency point (Pbep)	428 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	157 W
Air flow at minumum speed (Qmin)	256 m³/h	Nominal Power consumption of the light system (WL)	3 W
Air flow at maximum speed (Qmax)	463 m³/h	Average illumination of the light on the cooking surface (Emiddle)	157 lux
Air flow at boost speed (Qboost)	688 m³/h	Sound power level at highest setting (Lwa)	63 dB(A)
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	47 dB(A)		

## Electrical Connection


Electrical connection rating	230 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1500 mm

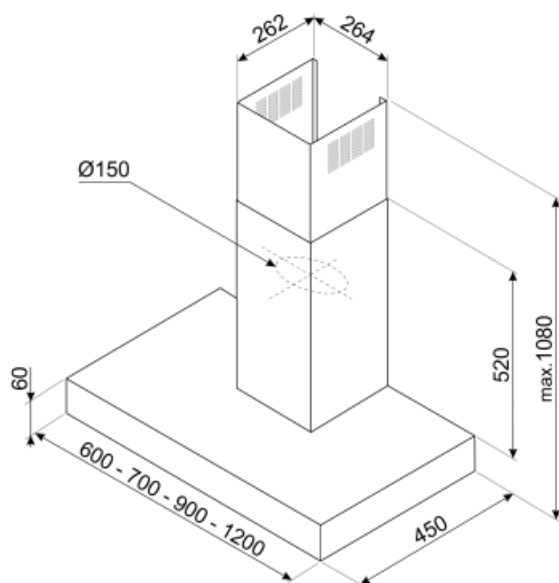

---


## Not included accessories

---



### KITFCKBT

1 pcs di filtro a carboni attivi per i modelli di cappe KBT\* / KBCT\*



### KITFCKBTR

1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models.  
\* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm










### KITCEKBT

Chimney extension, dimensions 261,5 \* 260 \* 830 mm suitable for T-shape hood KBT\* & KBCT\*, max hight 1380 mm Stainless Steel

---

## Symbols glossary (TT)

---

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.		A: Product drying performance, measured from A+++ to D / G depending on the product family
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Intensive/turbo setting: when extra fast extraction is required.		