

KBT700XE



Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709286620
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Silk screen





Controls

Control setting	Electronic buttons
-----------------	--------------------

Programs / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	

Technical Features

				
No. of lights	2	Anti-grease filters	Aluminium	
Light type	LED	Filter replacement indicator	Yes	
Light Power	1.3 W	Vent outlet	150 mm	
Light color temperature scale (°K)	3000 °K	Minimum distance from GAS hob	650 mm	
Free outlet maximum capacity	610 m³/h	Minimum distance from ELECTRIC hob	500 mm	
Motor power	230 W	Non return valve	Yes	
No. of filters	2			

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	256	48
Speed 2	347	55
Speed 3	463	63
Intensive speed	688	72

Accessories Included

Tube reduction Yes

Performance / Energy Label



Annual Efficiency Consumption (AEChood) 54 kWh/a

Energy efficiency class (EEC) A

Fluid Dynamic Efficiency (FDE) 29.2

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 65.0 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 79.8 %

Grease Filtering Efficiency Class (GFEC) C

Air flow at minumum speed (Qmin) 256 m³/h

Air flow at maximum speed (Qmax) 463 m³/h

Air flow at boost speed (Qboost) 688 m³/h

Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin) 47 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 63 dBA

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 71 dBA

Power consumption in stand-by mode (Ps) 0.24 W

Time increase factor (F) 0.9

Energy Efficiency Index 51.9

Measured air flow rate at best efficiency point (Qbep) 386 m³/h

Measured air pressure at best efficiency point (Pbep) 428 Pa

Measured electric power input at best efficiency point (Wbep) 157 W

Nominal Power consumption of the light system (WL) 3 W

Average illumination of the light on the cooking surface (Emiddle) 157 lux

Sound power level at highest setting (Lwa) 63 dBA


Electrical Connection

Plug Not present

Frequency (Hz) 50-60 Hz

Electrical connection rating 230 W
Voltage 220-240 V

Power supply cable length 1500 mm

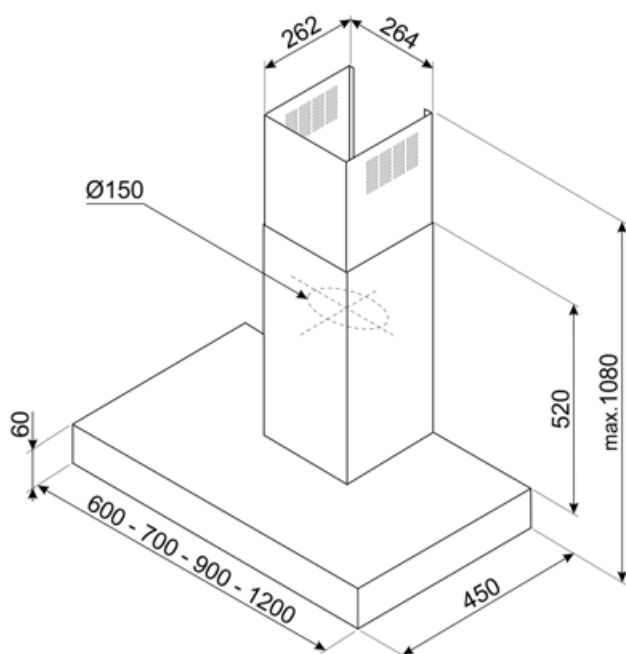

Compatible Accessories



KITCEKBT

Chimney extension, dimensions 261,5 * 260 * 830 mm suitable for T-shape hood KBT* & KBCT*, max height 1380 mm Stainless Steel



KITFCKBT

1 pcs di filtro a carboni attivi per i modelli di cappe KBT* / KBCT*



KITFCKBTR

1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.