

# KBT700XE




Product family	Hood
Tipo de Exaustor	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	No
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709286620
Aesthetic	Universal
Colour	Stainless steel
Acabamento	Satin
Logotipo	Logotipo serigrafado



## Controls

Control setting	Electronic buttons
-----------------	--------------------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Other functions	No
Time-setting options	
Other options	No
Ventilação automática	No

## Technical Features



Hood without motor	No	No. of filters	2
Remote motor	No	Anti-grease filters	Aluminium
No. of lights	2	Charcoal filters included	No
Light type	LED	Filter replacement indicator	Yes
Light Power	1.3 W	Vent outlet	150 mm
Dimmer mode	No	Minimum distance from GAS hob	650 mm
Escala de temperatura de cor clara (°K)	3000 °K		

Free outlet maximum capacity	610 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	500 mm
Motor power	230 W	Non return valve	Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	256	48
Speed 2	347	55
Speed 3	463	63
Intensive speed	688	72

## Accessories Included

Remote control	No	Tube reduction	Yes
----------------	----	----------------	-----

## Performance / Energy Label




Consumo anual de energía (CAE exaustor)	54 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	63 dBA
Energy efficiency class (EEC)	A	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	71 dBA
Fluid Dynamic Efficiency (FDE)	29,2	Power consumption in stand-by mode (Ps)	0,24 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,9
Lighting Efficiency (LE)	65,0 lux/W	Energy Efficiency Index	51,9
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	386 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	79,8 %	Measured air pressure at best efficiency point (Pbep)	428 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	157 W
Air flow at minimum speed (Qmin)	256 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	3 W
Air flow at maximum speed (Qmax)	463 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	157 lux
Air flow at boost speed (Qboost)	688 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	63 dBA
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	47 dBA		

## Electrical Connection

Plug	No	Frequency (Hz)	50-60 Hz
Electrical connection rating	230 W	Comprimento do cabo de alimentação	1500 mm
Voltage	220-240 V		

## Optional accessories

Charcoal filter	No	Non return valve	No
Remote control	No	Kit with aesthetic components	No
Chimney extension	No	Diffuser kit	No
Vent outlet	No		

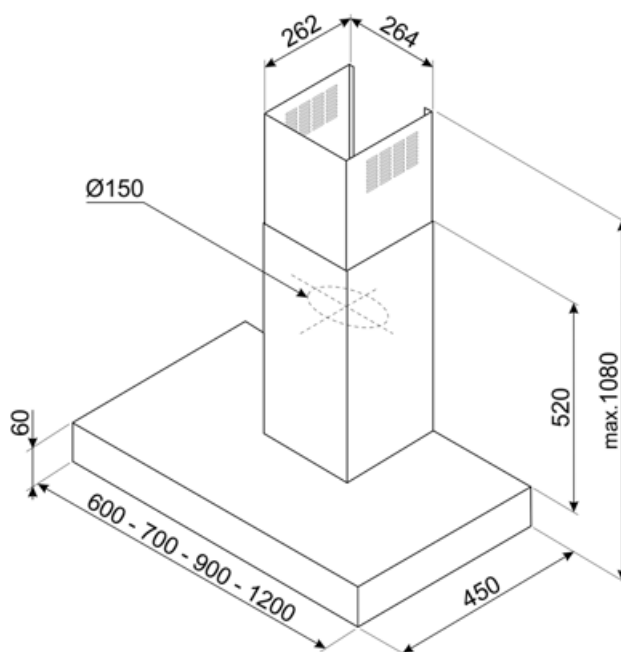

---


## Compatible Accessories

---




### KITCEKBT

Extensão da chaminé, dimensões 261,5 \* 260 \* 830 mm adequado para exaustor em forma de T KBT\* e KBCT\*, altura máxima 1380 mm de aço inoxidável



### KITFCKBT








1 peça de filtro de carvões ativos para os modelos de exaustores KBT\*/KBCT\*



### KITFCKBTR

1 pcs de filtro de carvão Regenerável\* adequado para todos os modelos KBT\*/KBCT. \* Pode ser lavado na máquina lava-louça até 12 vezes e seco no forno a um máximo de 90° durante 60 min. dimensão 237,5(A)x245x10 mm

## Symbols glossary

-  24h: Quando selecionada, esta função refresca o ar durante cerca de 10 minutos a cada hora durante um período de 24 horas, a uma velocidade mínima e a um nível de ruído imperceptível.
-  Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.
-  Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.
-  Configuração intensiva/turbo: quando a extração extra rápida é necessária.
-  Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.
-  R: Desempenho de secagem do produto, medido de A++ a D/G, dependendo da família de produtos
-  Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.