

KBT900NE

Product family	Hood
Tipo de Exaustor	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	No
Material	Painted material
Type of steel	Brushed
EAN code	8017709299811
Aesthetic	Universal
Colour	Preto opaco
Acabamento	Opaco
Logotipo	Logotipo serigrafado



Controls

Control setting	Electronic buttons
-----------------	--------------------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Other functions	No
Time-setting options	
Other options	No
Ventilação automática	No

Technical Features



Hood without motor	No	No. of filters	3
Remote motor	No	Anti-grease filters	Aluminium
No. of lights	2	Charcoal filters included	No
Light type	LED	Filter replacement indicator	Yes
Light Power	1.3 W	Vent outlet	150 mm
Dimmer mode	No	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	730 m³/h		
Motor power	230 W		

Minimum distance from ELECTRIC hob 500 mm
Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	265	47
Speed 2	360	55
Speed 3	480	62
Intensive speed	713	72

Accessories Included

Remote control No Tube reduction Yes

Performance / Energy Label



Consumo anual de energia (CAE exaustor) 54 kWh/a
Energy efficiency class (EEC) A
Fluid Dynamic Efficiency (FDE) 31,2
Fluid Dynamic Efficiency class (FDEC) A
Lighting Efficiency (LE) 60,0 lux/W
Lighting Efficiency Class (LEC) A
Grease Filtering Efficiency (GFE) 76,5 %
Grease Filtering Efficiency Class (GFEC) C
Air flow at minumum speed (Qmin) 265 m³/h
Air flow at maximum speed (Qmax) 480 m³/h
Air flow at boost speed (Qboost) 713 m³/h


Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 46 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 62 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 71 dBA
Time increase factor (F) 0,9
Energy Efficiency Index 52,0
Measured air flow rate at best efficiency point (Qbep) 395 m³/h
Measured air pressure at best efficiency point (Pbep) 451 Pa
Measured electric power input at best efficiency point (Wbep) 159 W
Nominal Power consumption of the light system (WL) 3 W
Average illumination of the light on the cooking surface (Emiddle) 156 lux
Sound power level at highest setting (Lwa) 62 dBA

Electrical Connection

Plug	No	Frequency (Hz)	50-60 Hz
Electrical connection rating	230 W	Comprimento do cabo de alimentação	1500 mm
Voltage	220-240 V		

Optional accessories


Charcoal filter	No	Non return valve	No
Remote control	No	Kit with aesthetic components	No
Chimney extension	No	Diffuser kit	No
Vent outlet	No		

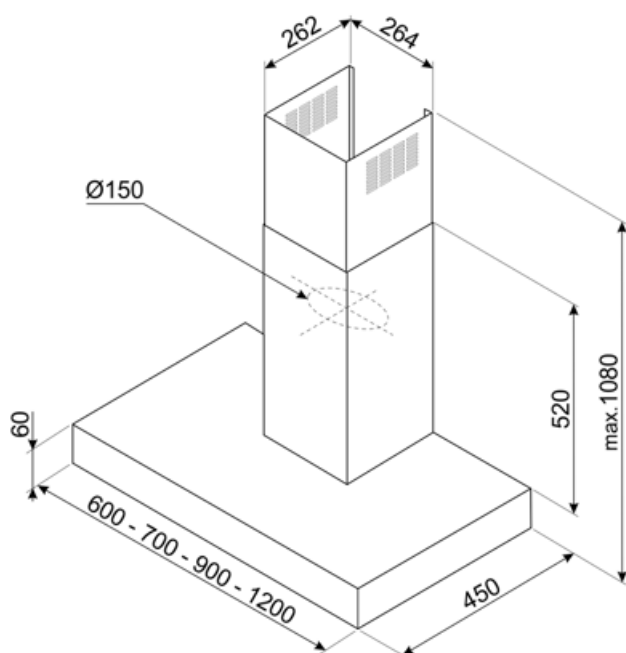

Compatible Accessories




KITCEKBTMB



KITFCKBT

1 peça de filtro de carvões ativos para os modelos de exaustores KBT*/KBCT*



KITFCKBTR

1 pcs de filtro de carvão Regenerável* adequado para todos os modelos KBT/KBCT. * Pode ser lavado na máquina lava-louça até 12 vezes e seco no forno a um máximo de 90° durante 60 min. dimensão 237,5(A)x245x10 mm

Symbols glossary

	24h: Quando selezionada, esta função refresca o ar durante cerca de 10 minutos a cada hora durante um período de 24 horas, a uma velocidade mínima e a um nível de ruído imperceptível.		Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.
	R: Desempenho de secagem do produto, medido de A++ a D/G, dependendo da família de produtos		Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.
	Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.		Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.
	Configuração intensiva/turbo: quando a extração extra rápida é necessária.		