

# KBT900VE

**Product family** Hood

**Hood Type** Chimney Cooker Hoods

Design

Extraction Ducted out or re-circulation possible

**Electronic control** Yes

Material Stainless Steel + Glass

Type of steel Brushed

EAN code 8017709289706

Hood width 90 cm **Aesthetics** Universal Colour Stainless steel Brushed **Finishing** Logo Silk screen



#### **Controls**

Control setting **Electronic buttons** 

## **Program / Functions**

No. of speeds Intensive speed

24h air filter function

Time-setting options







#### **Technical Features**







No. of lights 2 Light type LED Light power 1,3 W Light colour 3000 K

temperature scale (K)

Free outlet maximum 730 m<sup>3</sup>/h

capacity

230 W Motor power No. of filters 1

Aluminium Anti-grease filters Filter replacement Yes

indicator

Vent outlet 150 mm Minimum distance from 650 mm

**GAS** hob

Minimum distance from

**ELECTRIC hob** 

Non return valve

500 mm

Yes

**SMEG SPA** 25/11/2025



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	243	48
Speed 2	332	55
Speed 3	451	62
Intensive speed	677	71

#### Accessories Included

Tube reduction Yes

### Performance / Energy Label

B f **Annual Efficiency** 60 kWh/year Consumption (AEChood) Energy efficiency class ( B EEC) Fluid Dynamic Efficiency 29,1 (FDE) Fluid Dynamic Efficiency A class (FDEC) Lighting Efficiency (LE) 71,0 lux/W Lighting Efficiency Class A (LEC) **Grease Filtering** 81.1 % Efficiency (GFE) **Grease Filtering** C Efficiency Class (GFEC) Air flow at minumum

speed (Qmin)

rate

Maximum extraction

243 m<sup>3</sup>/h 451 m<sup>3</sup>/h Intensive extraction rate 677 m<sup>3</sup>/h Airbourne acouistical A- 47 dBA weighted sound Power Emission at minimum speed (SPEmin) Airborne acoustical A-62 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Airbourne acoustical A-70 dBA weighted sound power emission at boost speed (SPEboost) Time increase factor (F) **Energy Efficiency Index** 59.5 per first cavity Measured air flow rate 383 m<sup>3</sup>/h at best efficiency point (Qbep) Measured air pressure 433 Pa at best efficiency point (Qbep) Measured electric 158 W power input at best efficiency point (Wbep) Normal Power of the 3 W light system (WI) Average illumination of 186 lux the light on the cooking surface (Emiddle)

Sound power level at

highest setting (Lwa)


62 dBA

#### **Electrical Connection**

50-60 Hz Nominal power 233 W Frequency (Hz)

**SMEG SPA** 25/11/2025



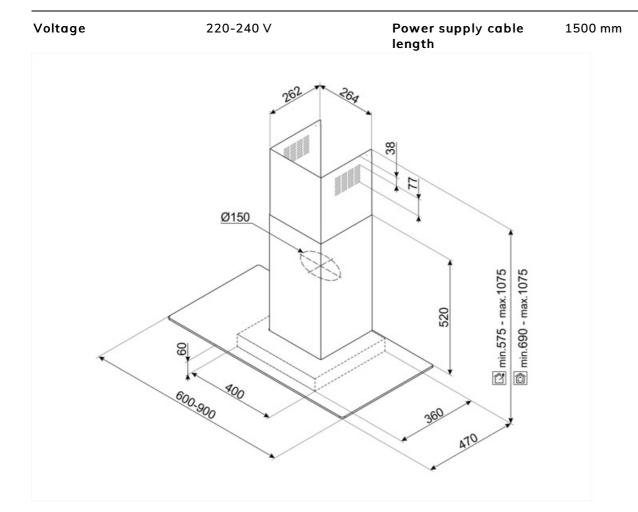

SMEG SPA 25/11/2025



## **Compatible Accessories**



#### **KITCEKBT**

Chimney extension, dimensions 261,5 \* 260 \* 830 mm suitable for T-shape hood KBT\* & KBCT\*, max hight 1380 mm Stainless Steel



#### **KITFCKBT**

1 pcs of activated carbon filter for hood models KBT\* / KBCT\*

#### **KITFCKBTR**



1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

SMEG SPA 25/11/2025



## Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.





Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.

SMEG SPA 25/11/2025