

# KBT9L4VN

<b>Product family</b>	Hood
<b>Hood Type</b>	Decorative wall hood
<b>Design</b>	T flat
<b>Extraction</b>	Extraction
<b>Electronic control</b>	Yes
<b>Material</b>	Stainless steel
<b>Type of steel</b>	Brushed
<b>EAN code</b>	8017709305734
<b>Hood width</b>	90 cm
<b>Aesthetic</b>	Universale
<b>Colour</b>	Stainless Steel and Glass
<b>Finishing</b>	Satin
<b>Glass Type</b>	Black
<b>Serigraphy colour</b>	Black
<b>Logo</b>	Silk screen







## Controls



<b>Control setting</b>	Touch control back-lighted	<b>Display</b>	Yes
<b>Led color</b>	White		

## Program / Functions

<b>No. of speeds</b>	3
<b>Intensive speed</b>	
<b>24h air filter function</b>	
<b>Time-setting options</b>	
<b>Auto-vent 2.0</b>	

## Technical Features



<b>No. of lights</b>	1	<b>No. of filters</b>	3
<b>Light type</b>	LED	<b>Anti-grease filters</b>	Aluminium
<b>Light Power</b>	7.3 W	<b>Filter replacement indicator</b>	Yes
<b>Dimmer mode</b>	Yes	<b>Vent outlet</b>	150 mm
<b>Light color temperature range</b>	3000 - 5700 K	<b>Minimum distance from GAS hob</b>	650 mm
<b>Free outlet maximum capacity</b>	730 m <sup>3</sup> /h		

Motor power	230 W	Minimum distance from ELECTRIC hob	500 mm
		Non return valve	Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	252	48
Speed 2	341	55
Speed 3	453	62
Intensive speed	705	72

## Accessories Included

Tube reduction	Yes
----------------	-----


## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	58 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	46 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	62 dBA
Fluid Dynamic Efficiency (FDE)	30.5	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	71 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.9
Lighting Efficiency (LE)	28.2 lux/W	Energy Efficiency Index	54.0
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	385 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	73.7 %	Measured air pressure at best efficiency point (Pbep)	461 Pa
Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	161 W
Air flow at mininum speed (Qmin)	252 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	7 W
Air flow at maximum speed (Qmax)	453 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	209 lux
Air flow at boost speed (Qboost)	705 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	62 dBA

## Electrical Connection

Electrical connection rating	238 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	No
Frequency (Hz)	50-60 Hz		

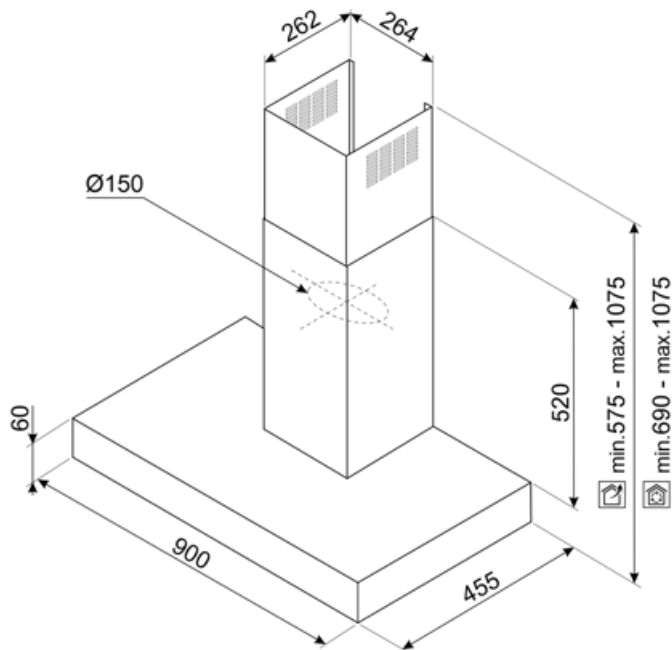

---

## Compatible Accessories

---



### KITCEKBT

Chimney extension, dimensions 261,5 \* 260 \* 830 mm suitable for T-shape hood KBT\* & KBCT\*, max height 1380 mm Stainless Steel



### KITFCKBT












1 pcs di filtro a carboni attivi per i modelli di cappe KBT\* / KBCT\*



### KITFCKBTR

1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

## Symbols glossary

-  24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.
-  A: Product drying performance, measured from A+++ to D / G depending on the product family
-  LED display: to show programmes, functions and options selected and the time to the end of the cycle.
-  Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
-  Connection between hob and hood
-  Tunable white from warm to cold.
-  Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
-  Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
-  Warning light(s): to advise when filters need changing.
-  Intensive/turbo setting: when extra fast extraction is required.
-  Dimmering Lights