

KBT9L4VN

| | |
|---------------------------|---------------------------------------|
| Product family | Hood |
| Hood Type | Chimney Cooker Hoods |
| Design | T flat |
| Extraction | Ducted out or re-circulation possible |
| Electronic control | Yes |
| Material | Stainless steel |
| Type of steel | Brushed |
| EAN code | 8017709305734 |
| Hood width | 90 cm |
| Aesthetics | Universal |
| Colour | Stainless Steel and Glass |
| Finishing | Brushed |
| Glass Type | Black |
| Serigraphy colour | Black |
| Logo | Silk screen |







Controls



| | | | |
|------------------------|----------------------------|----------------|-----|
| Control setting | Touch control back-lighted | Display | Yes |
| Led colour | White | | |

Program / Functions

| | |
|--------------------------------|---|
| No. of speeds | 3 |
| Intensive speed |  |
| 24h air filter function |  |
| Time-setting options |  |
| Auto-Vent 2.0 |  |

Technical Features



| | | | |
|---------------------------------------|-----------------------|--------------------------------------|-----------|
| No. of lights | 1 | No. of filters | 3 |
| Light type | LED | Anti-grease filters | Aluminium |
| Light power | 7,3 W | Filter replacement indicator | Yes |
| Dimmer mode | Yes | Vent outlet | 150 mm |
| Light colour temperature range | 3000 - 5700 K | Minimum distance from GAS hob | 650 mm |
| Free outlet maximum capacity | 730 m ³ /h | | |

| | | | |
|-------------|-------|------------------------------------|--------|
| Motor power | 230 W | Minimum distance from ELECTRIC hob | 500 mm |
| | | Non return valve | Yes |

| | Extraction rate IEC 61591 [m ³ /h] | Noise level IEC 60704-2-13 [dBA] |
|-----------------|---|----------------------------------|
| Speed 1 | 252 | 48 |
| Speed 2 | 341 | 55 |
| Speed 3 | 453 | 62 |
| Intensive speed | 705 | 72 |

Accessories Included

| | |
|----------------|-----|
| Tube reduction | Yes |
|----------------|-----|


Performance / Energy Label



| | | | |
|--|-----------------------|--|-----------------------|
| Annual Efficiency Consumption (AEChood) | 58 kWh/year | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 46 dBA |
| Energy efficiency class (EEC) | A | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) | 62 dBA |
| Fluid Dynamic Efficiency (FDE) | 30,5 | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 71 dBA |
| Fluid Dynamic Efficiency class (FDEC) | A | Time increase factor (F) | 0,9 |
| Lighting Efficiency (LE) | 28,2 lux/W | Energy Efficiency Index per first cavity | 54,0 |
| Lighting Efficiency Class (LEC) | A | Measured air flow rate at best efficiency point (Qbep) | 385 m ³ /h |
| Grease Filtering Efficiency (GFE) | 73,7 % | Measured air pressure at best efficiency point (Qbep) | 461 Pa |
| Grease Filtering Efficiency Class (GFEC) | D | Measured electric power input at best efficiency point (Wbep) | 161 W |
| Air flow at minimum speed (Qmin) | 252 m ³ /h | Normal Power of the light system (WI) | 7 W |
| Maximum extraction rate | 453 m ³ /h | Average illumination of the light on the cooking surface (Emiddle) | 209 lux |
| Intensive extraction rate | 705 m ³ /h | Sound power level at highest setting (Lwa) | 62 dBA |

Electrical Connection

| | | | |
|----------------|-----------|---------------------------|---------|
| Nominal power | 238 W | Power supply cable length | 1500 mm |
| Voltage | 220-240 V | Plug | No |
| Frequency (Hz) | 50-60 Hz | | |

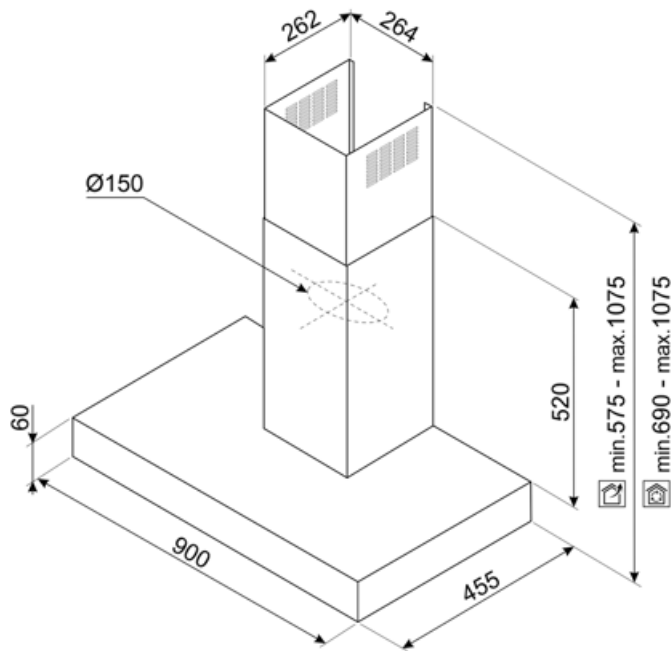

Compatible Accessories



KITCEKBT

Chimney extension, dimensions 261,5 * 260 * 830 mm suitable for T-shape hood KBT* & KBCT*, max height 1380 mm Stainless Steel



KITFCKBT












1 pcs of activated carbon filter for hood models KBT* / KBCT*



KITFCKBTR

1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

Symbols glossary

-  24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.
-  A: Product drying performance, measured from A+++ to D / G depending on the product family
-  LED display: to show programmes, functions and options selected and the time to the end of the cycle.
-  Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
-  Connection between hob and hood
-  Tunable white from warm to cold.
-  Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
-  Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
-  Warning light(s): to advise when filters need changing.
-  Intensive/turbo setting: when extra fast extraction is required.
-  Dimmering Lights