KBT9L4VN

Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709305734
Hood width	90 cm
Aesthetics	Universal
Colour	Stainless Steel and Glass
Finishing	Brushed
Glass Type	Black
Serigraphy colour	Black
Logo	Silk screen



Controls

Control setting	Touch control back-lighted White	**Display**	Yes
Led colour	White		

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	

Technical Features

No. of lights	1	**No. of filters**	3
Light type	LED	**Anti-grease filters**	Aluminium
Light power	7.3 W	**Filter replacement indicator**	Yes
Dimmer mode	Yes	**Vent outlet**	150 mm
Light colour temperature range	3000 - 5700 K	**Minimum distance from GAS hob**	650 mm
Free outlet maximum capacity	730 m³/h		

Motor power	230 W	**Minimum distance from ELECTRIC hob**	500 mm
		Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	252	48
Speed 2	341	55
Speed 3	453	62
Intensive speed	705	72

Accessories Included


Tube reduction	Yes

Performance / Energy Label

Annual Efficiency Consumption (AEChood)	58 kWh/year	**Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)**	46 dBA
Energy efficiency class (EEC)	A	**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)**	62 dBA
Fluid Dynamic Efficiency (FDE)	30.5	**Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)**	71 dBA
Fluid Dynamic Efficiency class (FDEC)	A	**Time increase factor (F)**	0.9
Lighting Efficiency (LE)	28.2 lux/W	**Energy Efficiency Index per first cavity**	54.0
Lighting Efficiency Class (LEC)	A	**Measured air flow rate at best efficiency point (Qbep)**	385 m³/h
Grease Filtering Efficiency (GFE)	73.7 %	**Measured air pressure at best efficiency point (Qbep)**	461 Pa
Grease Filtering Efficiency Class (GFEC)	D	**Measured electric power input at best efficiency point (Wbep)**	161 W
Air flow at minumum speed (Qmin)	252 m³/h	**Normal Power of the light system (Wl)**	7 W
Maximum extraction rate	453 m³/h	**Average illumination of the light on the cooking surface (Emiddle)**	209 lux
Intensive extraction rate	705 m³/h	**Sound power level at highest setting (Lwa)**	62 dBA

Electrical Connection

Nominal power	238 W	**Power supply cable length**	1500 mm
Voltage	220-240 V	**Plug**	No
Frequency (Hz)	50-60 Hz		

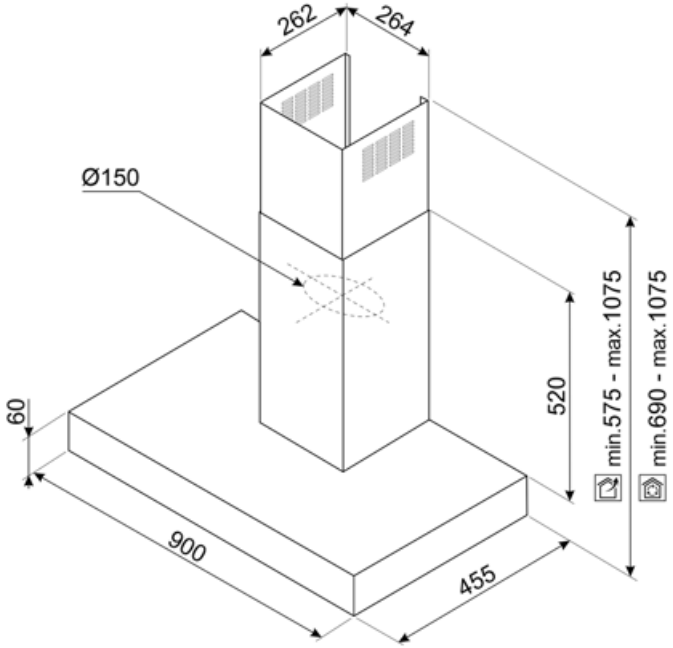


Compatible Accessories




KITCEKBT

Chimney extension, dimensions 261,5 * 260 * 830 mm suitable for T-shape hood KBT* & KBCT*, max hight 1380 mm Stainless Steel



KITFCKBTR

1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm



KITFCKBT

1 pcs of activated carbon filter for hood models KBT* / KBCT*

Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Connection between hob and hood



Dimmering Lights



Tunable white from warm to cold.