

# KBT9L4VN


|                    |                                       |
|--------------------|---------------------------------------|
| Product family     | Hood                                  |
| Hood Type          | Decorative wall hood                  |
| Design             | T flat                                |
| Extraction         | Ducted out or re-circulation possible |
| Electronic control | Yes                                   |
| Material           | Stainless steel                       |
| Type of steel      | Brushed                               |
| EAN code           | 8017709305734                         |
| Hood width         | 90 cm                                 |







## Aesthetics

|            |                           |                   |             |
|------------|---------------------------|-------------------|-------------|
| Aesthetics | Universal                 | Glass Type        | Black       |
| Colour     | Stainless Steel and Glass | Serigraphy colour | Black       |
| Finishing  | Brushed                   | Logo              | Silk screen |

## Controls

|  |                            |         |     |
|--|----------------------------|---------|-----|
|  |                            |         |     |
| Control setting  | Touch control back-lighted | Display | Yes |
| Led colour   | White                      |         |     |

## Programs / Functions

|                         |   |
|-------------------------|---|
| No. of speeds           | 3   |
| Intensive speed         |  |
| 24h air filter function |  |
| Time-setting options    |  |
| Auto-vent 2.0           |  |

## Technical Features



|                                      |                  |   |           |
|--------------------------------------|------------------|---|-----------|
| <b>No. of lights</b>                 | 1                | <b>No. of filters</b>                     | 3         |
| <b>Light type</b>                    | LED              | <b>Anti-grease filters</b>                | Aluminium |
| <b>Light power</b>                   | 7.3 W            | <b>Filter replacement indicator</b>       | Yes       |
| <b>Dimmer mode</b>                   | Yes              | <b>Vent outlet</b>                        | 150 mm    |
| <b>Light color temperature range</b> | 3000° - 5700° °K | <b>Minimum distance from GAS hob</b>      | 650 mm    |
| <b>Free outlet maximum capacity</b>  | 730 m³/h         | <b>Minimum distance from ELECTRIC hob</b> | 500 mm    |
| <b>Motor power</b>                   | 230 W            | <b>Non return valve</b>                   | Yes       |

|                 | <b>Extraction rate IEC 61591 [m³/h]</b> | <b>Noise level IEC 60704-2-13 [dB(A)]</b> |
|-----------------|---|---|
| Speed 1         | 252                                     | 48  |
| Speed 2         | 341                                     | 55  |
| Speed 3         | 453                                     | 62  |
| Intensive speed | 705                                     | 72  |

## Accessories Included

**Tube reduction** Yes

## Performance / Energy Label

|   |             |  |          |
|---|-------------|--|----------|
| <b>Annual Efficiency Consumption (AEC<sub>hood</sub>)</b> | 58 kWh/year | <b>Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE<sub>max</sub>)</b>  | 62 dB(A) |
| <b>Energy efficiency class (EEC)</b>                      | A           | <b>Airbourne acoustical A-weighted sound power emission at boost speed (SPE<sub>boost</sub>)</b> | 71 dB(A) |
| <b>Fluid Dynamic Efficiency (FDE)</b>                     | 30.5        | <b>Power consumption in stand-by mode (P<sub>s</sub>)</b>  | 0.42 W   |
| <b>Fluid Dynamic Efficiency class (FDEC)</b>              | A           | <b>Time increase factor (F)</b>  | 0.9      |
| <b>Lighting Efficiency (LE)</b>                           | 28.2 lux/W  | <b>Energy Efficiency Index per first cavity</b>  | 54.0     |
| <b>Lighting Efficiency Class (LEC)</b>                    | A           | <b>Measured air flow rate at best efficiency point (Q<sub>bep</sub>)</b>                         | 385 m³/h |
| <b>Grease Filtering Efficiency (GFE)</b>                  | 73.7 %      | <b>Measured air pressure at best efficiency point (Q<sub>bep</sub>)</b>                          | 461 Pa   |
| <b>Grease Filtering Efficiency Class (GFEC)</b>           | D           | <b>Measured electric power input at best efficiency point (W<sub>bep</sub>)</b>                  | 161 W    |
| <b>Air flow at mininum speed (Q<sub>min</sub>)</b>        | 252 m³/h    |  |          |
| <b>Maximum extraction rate</b>                            | 453 m³/h    |  |          |
| <b>Intensive extraction rate</b>                          | 705 m³/h    |  |          |

Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin) 46 dB(A)

Normal Power of the light system (WI) 7 W


Average illumination of the light on the cooking surface (Emiddle) 209 lux

Sound power level at highest setting (Lwa) 62 dB(A)

## Electrical Connection


Nominal power 238 W  
Voltage 220-240 V

Frequency (Hz) 50-60 Hz  
Power supply cable length 1500 mm

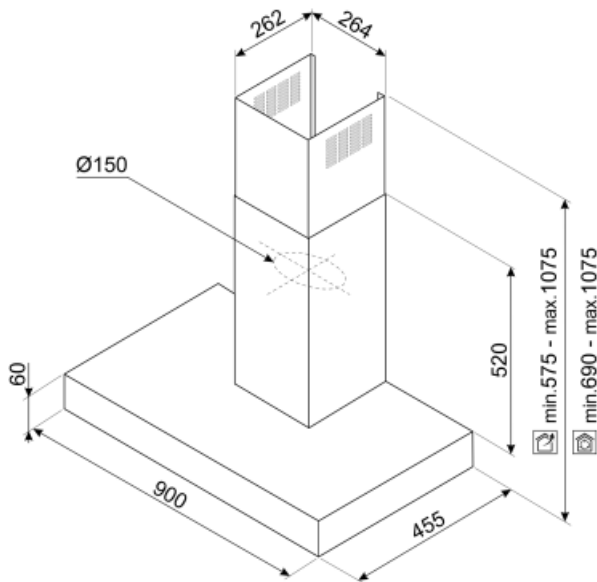


## Not included accessories

---



### KITFCKBT

1 pcs of activated carbon filter for hood models KBT\* / KBCT\*



### KITFCKBTR












1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models.  
\* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm



### KITCEKBT

Chimney extension, dimensions 261,5 \* 260 \* 830 mm suitable for T-shape hood KBT\* & KBCT\*, max hight 1380 mm Stainless Steel

## Symbols glossary

|   |   |   |  |
|---|---|---|--|
|   | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | A: Product drying performance, measured from A+++ to D / G depending on the product family   |
|   | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.   |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|   | LED display: to show programmes, functions and options selected and the time to the end of the cycle.   |  | Warning light(s): to advise when filters need changing.  |
|   | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.   |  | Intensive/turbo setting: when extra fast extraction is required.   |
|   | ...   |  | ...  |
|  | ...   |   |  |