

KBT9L4VN

Product family Hood

Hood Type Chimney Cooker Hoods

Design

Extraction Ducted out or re-circulation possible

Electronic control Yes

Material Stainless steel Type of steel **Brushed**

EAN code 8017709305734

Hood width 90 cm **Aesthetics** Universal

Colour Stainless Steel and Glass

Finishing Brushed Glass Type Black Black Serigraphy colour Logo Silk screen



Controls



Control setting Touch control back-lighted Display Yes

White

Led colour White

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options

Auto-Vent 2.0







Technical Features















Dimmer mode Yes

Light colour 3000 - 5700 K

temperature range

Free outlet maximum capacity

730 m³/h

No. of filters

Anti-grease filters

Filter replacement indicator

Vent outlet

Minimum distance from

GAS hob

3 Aluminium

Yes

150 mm 650 mm

14/12/2025



Motor power 230 W Minimum distance from

500 mm

ELECTRIC hob Non return valve

Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	252	48
Speed 2	341	55
Speed 3	453	62
Intensive speed	705	72

Accessories Included

Tube reduction Yes

Performance / Energy Label

4	Δ	A"
		D

Annual Efficiency 58 kWh/year Consumption (AEChood) Energy efficiency class (A EEC) Fluid Dynamic Efficiency 30.5 (FDE) Fluid Dynamic Efficiency A class (FDEC) Lighting Efficiency (LE) 28.2 lux/W Lighting Efficiency Class A (LEC) **Grease Filtering** 73.7 % Efficiency (GFE) **Grease Filtering** Efficiency Class (GFEC) Air flow at minumum 252 m³/h speed (Qmin) Maximum extraction 453 m³/h Intensive extraction rate 705 m³/h

Airbourne acouistical A- 46 dBA weighted sound Power **Emission at minimum** speed (SPEmin) Airborne acoustical A-62 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Airbourne acoustical A- 71 dBA weighted sound power emission at boost speed (SPEboost) Time increase factor (F) **Energy Efficiency Index** 54.0 per first cavity Measured air flow rate 385 m³/h at best efficiency point (Qbep) Measured air pressure 461 Pa at best efficiency point (Qbep) Measured electric 161 W power input at best efficiency point (Wbep) Normal Power of the 7 W light system (WI) Average illumination of 209 lux the light on the cooking surface (Emiddle) Sound power level at 62 dBA highest setting (Lwa)

SMEG SPA 14/12/2025




Electrical Connection

Nominal power Voltage 238 W 220-240 V

Frequency (Hz)
Power supply cable
length

50-60 Hz 1500 mm

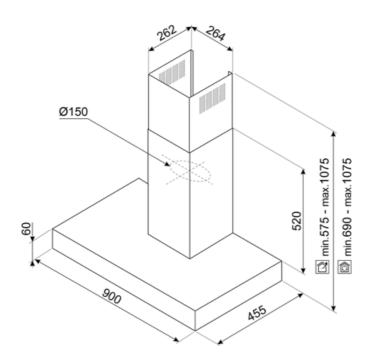

SMEG SPA 14/12/2025



Compatible Accessories



KITCEKBT

Chimney extension, dimensions 261,5 * 260 * 830 mm suitable for T-shape hood KBT* & KBCT*, max hight 1380 mm Stainless Steel



KITFCKBT

1 pcs of activated carbon filter for hood models KBT* / KBCT*

KITFCKBTR



1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

SMEG SPA 14/12/2025



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Connection between hob and hood



...



...

SMEG SPA 14/12/2025