

# KBT9L4VN


Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709305734
Hood width	90 cm







## Aesthetics

Aesthetic	Universale	Glass Type	Black
Colour	Stainless Steel and Glass	Serigraphy colour	Black
Finishing	Satin	Logo	Silk screen

## Controls

			
Control setting	Touch control back-lighted	Display	Yes
Led color	White		

## Programs / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	

## Technical Features



No. of lights	1	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light Power	7.3 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light color temperature range	3000° - 5700° °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	730 m³/h	Minimum distance from ELECTRIC hob	500 mm
Motor power	230 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	252	48
Speed 2	341	55
Speed 3	453	62
Intensive speed	705	72

## Accessories Included

Tube reduction	Yes
----------------	-----

## Performance / Energy Label

A

Annual Efficiency Consumption (AEchood)	58 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	62 dB(A)
Energy efficiency class (EEC)	A	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	71 dB(A)
Fluid Dynamic Efficiency (FDE)	30,5	Power consumption in stand-by mode (Ps)	0,42 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,9
Lighting Efficiency (LE)	28,2 lux/W	Energy Efficiency Index	54,0
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	385 m³/h
Grease Filtering Efficiency (GFE)	73,7 %	Measured air pressure at best efficiency point (Pbep)	461 Pa
Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	161 W
Air flow at minumum speed (Qmin)	252 m³/h	Nominal Power consumption of the light system (WL)	7 W
Air flow at maximum speed (Qmax)	453 m³/h		
Air flow at boost speed (Qboost)	705 m³/h		

Airbourne acoustical A- 46 dB(A)  
weighted sound Power  
Emission at minimum  
speed (SPEmin)

Average illumination of  
the light on the cooking  
surface (Emiddle)

209 lux

Sound power level at  
highest setting (Lwa)

62 dB(A)

## Electrical Connection

Electrical connection  
rating

238 W

Frequency (Hz)


50-60 Hz

Voltage

220-240 V

Power supply cable  
length


1500 mm

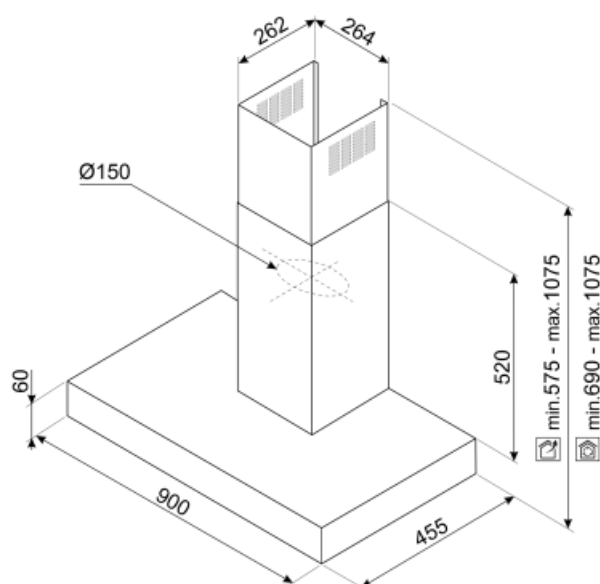

---


## Not included accessories

---



### KITFCKBT

1 pcs di filtro a carboni attivi per i modelli di cappe KBT\* / KBCT\*



### KITFCKBTR












1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models.  
\* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm



### KITCEKBT

Chimney extension, dimensions 261,5 \* 260 \* 830 mm suitable for T-shape hood KBT\* & KBCT\*, max hight 1380 mm Stainless Steel

## Symbols glossary (TT)

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		A: Product drying performance, measured from A+++ to D / G depending on the product family
	Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	LED display: to show programmes, functions and options selected and the time to the end of the cycle.		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Intensive/turbo setting: when extra fast extraction is required.
	Connection between hob and hood		Dimmering Lights
	Tunable white from warm to cold		