

# KBT9L4VN


|                    |                      |
|--------------------|----------------------|
| Product family     | Hood                 |
| Hood Type          | Decorative wall hood |
| Design             | T flat               |
| Extraction         | Extraction           |
| Electronic control | Yes                  |
| Material           | Stainless steel      |
| Type of steel      | Brushed              |
| EAN code           | 8017709305734        |
| Hood width         | 90 cm                |






## Aesthetics

|           |                           |                   |             |
|-----------|---------------------------|-------------------|-------------|
| Aesthetic | Universale                | Glass Type        | Black       |
| Colour    | Stainless Steel and Glass | Serigraphy colour | Black       |
| Finishing | Satin                     | Logo              | Silk screen |

## Controls

|  |                            |         |     |
|--|----------------------------|---------|-----|
|  |                            |         |     |
| Control setting  | Touch control back-lighted | Display | Yes |
| Led color  | White                      |         |     |

## Program / Functions

|                         |   |
|-------------------------|---|
| No. of speeds           | 3   |
| Intensive speed         |  |
| 24h air filter function |  |
| Time-setting options    |  |
| Auto-vent 2.0           |  |

## Technical Features



|                                      |                  |   |           |
|--------------------------------------|------------------|---|-----------|
| <b>No. of lights</b>                 | 1                | <b>No. of filters</b>                     | 3         |
| <b>Light type</b>                    | LED              | <b>Anti-grease filters</b>                | Aluminium |
| <b>Light Power</b>                   | 7.3 W            | <b>Filter replacement indicator</b>       | Yes       |
| <b>Dimmer mode</b>                   | Yes              | <b>Vent outlet</b>                        | 150 mm    |
| <b>Light color temperature range</b> | 3000° - 5700° °K | <b>Minimum distance from GAS hob</b>      | 650 mm    |
| <b>Free outlet maximum capacity</b>  | 730 m³/h         | <b>Minimum distance from ELECTRIC hob</b> | 500 mm    |
| <b>Motor power</b>                   | 230 W            | <b>Non return valve</b>                   | Yes       |

|                 | <b>Extraction rate IEC 61591 [m³/h]</b> | <b>Noise level IEC 60704-2-13 [dBA]</b> |
|-----------------|---|---|
| Speed 1         | 252                                     | 48                                      |
| Speed 2         | 341                                     | 55                                      |
| Speed 3         | 453                                     | 62                                      |
| Intensive speed | 705                                     | 72                                      |

## Accessories Included

|                       |     |
|-----------------------|-----|
| <b>Tube reduction</b> | Yes |
|-----------------------|-----|

## Performance / Energy Label



|   |            |   |          |
|---|------------|---|----------|
| <b>Annual Efficiency Consumption (AEChood)</b>  | 58 kWh/a   | <b>Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)</b>  | 62 dBA   |
| <b>Energy efficiency class (EEC)</b>            | A          | <b>Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)</b> | 71 dBA   |
| <b>Fluid Dynamic Efficiency (FDE)</b>           | 30,5       | <b>Power consumption in stand-by mode (Ps)</b>  | 0,42 W   |
| <b>Fluid Dynamic Efficiency class (FDEC)</b>    | A          | <b>Time increase factor (F)</b>   | 0,9      |
| <b>Lighting Efficiency (LE)</b>                 | 28,2 lux/W | <b>Energy Efficiency Index</b>  | 54,0     |
| <b>Lighting Efficiency Class (LEC)</b>          | A          | <b>Measured air flow rate at best efficiency point (Qbep)</b>                         | 385 m³/h |
| <b>Grease Filtering Efficiency (GFE)</b>        | 73,7 %     | <b>Measured air pressure at best efficiency point (Pbep)</b>                          | 461 Pa   |
| <b>Grease Filtering Efficiency Class (GFEC)</b> | D          | <b>Measured electric power input at best efficiency point (Wbep)</b>                  | 161 W    |
| <b>Air flow at minumum speed (Qmin)</b>         | 252 m³/h   | <b>Nominal Power consumption of the light system (WL)</b>                             | 7 W      |
| <b>Air flow at maximum speed (Qmax)</b>         | 453 m³/h   |   |          |
| <b>Air flow at boost speed (Qboost)</b>         | 705 m³/h   |   |          |


Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin) 46 dBA

Average illumination of the light on the cooking surface (Emiddle) 209 lux  
 Sound power level at highest setting (Lwa) 62 dBA

## Electrical Connection

Plug Not present  
 Electrical connection rating 238 W  
 Voltage 220-240 V

Frequency (Hz) 50-60 Hz  
 Power supply cable length 1500 mm

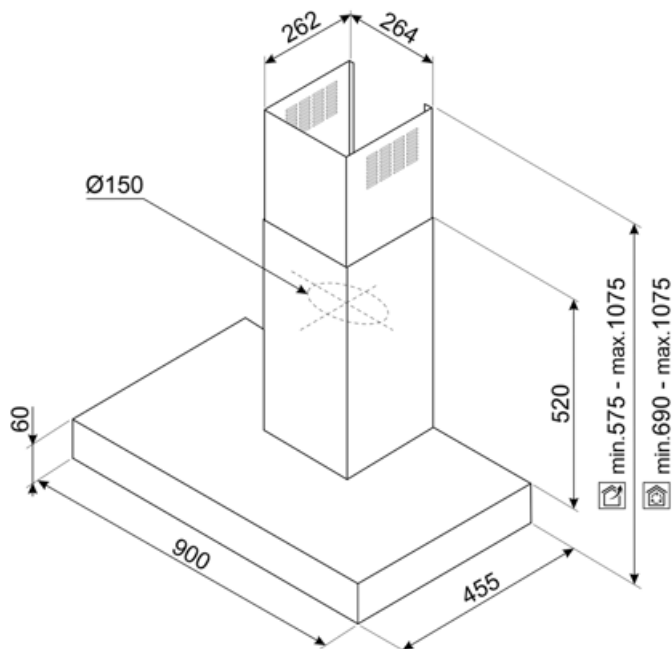

---


## Not included accessories

---




### KITCEKBT

Chimney extension, dimensions 261,5 \* 260 \* 830 mm suitable for T-shape hood KBT\* & KBCT\*, max height 1380 mm Stainless Steel



### KITFCKBT












1 pcs di filtro a carboni attivi per i modelli di cappe KBT\* / KBCT\*



### KITFCKBTR

1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

## Symbols glossary

-  24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.
-  Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
-  LED display: to show programmes, functions and options selected and the time to the end of the cycle.
-  Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
-  Connection between hob and hood
-  Tunable white from warm to cold
-  A+ B
-  Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
-  Warning light(s): to advise when filters need changing.
-  Intensive/turbo setting: when extra fast extraction is required.
-  Dimmering Lights