

KBT9L4VN

Product family Hood

Hood Type Decorative wall hood

Design T flat Extraction Extraction **Electronic control** Yes

Stainless steel Material Type of steel Brushed

EAN code 8017709305734

Hood width 90 cm **Aesthetic** Universale

Colour Stainless Steel and Glass

Finishing Satin Glass Type Black Black Serigraphy colour Logo Silk screen



Controls



Control setting Touch control back-lighted Display

White

Led color White

Yes

3

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options

Auto-vent 2.0







Technical Features













730 m³/h

No. of lights Light type **LED Light Power** 7.3 W

Dimmer mode Yes

Light color temperature 3000 - 5700 K range

Free outlet maximum

capacity



No. of filters

Anti-grease filters Aluminium Filter replacement Yes

indicator

Vent outlet 150 mm Minimum distance from 650 mm

GAS hob

SMEG SPA 2025/11/29



Motor power 230 W Minimum distance from

500 mm

ELECTRIC hob

Non return valve

Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	252	48
Speed 2	341	55
Speed 3	453	62
Intensive speed	705	72

Accessories Included

Tube reduction Yes

Performance / Energy Label

A T

Annual Efficiency 58 kWh/a Consumption (AEChood) Energy efficieency class A (EEC)

Fluid Dynamic Efficiency 30,5 (FDE)

Fluid Dynamic Efficiency A class (FDEC)

Lighting Efficiency (LE) 28.2 lux/W

73,7 %

Lighting Efficiency Class A (LEC)

Grease Filtering

Efficiency (GFE) **Grease Filtering**

Efficiency Class (GFEC)

Air flow at minumum 252 m³/h speed (Qmin)

Air flow at maximum

453 m³/h

speed (Qmax)

Air flow at boost speed 705 m³/h

(Qboost)

Airbourne acouistical A- 46 dBA weighted sound Power

Emission at minimum speed (SPEmin)

Airborne acoustical A-62 dBA

weighted sound Power **Emission at maximum** speed (SPEmax)

Airbourne acoustical A- 71 dBA weighted sound power

emission at boost speed (SPEboost)

Time increase factor (F) 0,9 **Energy Efficiency Index** 54.0 Measured air flow rate 385 m³/h

at best efficiency point (Qbep)

Measured air pressure

461 Pa at best efficiency point

(Pbep)

Measured electric 161 W power input at best

efficiency point (Wbep) **Nominal Power**

consumption of the light system (WL)

Average illumination of the light on the cooking

surface (Emiddle)

Sound power level at highest setting (Lwa) 209 lux

7 W

62 dBA

SMEG SPA 2025/11/29



Electrical Connection

Electrical connection

238 W


rating

Voltage 220-240 V Frequency (Hz) 50-60 Hz Power supply cable

length

Plug Not present

1500 mm

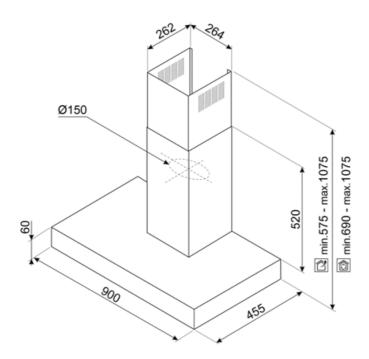

SMEG SPA 2025/11/29



Compatible Accessories



KITCEKBT

Chimney extension, dimensions 261,5 * 260 * 830 mm suitable for T-shape hood KBT* & KBCT*, max hight 1380 mm Stainless Steel



KITFCKBT

1 pcs di filtro a carboni attivi per i modelli di cappe KBT* / KBCT*

KITFCKBTR



1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

SMEG SPA 2025/11/29



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Connection between hob and hood



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



0

Dimmering Lights



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Tunable white from warm to cold



Intensive/turbo setting: when extra fast extraction is required.

SMEG SPA 2025/11/29