

# KBT9L4VN


Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709305734
Hood width	90 cm







## Aesthetics

Aesthetic	Universale	Glass Type	Black
Colour	Stainless Steel and Glass	Serigraphy colour	Black
Finishing	Satin	Logo	Silk screen

## Controls

			
Control setting	Touch control back-lighted	Display	Yes
Led color	White		

## Programme / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	

## Technical Features



<b>No. of lights</b>	1	<b>No. of filters</b>	3
<b>Light type</b>	LED	<b>Anti-grease filters</b>	Aluminium
<b>Light Power</b>	7.3 W	<b>Filter replacement indicator</b>	Yes
<b>Dimmer mode</b>	Yes	<b>Vent outlet</b>	150 mm
<b>Light color temperature range</b>	3000° - 5700° °K	<b>Minimum distance from GAS hob</b>	650 mm
<b>Free outlet maximum capacity</b>	730 m³/h	<b>Minimum distance from ELECTRIC hob</b>	500 mm
<b>Motor power</b>	230 W	<b>Non return valve</b>	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	252	48
Speed 2	341	55
Speed 3	453	62
Intensive speed	705	72

## Accessories Included

**Tube reduction** Yes

## Performance / Energy Label

<b>Annual Efficiency Consumption (AEChood)</b>	58 kWh/a	<b>Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)</b>	62 dB(A)
<b>Energy efficiency class (EEC)</b>	A	<b>Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)</b>	71 dB(A)
<b>Fluid Dynamic Efficiency (FDE)</b>	30,5	<b>Power consumption in stand-by mode (Ps)</b>	0,42 W
<b>Fluid Dynamic Efficiency class (FDEC)</b>	A	<b>Time increase factor (F)</b>	0,9
<b>Lighting Efficiency (LE)</b>	28,2 lux/W	<b>Energy Efficiency Index</b>	54,0
<b>Lighting Efficiency Class (LEC)</b>	A	<b>Measured air flow rate at best efficiency point (Qbep)</b>	385 m³/h
<b>Grease Filtering Efficiency (GFE)</b>	73,7 %	<b>Measured air pressure at best efficiency point (Pbep)</b>	461 Pa
<b>Grease Filtering Efficiency Class (GFEC)</b>	D	<b>Measured electric power input at best efficiency point (Wbep)</b>	161 W
<b>Air flow at minumum speed (Qmin)</b>	252 m³/h	<b>Nominal Power consumption of the light system (WL)</b>	7 W
<b>Air flow at maximum speed (Qmax)</b>	453 m³/h		
<b>Air flow at boost speed (Qboost)</b>	705 m³/h		


Airbourne acoustical A- 46 dB(A)  
 weighted sound Power  
 Emission at minimum  
 speed (SPEmin)

Average illumination of 209 lux  
 the light on the cooking  
 surface (Emiddle)  
 Sound power level at  
 highest setting (Lwa) 62 dB(A)

## Electrical Connection

Electrical connection 238 W  
 rating  
 Voltage 220-240 V


Frequency (Hz) 50-60 Hz  
 Power supply cable  
 length 1500 mm

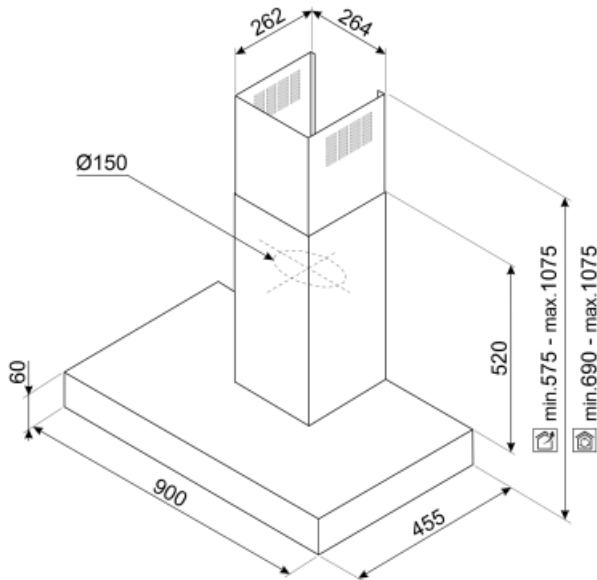

---


## Not included accessories

---



### KITFCKBT

1 pcs di filtro a carboni attivi per i modelli di cappe KBT\* / KBCT\*



### KITFCKBTR












1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models.  
\* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm



### KITCEKBT

Chimney extension, dimensions 261,5 \* 260 \* 830 mm suitable for T-shape hood KBT\* & KBCT\*, max hight 1380 mm Stainless Steel

## Symbols glossary (TT)

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Connection between hob and hood		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Dimming Lights		LED display: to show programmes, functions and options selected and the time to the end of the cycle.
	A: Product drying performance, measured from A+++ to D / G depending on the product family		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Intensive/turbo setting: when extra fast extraction is required.
	Tunable white from warm to cold		