

# KBT9L4VN

**Product family** Hood

**Hood Type** Decorative wall hood

Design T flat Extraction Extraction **Electronic control** Yes

Stainless steel Material Type of steel Brushed

EAN code 8017709305734

Hood width 90 cm **Aesthetic** Universale

Colour Stainless Steel and Glass

**Finishing** Satin Glass Type Black Black Serigraphy colour Logo Silk screen



### **Controls**



Control setting Touch control back-lighted Display Yes

White

Led color White

## **Program / Functions**

No. of speeds Intensive speed

24h air filter function

Time-setting options

Auto-vent 2.0







### **Technical Features**













No. of lights Light type **LED Light Power** 7.3 W

Dimmer mode

range

capacity

Free outlet maximum

Yes

Light color temperature 3000 - 5700 K

730 m<sup>3</sup>/h

No. of filters

**Anti-grease filters** 

Filter replacement

Aluminium Yes

3

indicator

Vent outlet Minimum distance from

150 mm 650 mm

GAS hob



Motor power 230 W

Minimum distance from

500 mm

**ELECTRIC** hob

Non return valve

Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	252	48
Speed 2	341	55
Speed 3	453	62
Intensive speed	705	72

### Accessories included

Tube reduction Yes

### Performance / Energy Label

	_	K-
$\langle \  $		Ď

58 kWh/a **Annual Efficiency** Consumption (AEChood) Energy efficieency class A (EEC) Fluid Dynamic Efficiency 30,5 (FDE) Fluid Dynamic Efficiency A class (FDEC) Lighting Efficiency (LE) 28.2 lux/W Lighting Efficiency Class A (LEC) **Grease Filtering** 73,7 % Efficiency (GFE) **Grease Filtering** Efficiency Class (GFEC) Air flow at minumum 252 m<sup>3</sup>/h speed (Qmin) Air flow at maximum 453 m<sup>3</sup>/h speed (Qmax) Air flow at boost speed 705 m<sup>3</sup>/h (Qboost)

Airbourne acouistical A- 46 dBA weighted sound Power **Emission at minimum** speed (SPEmin) Airborne acoustical A-62 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Airbourne acoustical A- 71 dBA weighted sound power emission at boost speed (SPEboost) Time increase factor (F) 0,9 **Energy Efficiency Index** 54.0 Measured air flow rate 385 m<sup>3</sup>/h at best efficiency point (Qbep) Measured air pressure 461 Pa at best efficiency point (Pbep) Measured electric 161 W power input at best efficiency point (Wbep) **Nominal Power** 7 W consumption of the light system (WL) Average illumination of 209 lux the light on the cooking surface (Emiddle) Sound power level at 62 dBA highest setting (Lwa)



## **Electrical Connection**

**Electrical connection** 

238 W


rating

Voltage 220-240 V Frequency (Hz) 50-60 Hz Power supply cable

length

Plug Not present

1500 mm

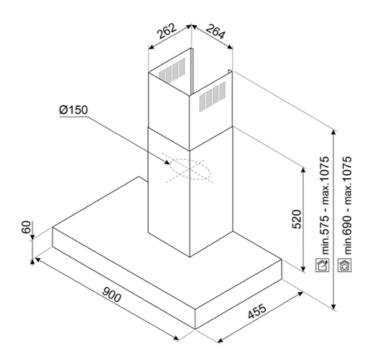



## **Compatible Accessories**



### **KITCEKBT**

Chimney extension, dimensions 261,5 \* 260 \* 830 mm suitable for T-shape hood KBT\* & KBCT\*, max hight 1380 mm Stainless Steel



#### **KITFCKBT**

1 pc of charcoal filter for the hood models KBT\* / KBCT\*

#### **KITFCKBTR**



1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm



### Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Connection between hob and hood



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Energy efficiency class A



**Dimmering Lights** 



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Tunable white from warm to cold