

KBT9L4VN

Product family Hood

Hood Type Decorative wall hood

Design T flat Extraction Extraction **Electronic control** Yes

Stainless steel Material Type of steel Brushed

EAN code 8017709305734

Hood width 90 cm **Aesthetic** Universale

Colour Stainless Steel and Glass

Finishing Satin Glass Type Black Black Serigraphy colour Logo Silk screen



Controls



Control setting Touch control back-lighted Display Yes

White

Led color White

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options

Auto-vent 2.0









Technical Features













No. of lights Light type **LED** 7.3 W **Light Power**

Dimmer mode Light color temperature 3000 - 5700 K

range

Free outlet maximum capacity

Yes

730 m³/h

No. of filters

Anti-grease filters

Filter replacement

indicator

Vent outlet Minimum distance from

150 mm 650 mm

Aluminium

3

Yes

GAS hob



Motor power 230 W

Minimum distance from

500 mm

ELECTRIC hob

Non return valve

Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	252	48
Speed 2	341	55
Speed 3	453	62
Intensive speed	705	72

Accessories included

Tube reduction Yes

Performance / Energy Label

58 kWh/a **Annual Efficiency** Consumption (AEChood) Energy efficieency class A (EEC) Fluid Dynamic Efficiency 30.5 (FDE) Fluid Dynamic Efficiency A class (FDEC) Lighting Efficiency (LE) 28.2 lux/W Lighting Efficiency Class A (LEC) **Grease Filtering** 73.7 % Efficiency (GFE) **Grease Filtering** Efficiency Class (GFEC) Air flow at minumum 252 m³/h speed (Qmin) Air flow at maximum 453 m³/h speed (Qmax) Air flow at boost speed 705 m³/h (Qboost)

Airbourne acouistical A- 46 dBA weighted sound Power **Emission at minimum** speed (SPEmin) Airborne acoustical A-62 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Airbourne acoustical A- 71 dBA weighted sound power emission at boost speed (SPEboost) Time increase factor (F) 0.9 **Energy Efficiency Index** 54 0 Measured air flow rate 385 m³/h at best efficiency point (Qbep) Measured air pressure 461 Pa at best efficiency point (Pbep) Measured electric 161 W power input at best efficiency point (Wbep) **Nominal Power** 7 W consumption of the light system (WL) Average illumination of 209 lux the light on the cooking surface (Emiddle) Sound power level at 62 dBA highest setting (Lwa)



Electrical Connection

Electrical connection

238 W


rating

Voltage 220-240 V Frequency (Hz) 50-60 Hz Power supply cable

length

Plug Not present

1500 mm

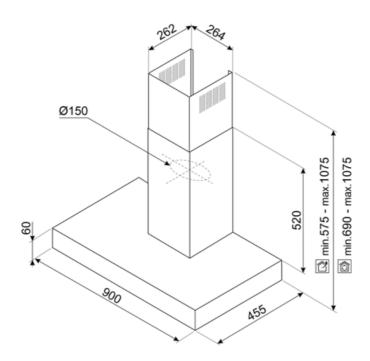



Compatible Accessories



KITCEKBT

Chimney extension, dimensions 261,5 * 260 * 830 mm suitable for T-shape hood KBT* & KBCT*, max hight 1380 mm Stainless Steel



KITFCKBT

1 pc of charcoal filter for the hood models KBT* / KBCT*

KITFCKBTR



1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Energy efficiency class A



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Connection between hob and hood



Dimmering Lights



Tunable white from warm to cold