

KBTI9L4VN

Product family	Hood
Hood Type	Island Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless Steel + Glass
Type of steel	Brushed
EAN code	8017709305741
Hood width	90 cm








Aesthetics

Aesthetics	Universal	Finishing	Brushed
Colour	Stainless steel	Logo	Silk screen

Controls

			
Control setting	Touch control	Led colour	White

Technical Features

    			
No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light power	7.3 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light colour	3000° - 5700° °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	820 m ³ /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	280	48

Speed 2	415	59
Speed 3	626	69
Intensive speed	778	74

Accessories Included

Tube reduction Yes


Performance / Energy Label




Annual Efficiency Consumption (AEChood)	49 KWh/year	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	47 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	69 dBA
Fluid Dynamic Efficiency (FDE)	35.4	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	73 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Power consumption in stand-by mode (Ps)	0.38 W
Lighting Efficiency (LE)	23.5 lux/W	Energy Efficiency Index per first cavity	46.4
Lighting Efficiency Class (LEC)	B	Measured air flow rate at best efficiency point (Qbep)	397 m ³ /h
Grease Filtering Efficiency (GFE)	77.4 %	Measured air pressure at best efficiency point (Qbep)	474 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	175 W
Air flow at minumum speed (Qmin)	280 m ³ /h	Normal Power of the light system (WI)	15 W
Maximum extraction rate	626 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	348 lux
Intensive extraction rate	778 m ³ /h	Sound power level at highest setting (Lwa)	69 dBA

Electrical Connection

Voltage	220-240 V	Power supply cable length	1500 mm
Frequency (Hz)	50-60 Hz		

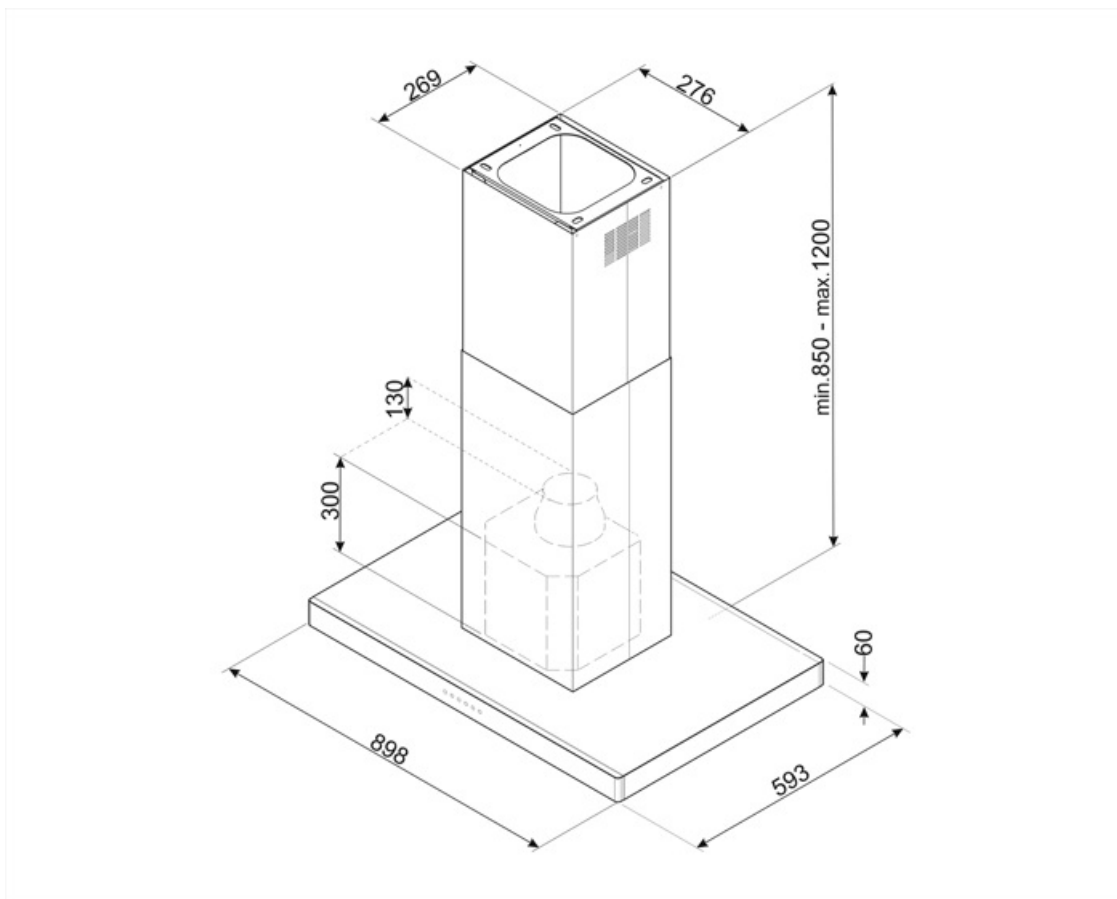


Not included accessories



KITFCKBT

1 pcs of activated carbon filter for hood models KBT* / KBCT*



KITFCKBTR












1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models.
* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	...		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	A: Product drying performance, measured from A+++ to D / G depending on the product family		...
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.		Intensive/turbo setting: when extra fast extraction is required.
	...		