

KBTI9L4VN

Product family	Hood
Hood Type	Island Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless Steel + Glass
Type of steel	Brushed
EAN code	8017709305741
Aesthetics	Universal
Colour	Stainless steel
Finishing	Brushed
Logo	Silk screen







Controls








Control setting	Touch control	Led colour	White
-----------------	---------------	------------	-------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	

Technical Features

				
No. of lights	2	No. of filters	3	
Light type	LED	Anti-grease filters	Aluminium	
Light power	7.3 W	Filter replacement indicator	Yes	
Dimmer mode	Yes	Vent outlet	150 mm	
Light colour	3000° - 5700° °K	Minimum distance from GAS hob	650 mm	
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	650 mm	
Motor power	275 W	Non return valve	Yes	

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	280	48
Speed 2	415	59
Speed 3	626	69
Intensive speed	778	74

Accessories Included

Tube reduction Yes

Performance / Energy Label



Annual Efficiency Consumption (AEChood) 49 KWh/year

Energy efficiency class (EEC) A

Fluid Dynamic Efficiency (FDE) 35.4

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 23.5 lux/W

Lighting Efficiency Class (LEC) B

Grease Filtering Efficiency (GFE) 77.4 %

Grease Filtering Efficiency Class (GFEC) C

Air flow at minumum speed (Qmin) 280 m³/h

Maximum extraction rate 626 m³/h

Intensive extraction rate 778 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 47 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 69 dBA

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 73 dBA

Energy Efficiency Index per first cavity 46.4

Measured air flow rate at best efficiency point (Qbep) 397 m³/h

Measured air pressure at best efficiency point (Qbep) 474 Pa

Measured electric power input at best efficiency point (Wbep) 175 W

Normal Power of the light system (WI) 15 W

Average illumination of the light on the cooking surface (Emiddle) 348 lux


Sound power level at highest setting (Lwa) 69 dBA

Electrical Connection

Voltage 220-240 V

Frequency (Hz) 50-60 Hz

Power supply cable length 1500 mm

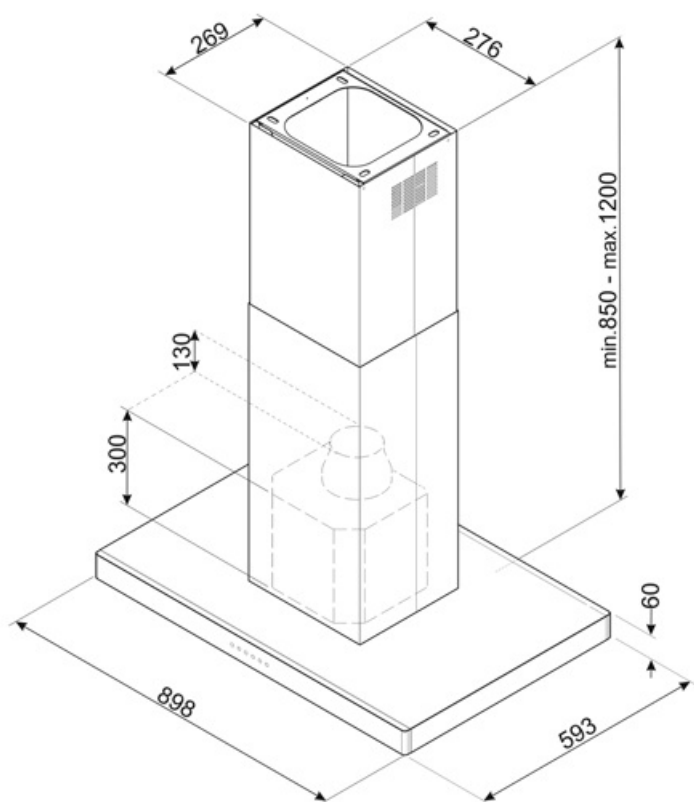

Compatible Accessories




KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCKBT












1 pcs of activated carbon filter for hood models KBT* / KBCT*



KITFCKBTR

1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	A: Product drying performance, measured from A+++ to D / G depending on the product family		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.		Intensive/turbo setting: when extra fast extraction is required.
	...		...
	...		

Benefit

Autovent 2.0

Centralised and practical control via Bluetooth connection between hob and hood, letting you manage extraction automatically while you cook.

The Auto-Vent 2.0 system enables automatic hood management through connection with the hob: both appliances switch on simultaneously, and the extraction power adjusts in real time to the cooking intensity.