

KBTI9L4VN

Product family

Hood Type Decorative island hood

Hood

Design T flat
Extraction Extraction
Electronic control Yes

Material Stainless Steel + Glass

Type of steel Brushed

EAN code 8017709305741

Hood width 90 cm



Aesthetics

AestheticUniversaleFinishingSatinColourStainless steelLogoSilk screen

Controls

Control setting Touch control Led color White

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options

Auto-vent 2.0





Technical Features



No. of lights2No. of filters3Light typeLEDAnti-grease filtersAluminium

Light Power 7.3 W



Dimmer mode Yes

Light color temperature

range

Free outlet maximum

Motor power

capacity

3000° - 5700° °K

820 m³/h

275 W

Filter replacement

indicator

Vent outlet 150 mm

Yes

650 mm

650 mm

Minimum distance from

GAS hob

Minimum distance from

ELECTRIC hob

Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	280	48
Speed 2	415	59
Speed 3	626	69
Intensive speed	778	74

Yes

280 m³/h

Accessories Included

Tube reduction

Performance / Energy Label

A †

Annual Efficiency 49 kWh/a

Consumption (AEChood) Energy efficieency class A

(EEC)

Fluid Dynamic Efficiency 35,4

(FDE)

Fluid Dynamic Efficiency A

class (FDEC)

Lighting Efficiency (LE) 23,5 lux/W

Lighting Efficiency Class B

(LEC)

Grease Filtering 77,4 %

Efficiency (GFE)

Grease Filtering Efficiency Class (GFEC)

Air flow at minumum

speed (Qmin)

Air flow at maximum 626 m³/h

speed (Qmax)

Air flow at boost speed 778 m³/h

(Qboost)

Airbourne acouistical A- 47 dBA

weighted sound Power **Emission at minimum** speed (SPEmin)

Airborne acoustical A-69 dBA

weighted sound Power **Emission at maximum** speed (SPEmax)

Airbourne acoustical A- 73 dBA

weighted sound power emission at boost speed

(SPEboost)

Power consumption in 0,38 W

stand-by mode (Ps)

Energy Efficiency Index 46.4 397 m³/h

Measured air flow rate at best efficiency point

(Qbep)

Measured air pressure 474 Pa

at best efficiency point

(Pbep)

Measured electric 175 W

power input at best efficiency point (Wbep)

Nominal Power 15 W

consumption of the light

system (WL)

21/01/2025 **SMEG SPA**



Average illumination of the light on the cooking surface (Emiddle)


Sound power level at highest setting (Lwa)

69 dBA

348 lux

Electrical Connection

Plug Not present Frequency (Hz) 50-60 Hz
Voltage 220-240 V Power supply cable 1500 mm length

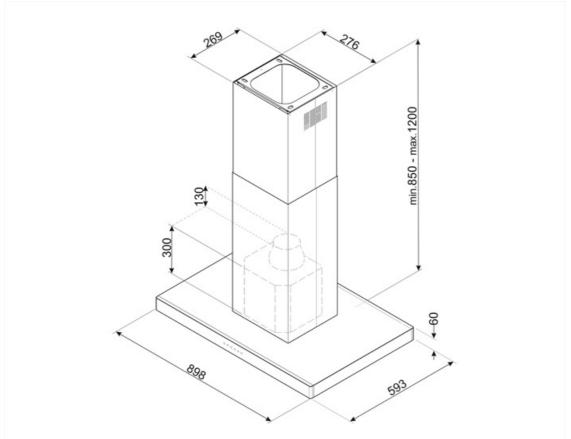



Not included accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCKBT

1 pcs di filtro a carboni attivi per i modelli di cappe KBT* / KBCT*

KITFCKBTR



1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.





Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Intensive/turbo setting: when extra fast extraction is required.



Connection between hob and hood



Dimmering Lights



Tunable white from warm to cold