

KBTI9L4VN

Product family	Hood
Hood Type	Decorative island hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless Steel + Glass
Type of steel	Brushed
EAN code	8017709305741
Hood width	90 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Silk screen



Controls



Control setting

Touch control

Led color

White

Program / Functions

No. of speeds

3

Intensive speed



24h air filter function



Time-setting options



Auto-vent 2.0



Technical Features



No. of lights

2

No. of filters

3

Light type

LED

Anti-grease filters

Aluminium

Light Power

7,3 W

Filter replacement

Yes

Dimmer mode

Yes

indicator

Light color temperature range

3000 - 5700 K

Vent outlet

150 mm

Free outlet maximum capacity

820 m³/h

Minimum distance from GAS hob

650 mm

Motor power

275 W

Minimum distance from ELECTRIC hob

650 mm

Non return valve

Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	280	48
Speed 2	415	59
Speed 3	626	69
Intensive speed	778	74

Accessories included

Tube reduction Yes

Performance / Energy Label


	Annual Efficiency Consumption (AEChood)	49 kWh/a	Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)	47 dBA
	Energy efficiency class (EEC)	A	Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)	69 dBA
	Fluid Dynamic Efficiency (FDE)	35,4	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	73 dBA
	Fluid Dynamic Efficiency class (FDEC)	A	Energy Efficiency Index	46,4
	Lighting Efficiency (LE)	23,5 lux/W	Measured air flow rate at best efficiency point (Qbep)	397 m³/h
	Lighting Efficiency Class (LEC)	B	Measured air pressure at best efficiency point (Pbep)	474 Pa
	Grease Filtering Efficiency (GFE)	77,4 %	Measured electric power input at best efficiency point (Wbep)	175 W
	Grease Filtering Efficiency Class (GFEC)	C	Nominal Power consumption of the light system (WL)	15 W
	Air flow at minimum speed (Qmin)	280 m³/h	Average illumination of the light on the cooking surface (Emiddle)	348 lux
	Air flow at maximum speed (Qmax)	626 m³/h	Sound power level at highest setting (Lwa)	69 dBA
	Air flow at boost speed (Qboost)	778 m³/h		

Electrical Connection

Voltage	220-240 V	Power supply cable length	1500 mm
Frequency (Hz)	50-60 Hz		

Plug

Not present

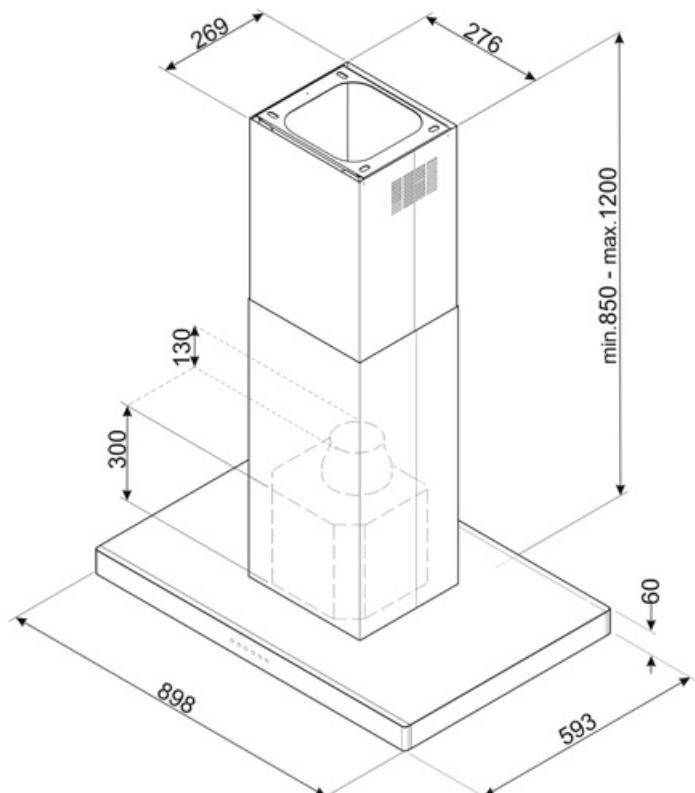


Compatible Accessories




KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCKBT

1 pc of charcoal filter for the hood models KBT* / KBCT*



KITFCKBTR

1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Connection between hob and hood		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Energy efficiency class A		Dimmering Lights
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.		Tunable white from warm to cold.
	Intensive/turbo setting: when extra fast extraction is required.		