

KBTI9L4VN

Product family Hood

Hood Type Decorative island hood

Design T flat Extraction Extraction **Electronic control** Yes

Stainless Steel + Glass Material

Type of steel Brushed

EAN code 8017709305741

Hood width 90 cm **Aesthetic** Universale Colour Stainless steel

Finishing Satin Logo Silk screen



Controls



Control setting Touch control Led color White

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options

Auto-vent 2.0









Technical Features













No. of lights 2 Light type LED **Light Power** 7,3 W Dimmer mode Yes

Light color temperature 3000 - 5700 K

range

Free outlet maximum

capacity

820 m³/h

Motor power 275 W No. of filters

Anti-grease filters

Filter replacement

indicator

Vent outlet Minimum distance from

GAS hob

Minimum distance from

ELECTRIC hob

650 mm

150 mm

650 mm

Aluminium

3

Yes

Non return valve Yes

SMEG SPA 12/7/2025



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	280	48
Speed 2	415	59
Speed 3	626	69
Intensive speed	778	74

Accessories included

Tube reduction Yes

Performance / Energy Label

	A****
	7
	Ď

Annual Efficiency 49 kWh/a Consumption (AEChood) Energy efficieency class A Fluid Dynamic Efficiency 35,4 (FDE) Fluid Dynamic Efficiency A class (FDEC) Lighting Efficiency (LE) 23,5 lux/W Lighting Efficiency Class B (LEC) **Grease Filtering** 77,4 % Efficiency (GFE) **Grease Filtering** Efficiency Class (GFEC) Air flow at minumum 280 m³/h speed (Qmin) Air flow at maximum 626 m³/h speed (Qmax) Air flow at boost speed 778 m³/h (Qboost)

Airbourne acouistical A- 47 dBA weighted sound Power **Emission at minimum** speed (SPEmin) Airborne acoustical A-69 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Airbourne acoustical A- 73 dBA weighted sound power emission at boost speed (SPEboost) **Energy Efficiency Index** 46,4 Measured air flow rate 397 m³/h at best efficiency point (Qbep) Measured air pressure 474 Pa at best efficiency point (Pbep) Measured electric 175 W power input at best efficiency point (Wbep) **Nominal Power** 15 W

consumption of the light system (WL) Average illumination of 348 lux

the light on the cooking surface (Emiddle)

Sound power level at highest setting (Lwa)


69 dBA

Electrical Connection

Voltage 220-240 V Power supply cable 1500 mm length Frequency (Hz) 50-60 Hz

SMEG SPA 12/7/2025



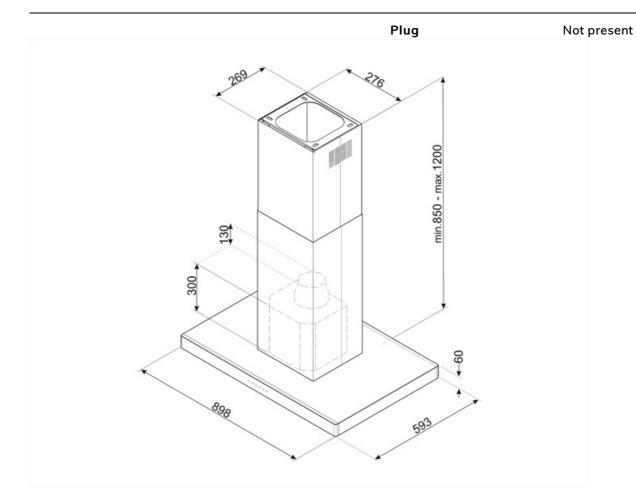

SMEG SPA 12/7/2025



Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCKBT

1 pc of charcoal filter for the hood models KBT* / KBCT*

KITFCKBTR



1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

SMEG SPA 12/7/2025



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Energy efficiency class A



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Intensive/turbo setting: when extra fast extraction is required.



Connection between hob and hood



Dimmering Lights



Tunable white from warm to cold

SMEG SPA 12/7/2025