

# KBTU48X

|                    |                      |
|--------------------|----------------------|
| Product family     | Hood                 |
| Hood Type          | Decorative wall hood |
| Design             | T flat               |
| Extraction         | Extraction           |
| Electronic control | Yes                  |
| Material           | Stainless steel      |
| Type of steel      | Brushed              |
| EAN code           | 8017709351540        |
| Hood width         | 48 "                 |
| Aesthetic          | Universale           |
| Colour             | Stainless steel      |
| Logo               | Embossed             |



## Controls

|                 |                                     |
|-----------------|-------------------------------------|
| Control setting | Touch control back-lighted<br>White |
|-----------------|-------------------------------------|

## Program / Functions

|                         |   |
|-------------------------|---|
| No. of speeds           | 3   |
| Intensive speed         |  |
| 24h air filter function |  |
| Time-setting options    |  |

## Technical Features



|                                   |           |                                    |           |
|-----------------------------------|-----------|------------------------------------|-----------|
| No. of lights                     | 2         | No. of filters                     | 4         |
| Light type                        | LED       | Anti-grease filters                | Aluminium |
| Light Power                       | 1,3 W     | Filter replacement indicator       | Yes       |
| Dimmer mode                       | Yes       | Vent outlet                        | 5 7/8 "   |
| Light color temperature scale (K) | 3000 K    | Minimum distance from GAS hob      | 750 "     |
| Free outlet maximum capacity      | 553.5 CFM | Minimum distance from ELECTRIC hob | 650 "     |
| Motor power                       | 230 W     | Non return valve                   | Yes       |

|                 |       |    |
|-----------------|-------|----|
|                 | □     | □  |
| Intensive speed | 419.5 | 72 |

## Accessories Included


Tube reduction            Yes

## Electrical Connection

|                |           |                           |        |
|----------------|-----------|---------------------------|--------|
| Voltage        | 110-127 V | Power supply cable length | 1500 " |
| Frequency (Hz) | 60 Hz     | Plug                      | No     |

## Also available

Alternative colours available            Matt white, Matt Black

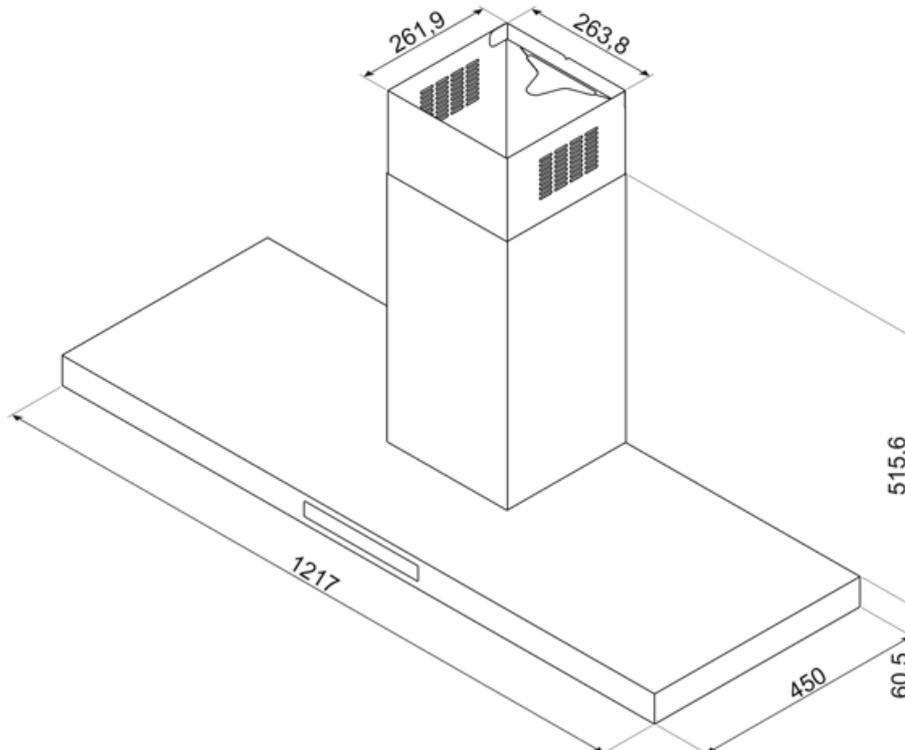

---


## Compatible Accessories

---




### KITCEKBT

Chimney extension, dimensions 261,5 \* 260 \* 830 mm suitable for T-shape hood KBT\* & KBCT\*, max height 1380 mm Stainless Steel



### KITFCKBT

1 pcs di filtro a carboni attivi per i modelli di cappe KBT\* / KBCT\*



### KITFCKBTR

1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

---

## Symbols glossary

---

- |  |   |   |   |
|--|---|---|---|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.       |
|  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.                        |  | Dimmering Lights  |
|  | Warning light(s): to advise when filters need changing.   |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |
|  | Intensive/turbo setting: when extra fast extraction is required.  |   |   |