

KC16POE

Product family	Hood
Tipo de Exaustor	Decorative wall hood
Design	Chimney
Extraction	Extraction
Electronic control	No
Perimeter extraction	No
Material	Heat-moulded
EAN code	8017709211738
Aesthetic	Cortina
Colour	Cream
Components finishing	Antique brass
Logotipo	Logotipo aplicado



Controls

Control setting	Control knobs	Control knobs	Cortina
No. of controls	2	Controls colour	Cream

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	No
Other functions	No
Time-setting options	No
Other options	No

Technical Features

			
Hood without motor	No	Motor power	275 W
Remote motor	No	No. of filters	2
No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Charcoal filters included	No
Light Power	1 W	Filter replacement indicator	No
Dimmer mode	No	Vent outlet	150 mm
Escala de temperatura de cor clara (°K)	3000 °K	Non return valve	Yes
Free outlet maximum capacity	820 m³/h		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	337	50
Speed 2	439	57
Speed 3	582	64
Intensive speed	798	71

Accessories Included

Remote control	No	Tube reduction	No
----------------	----	----------------	----

Performance / Energy Label



Consumo anual de energía (CAE exaustor)	56 kWh/a	Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Energy efficiency class (EEC)	A	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	71 dBA
Fluid Dynamic Efficiency (FDE)	25,9	Power consumption in stand-by mode (Ps)	1,00 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	1,00
Lighting Efficiency (LE)	128,6 lux/W	Energy Efficiency Index	52
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	412 m³/h
Grease Filtering Efficiency (GFE)	78 %	Measured air pressure at best efficiency point (Pbep)	451 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	166 W
Air flow at minumum speed (Qmin)	337 m³/h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Qmax)	582 m³/h	Average illumination of the light on the cooking surface (Emiddle)	283 lux
Air flow at boost speed (Qboost)	798 m³/h	Sound power level at highest setting (Lwa)	64 dBA
Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)	50 dBA		

Electrical Connection

Plug	No	Frequency (Hz)	50-60 Hz
Electrical connection rating	277 W	Comprimento do cabo de alimentação	1000 mm

Voltage 220-240 V

Also available

Outras cores disponíveis Antracite

Códigos das outras
cores disponíveis

KC16POE

Optional accessories

Charcoal filter FLT6

Remote control No

Chimney extension No

Vent outlet No

Non return valve


Kit with aesthetic
components

Diffuser kit

No

KITKCS-2/ KITKCX-2/
KITLOGOCR/ KITLOGOAS

No

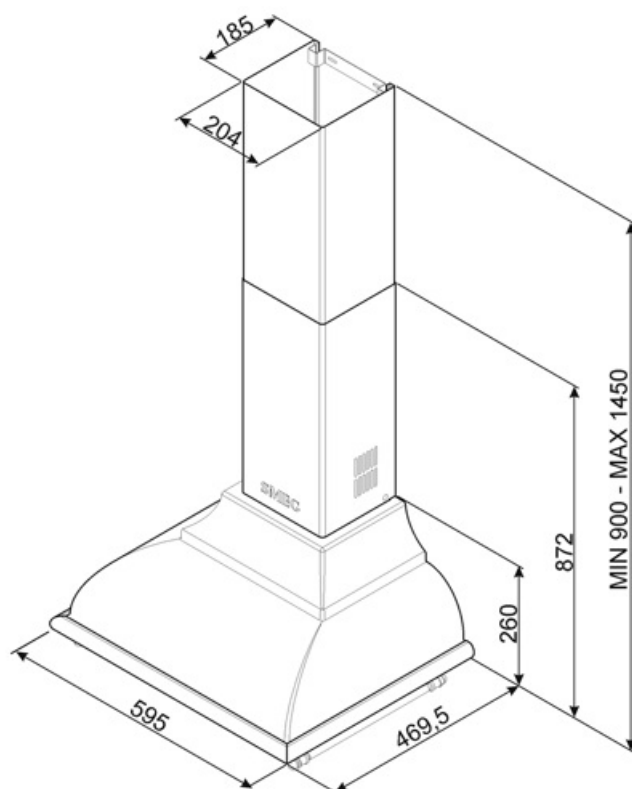

Compatible Accessories




FLT6

Filtros de carvão redondos (kit 2 peças)



KITALLFC

Filtro de carvão universal Aço inoxidável AISI 304 O filtro pode ser lavado na máquina lava-louça a 50 °C (água e detergente adequado) e para secar colocar no forno 180°C 25 minutos



KITKCO-2

LOGOTIPO DO KIT e ACABAMENTO EM LATÃO PARA CORRIMÃO



KITKCX-2

LOGOTIPO DO KIT e ACABAMENTO DO CORRIMÃO CROMADO



KITLOGOAS

KIT LOGO ACABAMENTO PRATEADO ANTIGO



KITLOGOCR

LOGOTIPO DO KIT ACABAMENTO CROMADO

Symbols glossary



R: Desempenho de secagem do produto, medido de A++ a D/G, dependendo da família de produtos



Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.



Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



Configuração intensiva/turbo: quando a extração extra rápida é necessária.