

# KCH62X

Product family Hood

Hood Type Decorative wall hood

DesignChimneyExtractionExtractionElectronic controlYes

MaterialStainless steelType of steelBrushed

**EAN code** 8017709310288

Hood width60 cmAestheticUniversaleColourStainless steel

Finishing Satin
Serigraphy colour Black
Logo Silk screen



#### **Controls**

LED

Control setting Electronic buttons Display 1 a LED

Led color White

# **Program / Functions**

No. of speeds Intensive speed



### **Technical Features**











scale (K)

Free outlet maximum 650 m<sup>3</sup>/h

capacity

Motor power 250 W No. of filters 3 Anti-grease filters Aluminium
Charcoal filters included Yes
Filter replacement Yes

indicator

Vent outlet 150 mm Minimum distance from 650 mm

500 mm

GAS hob

Minimum distance from

ELECTRIC hob

Non return valve Yes



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	245	46
Speed 2	375	56
Speed 3	500	64
Intensive speed	600	68

### Performance / Energy Label

B (\*\*\*)

**Annual Efficiency** 75 kWh/a Consumption (AEChood) Energy efficieency class B (EEC) Fluid Dynamic Efficiency 21,1 (FDE) Fluid Dynamic Efficiency C

class (FDEC)

Lighting Efficiency (LE) 76,1 lux/W

Lighting Efficiency Class A (LEC)

**Grease Filtering** 75.1 % Efficiency (GFE) **Grease Filtering** 

Efficiency Class (GFEC)

Air flow at minumum 245 m<sup>3</sup>/h speed (Qmin)

500 m<sup>3</sup>/h

Air flow at maximum speed (Qmax)

Air flow at boost speed 600 m<sup>3</sup>/h

(Qboost)

Airbourne acouistical A- 46 dBA

weighted sound Power **Emission at minimum** speed (SPEmin)

Airborne acoustical A-64 dBA weighted sound Power **Emission at maximum** 

speed (SPEmax)

Airbourne acoustical A- 68 dBA weighted sound power

emission at boost speed (SPEboost)

Time increase factor (F) 1,2 **Energy Efficiency Index** 69.6 Measured air flow rate 370 m<sup>3</sup>/h at best efficiency point

(Qbep)

Measured air pressure 335 Pa at best efficiency point

(Pbep)

Measured electric 163 W

power input at best efficiency point (Wbep)

**Nominal Power** 5 W consumption of the light system (WL)

Average illumination of

the light on the cooking surface (Emiddle)

Sound power level at highest setting (Lwa)

381 lux

64 dBA

1500 mm

## **Electrical Connection**

**Electrical connection** 255 W

rating


220-240 V Voltage Frequency (Hz) 50-60 Hz

Power supply cable

length

Plug Not present



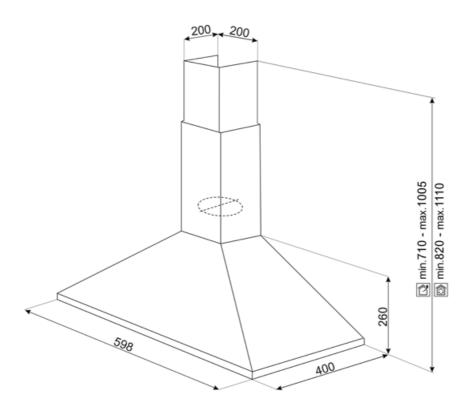



# **Compatible Accessories**

### KITFC500



Round Charcoal filters (kit 2 pieces)



# Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.

