

KCH62X

Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709310288
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Serigraphy colour	Black
Logo	Silk screen



Controls



Control setting	Electronic buttons	Display	1 a LED
Led color	White		

Programs / Functions

No. of speeds	3
Intensive speed	

Technical Features



No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Charcoal filters included	Yes
Light Power	2 W	Filter replacement indicator	Yes
Light color temperature scale (°K)	3500 °K	Vent outlet	150 mm
Free outlet maximum capacity	650 m³/h	Minimum distance from GAS hob	650 mm
Motor power	250 W	Minimum distance from ELECTRIC hob	500 mm
No. of filters	3	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	245	46
Speed 2	375	56
Speed 3	500	64
Intensive speed	600	68

Performance / Energy Label



Annual Efficiency Consumption (AEChood) 75 kWh/a

Energy efficiency class (EEC) B

Fluid Dynamic Efficiency (FDE) 21,1

Fluid Dynamic Efficiency class (FDEC) C

Lighting Efficiency (LE) 76,1 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 75,1 %

Grease Filtering Efficiency Class (GFEC) C

Air flow at minumum speed (Qmin) 245 m³/h

Air flow at maximum speed (Qmax) 500 m³/h

Air flow at boost speed (Qboost) 600 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 46 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 64 dBA

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 68 dBA

Power consumption in stand-by mode (Ps) 0,49 W

Time increase factor (F) 1,2

Energy Efficiency Index 69,6

Measured air flow rate at best efficiency point (Qbep) 370 m³/h

Measured air pressure at best efficiency point (Pbep) 335 Pa

Measured electric power input at best efficiency point (Wbep) 163 W

Nominal Power consumption of the light system (WL) 5 W

Average illumination of the light on the cooking surface (Emiddle) 381 lux

Sound power level at highest setting (Lwa) 64 dBA

Electrical Connection


Plug Not present

Electrical connection rating 255 W

Voltage 220-240 V

Frequency (Hz) 50-60 Hz

Power supply cable length 1500 mm

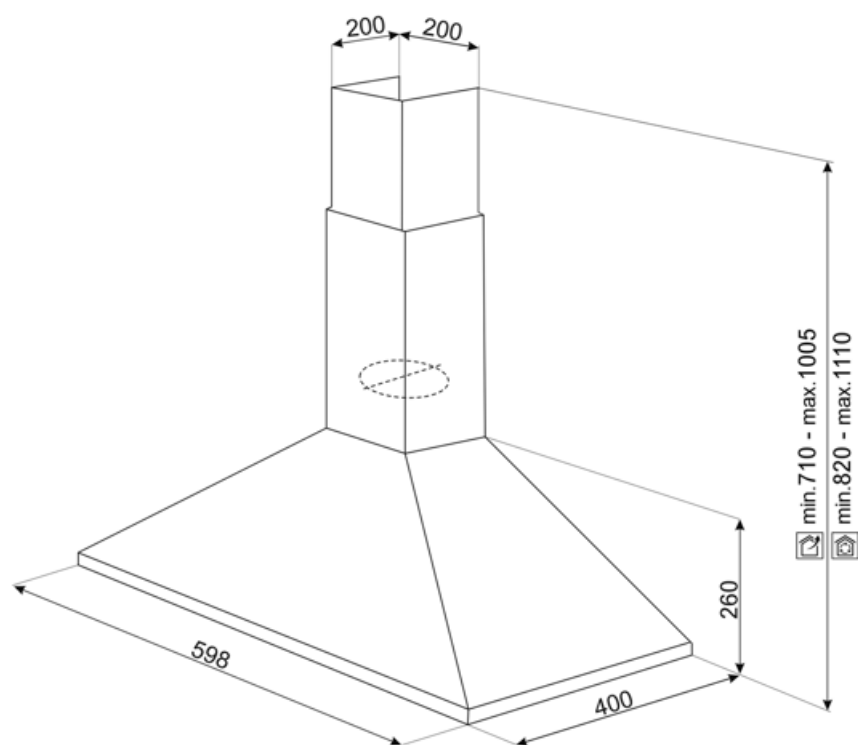

Compatible Accessories



KITFC500

Round Charcoal filters (kit 2 pieces)

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.