

# KCH62X


Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709310288
Hood width	60 cm



## Aesthetics

Aesthetic	Universale	Serigraphy colour	Black
Colour	Stainless steel	Logo	Silk screen
Finishing	Satin		

## Controls

			
Control setting	Electronic buttons	Display	1 a LED
Led color	White		

## Programme / Functions

No. of speeds	3
Intensive speed	

## Technical Features

					
No. of lights	2	Anti-grease filters	Aluminium		
Light type	LED	Charcoal filters included	Yes		
Light Power	2 W	Filter replacement indicator	Yes		
Light color temperature scale (°K)	3500 °K	Vent outlet	150 mm		

Free outlet maximum capacity	650 m³/h	Minimum distance from GAS hob	650 mm
Motor power	250 W	Minimum distance from ELECTRIC hob	500 mm
No. of filters	3	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	245	46
Speed 2	375	56
Speed 3	500	64
Intensive speed	600	68

## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	75 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	64 dB(A)
Energy efficiency class (EEC)	B	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dB(A)
Fluid Dynamic Efficiency (FDE)	21,1	Power consumption in stand-by mode (Ps)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	C	Time increase factor (F)	1,2
Lighting Efficiency (LE)	76,1 lux/W	Energy Efficiency Index	69,6
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	370 m³/h
Grease Filtering Efficiency (GFE)	75,1 %	Measured air pressure at best efficiency point (Pbep)	335 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	163 W
Air flow at minumum speed (Qmin)	245 m³/h	Nominal Power consumption of the light system (WL)	5 W
Air flow at maximum speed (Qmax)	500 m³/h	Average illumination of the light on the cooking surface (Emiddle)	381 lux
Air flow at boost speed (Qboost)	600 m³/h	Sound power level at highest setting (Lwa)	64 dB(A)
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	46 dB(A)		

## Electrical Connection


Plug	Not present	Frequency (Hz)	50-60 Hz
------	-------------	----------------	----------

Electrical connection rating  
Voltage

255 W  
220-240 V

Power supply cable length

1500 mm

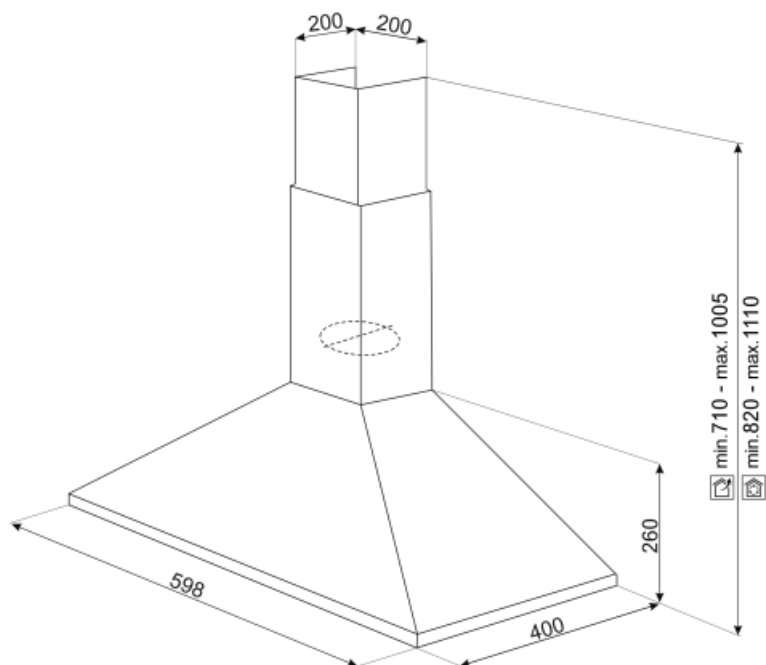

---

## Not included accessories

---



KITFC500

Round Charcoal filters (kit 2 pieces)

---

## Symbols glossary (TT)

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Charcoal filters:** Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



**LED display:** to show programmes, functions and options selected and the time to the end of the cycle.



**Warning light(s):** to advise when filters need changing.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**Intensive/turbo setting:** when extra fast extraction is required.

