

KCH62X

Product family	Hood
Tipo de Exaustor	Decorative wall hood
Design	Chimney
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	No
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709310288
Aesthetic	Universal
Colour	Stainless steel
Acabamento	Satin
Cor da serigrafia	Serigrafia em preto
Logotipo	Logotipo serigrafado




Controls



Control setting	Electronic buttons	Display	1 a LED
Led color	White		

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	No
Other functions	No
Time-setting options	No
Other options	No

Technical Features



Hood without motor	No	No. of filters	3
Remote motor	No	Anti-grease filters	Aluminium
No. of lights	2	Charcoal filters included	Yes
Light type	LED	Filter replacement indicator	Yes
Light Power	2 W	Vent outlet	150 mm
Dimmer mode	No	Minimum distance from GAS hob	650 mm
Escala de temperatura de cor clara (°K)	3500 °K		

Free outlet maximum capacity	650 m ³ /h	Minimum distance from ELECTRIC hob	500 mm
Motor power	250 W	Non return valve	Yes

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	245	46
Speed 2	375	56
Speed 3	500	64
Intensive speed	600	68

Accessories Included

Remote control	No	Tube reduction	No
Sliding door	No		


Performance / Energy Label



Consumo anual de energía (CAE exaustor)	75 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Energy efficiency class (EEC)	B	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dBA
Fluid Dynamic Efficiency (FDE)	21.1	Power consumption in stand-by mode (Ps)	0.49 W
Fluid Dynamic Efficiency class (FDEC)	C	Time increase factor (F)	1.2
Lighting Efficiency (LE)	76.1 lux/W	Energy Efficiency Index	69.6
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	370 m ³ /h
Grease Filtering Efficiency (GFE)	75.1 %	Measured air pressure at best efficiency point (Pbep)	335 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	163 W
Air flow at minumum speed (Qmin)	245 m ³ /h	Nominal Power consumption of the light system (WL)	5 W
Air flow at maximum speed (Qmax)	500 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	381 lux
Air flow at boost speed (Qboost)	600 m ³ /h	Sound power level at highest setting (Lwa)	64 dBA
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	46 dBA		

Electrical Connection

Plug	No	Frequency (Hz)	50-60 Hz
Electrical connection rating	255 W	Comprimento do cabo de alimentação	1500 mm
Voltage	220-240 V		

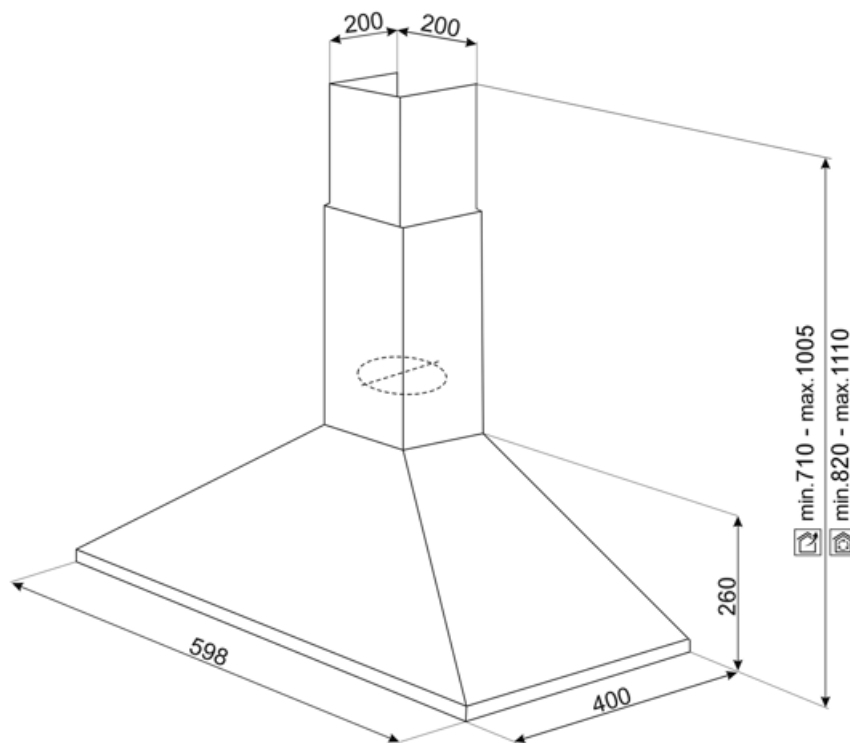

Compatible Accessories



KITFC500

Filtros de carvão redondos (kit 2 peças)

Symbols glossary



Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



Filtros de carvão: Extrair através de filtros de carvão ou diretamente para o exterior diminui consideravelmente os fortes odores de cozimento.



Display LED: para mostrar os programas, funções e opções selecionadas e o tempo até ao final do ciclo.



Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.



Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.



Configuração intensiva/turbo: quando a extração extra rápida é necessária.

