

KCH92X


Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709310271
Hood width	90 cm



Aesthetics

Aesthetic	Universale	Serigraphy colour	Black
Colour	Stainless steel	Logo	Silk screen
Finishing	Satin		

Controls

			
Control setting	Electronic buttons	Display	1 a LED
Led color	White		

Programme / Functions

No. of speeds	3
Intensive speed	

Technical Features

					
No. of lights	2	Anti-grease filters	Aluminium		
Light type	LED	Charcoal filters included	Yes		
Light Power	2 W	Filter replacement indicator	Yes		
Light color temperature scale (°K)	3500 °K	Vent outlet	150 mm		

Free outlet maximum capacity	650 m³/h	Minimum distance from GAS hob	650 mm
Motor power	250 W	Minimum distance from ELECTRIC hob	500 mm
No. of filters	3	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	245	46
Speed 2	375	56
Speed 3	500	64
Intensive speed	600	68

Performance / Energy Label

B

Annual Efficiency Consumption (AEChood)	75 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	64 dB(A)
Energy efficiency class (EEC)	B	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dB(A)
Fluid Dynamic Efficiency (FDE)	21,1	Power consumption in stand-by mode (Ps)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	C	Time increase factor (F)	1,2
Lighting Efficiency (LE)	76,1 lux/W	Energy Efficiency Index	69,6
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	370 m³/h
Grease Filtering Efficiency (GFE)	75,1 %	Measured air pressure at best efficiency point (Pbep)	335 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	163 W
Air flow at minumum speed (Qmin)	245 m³/h	Nominal Power consumption of the light system (WL)	5 W
Air flow at maximum speed (Qmax)	500 m³/h	Average illumination of the light on the cooking surface (Emiddle)	381 lux
Air flow at boost speed (Qboost)	600 m³/h	Sound power level at highest setting (Lwa)	64 dB(A)
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	46 dB(A)		

Electrical Connection


Electrical connection rating	255 W	Frequency (Hz)	50-60 Hz
------------------------------	-------	----------------	----------

Voltage

220-240 V

Power supply cable
length

1500 mm

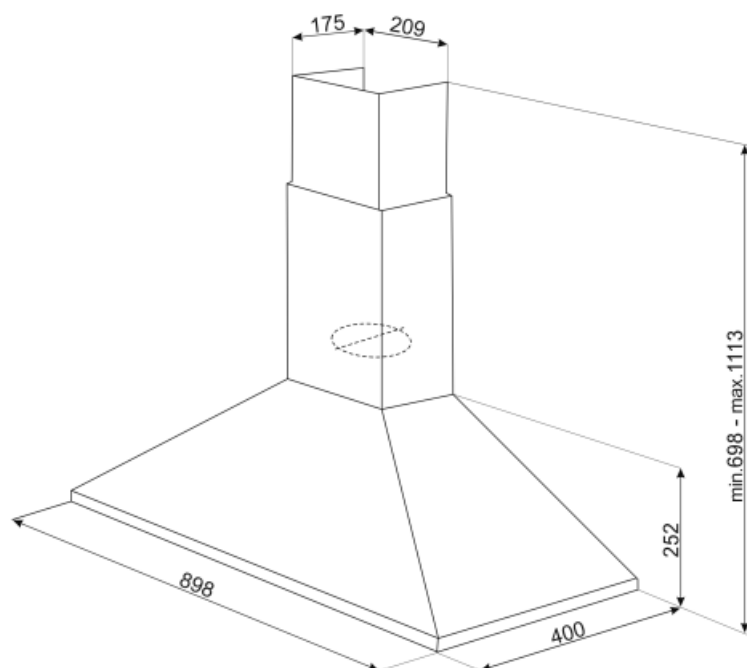

Not included accessories



KITFC500

Round Charcoal filters (kit 2 pieces)

Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.



B: Product energy rating, measured from A+++ to D / G depending on the product family.



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.