KCH92X

Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709310271
Hood width	90 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Serigraphy colour	Black
Logo	Silk screen



Controls

Control setting	Electronic buttons	**Display**	1 a LED
Led color	White		

Program / Functions

No. of speeds	3
Intensive speed	

Technical Features

No. of lights	2	**Anti-grease filters**	Aluminium
Light type	LED	**Filter replacement indicator**	Yes
Light Power	2 W	**Vent outlet**	150 mm
Light color temperature (K)	3500 K	**Minimum distance from GAS hob**	650 mm
Free outlet maximum capacity	650 m³/h	**Minimum distance from ELECTRIC hob**	500 mm
Motor power	250 W	**Non return valve**	Yes
No. of filters	3		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	245	46

Speed 2	375	56
Speed 3	500	64
Intensive speed	600	68

Accessories included



Charcoal filters included Yes

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	75 kWh/a
Energy efficicency class (EEC)	B
Fluid Dynamic Efficiency (FDE)	21,1
Fluid Dynamic Efficiency class (FDEC)	C
Lighting Efficiency (LE)	76,1 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	75,1 %
Grease Filtering Efficiency Class (GFEC)	C
Air flow at minumum speed (Qmin)	245 m³/h
Air flow at maximum speed (Qmax)	500 m³/h
Air flow at boost speed (Qboost)	600 m³/h


Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	46 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dBA
Time increase factor (F)	1,2
Energy Efficiency Index	69,6
Measured air flow rate at best efficiency point (Qbep)	370 m³/h
Measured air pressure at best efficiency point (Pbep)	335 Pa
Measured electric power input at best efficiency point (Wbep)	163 W
Nominal Power consumption of the light system (WL)	5 W
Average illumination of the light on the cooking surface (Emiddle)	381 lux
Sound power level at highest setting (Lwa)	64 dBA

Electrical Connection

Electrical connection rating	255 W

Power supply cable length	1500 mm
Plug	Not present

Voltage	220-240 V
Frequency (Hz)	50-60 Hz

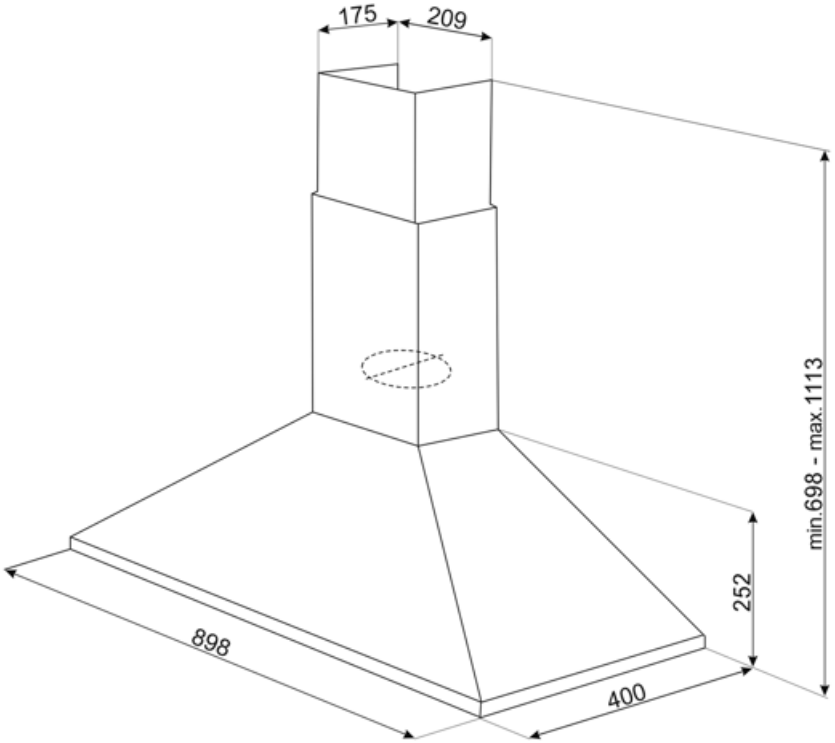

Compatible Accessories



KITFC500

Round Charcoal filters (kit 2 pieces)

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.

