

# KCI19AOE

Product family	Hood
Hood Type	Decorative island hood
Design	Rounded
Extraction	Extraction
Material	Heat-moulded
EAN code	8017709212506
Hood width	90 cm
Aesthetic	Cortina
Colour	Anthracite
Components finishing	Antique brass
Logo	Applied



## Controls

Control setting	Control knobs	Control knobs	Cortina
No. of controls	2	Controls colour	Anthracite

## Program / Functions

No. of speeds	3
Intensive speed	

## Technical Features



No. of lights	4	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light Power	1 W	Vent outlet	150 mm
Light color temperature scale (K)	3000 K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	321	47
Speed 2	385	59

Speed 3	549	61
Intensive speed	796	70

## Accessories included

Tube reduction	Yes
----------------	-----

## Performance / Energy Label

		
<b>Annual Efficiency Consumption (AEChood)</b>	59 kWh/a	<b>Airbourne acoustical A- weighted sound Power</b>
<b>Energy efficicency class (EEC)</b>	A	<b>Emission at minimum speed (SPEmin)</b>
<b>Fluid Dynamic Efficiency (FDE)</b>	25,9	<b>Airborne acoustical A- weighted sound Power</b>
<b>Fluid Dynamic Efficiency class (FDEC)</b>	A	<b>Emission at maximum speed (SPEmax)</b>
<b>Lighting Efficiency (LE)</b>	68,6 lux/W	<b>Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)</b>
<b>Lighting Efficiency Class (LEC)</b>	A	<b>Time increase factor (F)</b>
<b>Grease Filtering Efficiency (GFE)</b>	78 %	0,9
<b>Grease Filtering Efficiency Class (GFEC)</b>	C	<b>Energy Efficiency Index</b>
<b>Air flow at minumum speed (Qmin)</b>	321 m <sup>3</sup> /h	426 m <sup>3</sup> /h
<b>Air flow at maximum speed (Qmax)</b>	549 m <sup>3</sup> /h	<b>Measured air pressure at best efficiency point (Pbep)</b>
<b>Air flow at boost speed (Qboost)</b>	796 m <sup>3</sup> /h	453 Pa
		<b>Measured electric power input at best efficiency point (Wbep)</b>
		170 W
		<b>Nominal Power consumption of the light system (WL)</b>
		4 W
		<b>Average illumination of the light on the cooking surface (Emiddle)</b>
		302 lux
		<b>Sound power level at highest setting (Lwa)</b>
		61 dBA

## Electrical Connection

<b>Electrical connection rating</b>	279 W	<b>Power supply cable length</b>	1000 mm
<b>Voltage</b>	220-240 V	<b>Plug</b>	Not present
<b>Frequency (Hz)</b>	50-60 Hz		


## Also available

Alternative colours  
available

Cream

Available colours

KCI19POE

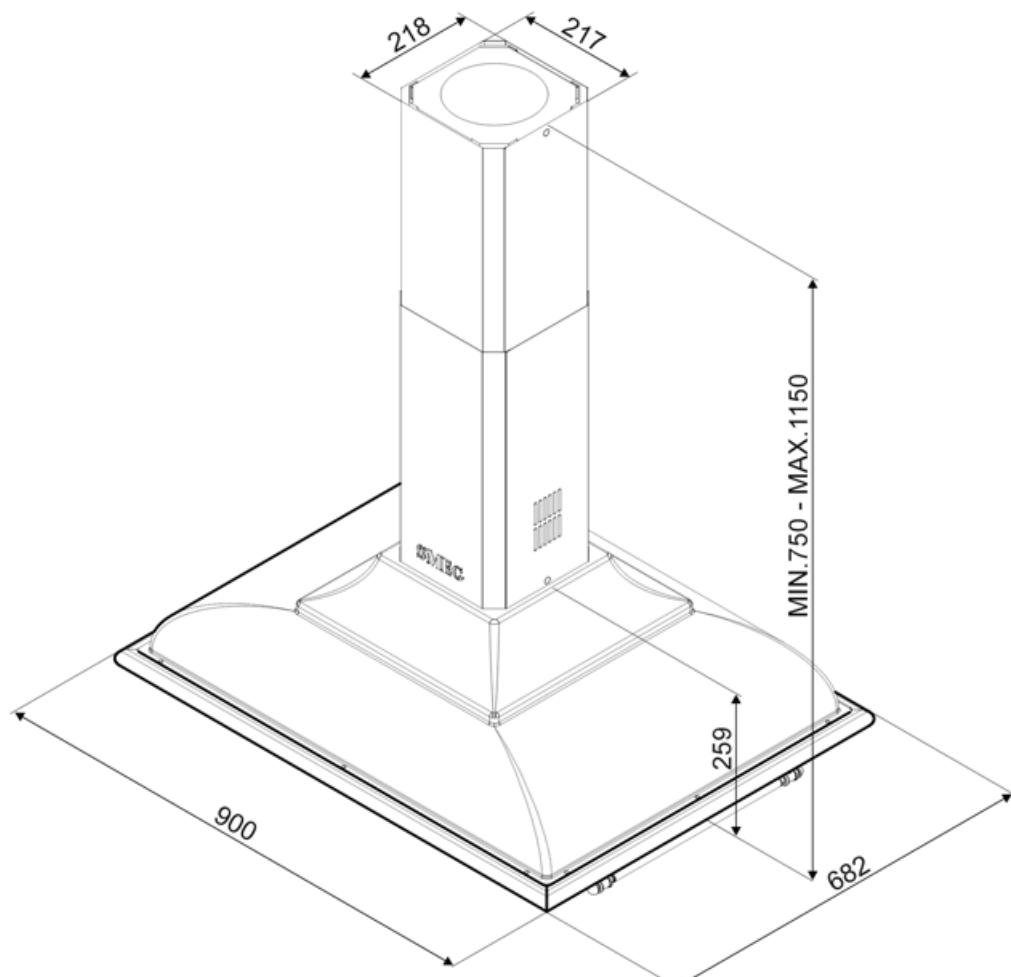



---

## Compatible Accessories

---

**FLT6**

Round Charcoal filters (kit 2 pieces)



**KITLOGOAS**

**SMEG**

KIT LOGO ANTIQUE SILVER  
FINISHING

**KITLOGOCR**

**SMEC**

KIT LOGO CHROME FINISHING

## Symbols glossary

 A <sup>b</sup>	Energy efficiency class A		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Intensive/turbo setting: when extra fast extraction is required.