

KCI19AOE

Product family	Hood
Hood Type	Decorative island hood
Design	Rounded
Extraction	Extraction
Material	Heat-moulded
EAN code	8017709212506
Aesthetic	Cortina
Colour	Anthracite
Components finishing	Antique brass
Logo	Applied



Controls

Control setting	Control knobs	Control knobs	Cortina
No. of controls	2	Controls colour	Anthracite

Program / Functions

No. of speeds	3
Intensive speed	

Technical Features

			
No. of lights	4	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light Power	1 W	Vent outlet	150 mm
Light color temperature scale (°K)	3000 °K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	321	47
Speed 2	385	59

Speed 3	549	61
Intensive speed	796	70

Accessories included

Tube reduction Yes

Performance / Energy Label



Annual Efficiency Consumption (AEChood) 59 kWh/a
Energy efficiency class (EEC) A
Fluid Dynamic Efficiency (FDE) 25.9
Fluid Dynamic Efficiency class (FDEC) A
Lighting Efficiency (LE) 68.6 lux/W
Lighting Efficiency Class (LEC) A
Grease Filtering Efficiency (GFE) 78 %
Grease Filtering Efficiency Class (GFEC) C
Air flow at minumum speed (Qmin) 321 m³/h
Air flow at maximum speed (Qmax) 549 m³/h
Air flow at boost speed (Qboost) 796 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 47 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 61 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 70 dBA
Time increase factor (F) 0.9
Energy Efficiency Index 53.1
Measured air flow rate at best efficiency point (Qbep) 426 m³/h
Measured air pressure at best efficiency point (Pbep) 453 Pa
Measured electric power input at best efficiency point (Wbep) 170 W
Nominal Power consumption of the light system (WL) 4 W
Average illumination of the light on the cooking surface (Emiddle) 302 lux
Sound power level at highest setting (Lwa) 61 dBA

Electrical Connection

Plug Not present
Electrical connection rating 279 W
Voltage 220-240 V

Frequency (Hz) 50-60 Hz
Power supply cable length 1000 mm


Also available

Alternative colours
available

Cream

Available colours

KCI19POE

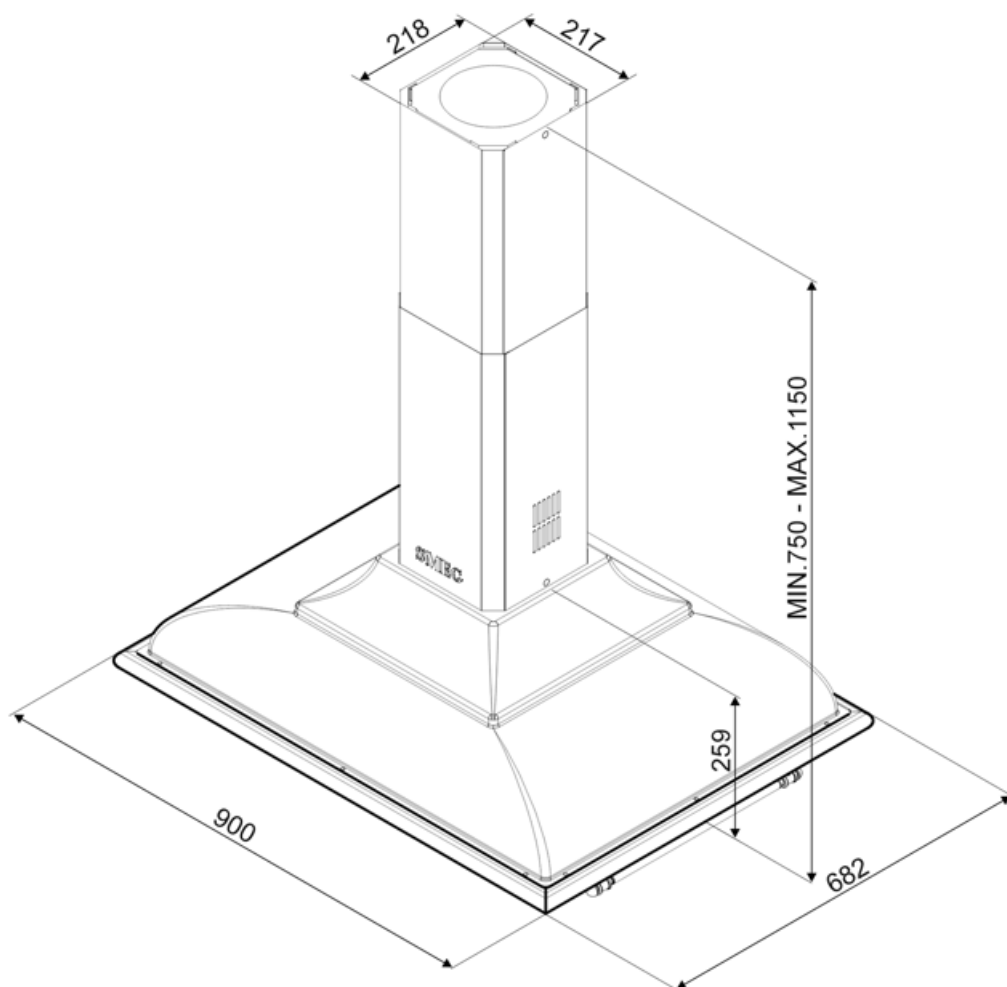

Compatible Accessories

FLT6
Round Charcoal filters (kit 2 pieces)



KITLOGOCR
KIT LOGO CHROME FINISHING



KITLOGOAS
KIT LOGO ANTIQUE SILVER
FINISHING



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.