

## KCI19POE

### Product family

Hood

### Hood Type

Decorative island hood

### Design

Rounded

### Extraction

Extraction

### Material

Heat-moulded

### EAN code

8017709212490

### Hood width

90 cm

### Aesthetic

Cortina

### Colour

Cream

### Components finishing

Antique brass

### Logo

Applied



## Controls

### Control setting

Control knobs

### Control knobs

Cortina

### No. of controls

2

### Controls colour

Cream

## Program / Functions

### No. of speeds

3

### Intensive speed



## Technical Features



### No. of lights

4

### No. of filters

3

### Light type

LED

### Anti-grease filters

Aluminium

### Light Power

1 W

### Vent outlet

150 mm

### Light color temperature scale (K)

3000 K

### Minimum distance from GAS hob

750 mm

### Free outlet maximum capacity

820 m<sup>3</sup>/h

### Minimum distance from ELECTRIC hob

650 mm

### Motor power

275 W

### Non return valve

Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	321	47
Speed 2	385	59

Speed 3	549	61
Intensive speed	796	70

## Accessories included

Tube reduction	Yes
----------------	-----

## Performance / Energy Label

		
<b>Annual Efficiency Consumption (AEChood)</b>	59 kWh/a	<b>Airbourne acoustical A- weighted sound Power</b>
<b>Energy efficicency class (EEC)</b>	A	<b>Emission at minimum speed (SPEmin)</b>
<b>Fluid Dynamic Efficiency (FDE)</b>	25.9	<b>Airborne acoustical A- weighted sound Power</b>
<b>Fluid Dynamic Efficiency class (FDEC)</b>	A	<b>Emission at maximum speed (SPEmax)</b>
<b>Lighting Efficiency (LE)</b>	68.6 lux/W	<b>Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)</b>
<b>Lighting Efficiency Class (LEC)</b>	A	<b>Time increase factor (F)</b>
<b>Grease Filtering Efficiency (GFE)</b>	78 %	0.9
<b>Grease Filtering Efficiency Class (GFEC)</b>	C	<b>Energy Efficiency Index</b>
<b>Air flow at minumum speed (Qmin)</b>	321 m³/h	426 m³/h
<b>Air flow at maximum speed (Qmax)</b>	549 m³/h	<b>Measured air pressure at best efficiency point (Pbep)</b>
<b>Air flow at boost speed (Qboost)</b>	796 m³/h	453 Pa
		<b>Measured electric power input at best efficiency point (Wbep)</b>
		170 W
		<b>Nominal Power consumption of the light system (WL)</b>
		4 W
		<b>Average illumination of the light on the cooking surface (Emiddle)</b>
		302 lux
		<b>Sound power level at highest setting (Lwa)</b>
		61 dBA

## Electrical Connection

<b>Electrical connection rating</b>	279 W	<b>Power supply cable length</b>	1000 mm
<b>Voltage</b>	220-240 V	<b>Plug</b>	Not present
<b>Frequency (Hz)</b>	50-60 Hz		


## Also available

Alternative colours  
available

Anthracite

Available colours

KCI19AOE

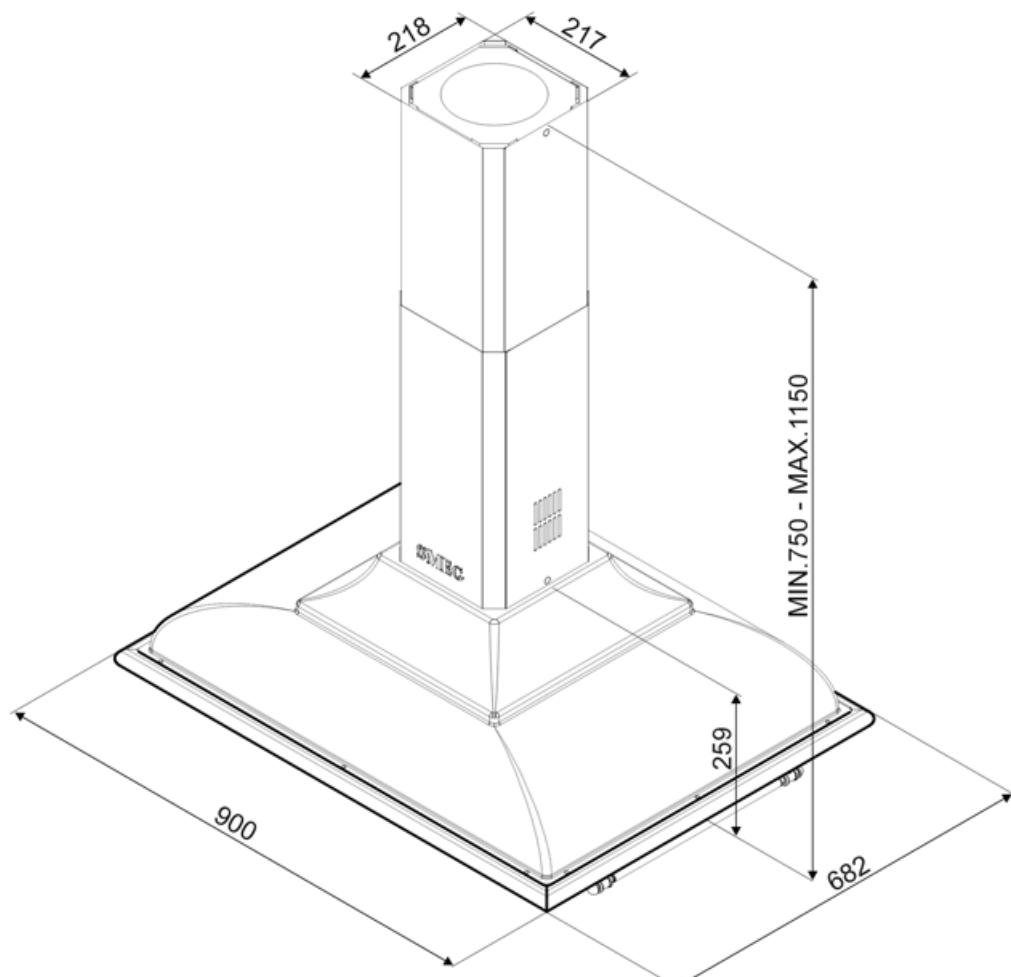



---

## Compatible Accessories

---

**FLT6**

Round Charcoal filters (kit 2 pieces)



**KITLOGOAS**

**SMEG**

KIT LOGO ANTIQUE SILVER  
FINISHING

**KITLOGOCR**

**SMEC**

KIT LOGO CHROME FINISHING

## Symbols glossary



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**Energy efficiency class A**



**Intensive/turbo setting:** when extra fast extraction is required.