


KCU104X

Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Extraction
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709369248
Hood width	90 cm
Aesthetic	Portofino
Colour	Stainless steel
Finishing	Polished/Satin
Components finishing	Stainless steel
Logo	Applied



Controls

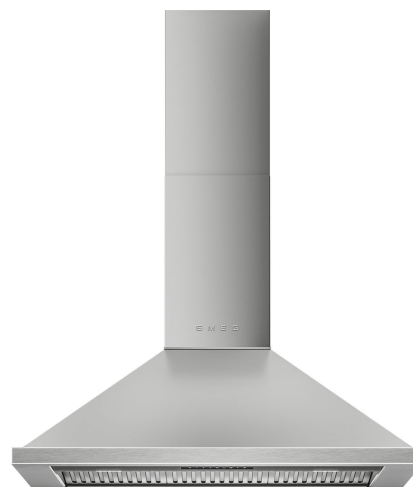

Control setting

Touch control

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Auto-vent 2.0	
V-Condense System	

Technical Features



No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Stainless steel
Light Power	2 W	Vent outlet	150 mm
Dimmer mode	Yes	Minimum distance from GAS hob	750 mm
Light color temperature (K)	4000 K	Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	778 m³/h	Non return valve	Yes
Motor power	275 W		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	235	42
Speed 2	399	54
Speed 3	572	63
Intensive speed	742	69

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	26 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	42 dBA
Energy efficiency class (EEC)	A++	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Fluid Dynamic Efficiency (FDE)	38,5	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	69 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,6
Lighting Efficiency (LE)	37,0 lux/W	Energy Efficiency Index	34,9
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	379 m³/h
Grease Filtering Efficiency (GFE)	80,6 %	Measured air pressure at best efficiency point (Pbep)	384 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	105 W
Air flow at minumum speed (Qmin)	240 m³/h	Nominal Power consumption of the light system (WL)	4,6 W
Air flow at maximum speed (Qmax)	593 m³/h	Average illumination of the light on the cooking surface (Emiddle)	169 lux
Air flow at boost speed (Qboost)	778 m³/h	Sound power level at highest setting (Lwa)	69 dBA

Electrical Connection

Voltage	220-240 V	Power supply cable length	1000 mm
Frequency (Hz)	50-60 Hz	Plug	Not present

Also available



Alternative colours available	White, Stainless steel, Anthracite, Yellow, Green, Red, Orange	Available colours	KPF9WH-KPF9X-KPF9AN-KPF9YW-KP9OG-KPF9RD-KPF9OR
-------------------------------	--	-------------------	--

Compatible Accessories



KITFCGT94

Regenerable charcoal filters, Kit 3 pieces

Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	A++: Energy efficiency class A++ helps to save up to 20% energy compared to class A. Maximum performance with minimum consumption is guaranteed.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.		Intensive/turbo setting: when extra fast extraction is required.
	Connection between hob and hood		Dimmering Lights
	V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.		