

# KCU94X

<b>Product family</b>	Hood
<b>Hood Type</b>	Decorative wall hood
<b>Design</b>	Chimney
<b>Extraction</b>	Extraction
<b>Material</b>	Stainless steel
<b>Type of steel</b>	Brushed
<b>EAN code</b>	8017709367831
<b>Hood width</b>	90 cm
<b>Aesthetic</b>	Portofino
<b>Colour</b>	Stainless steel
<b>Finishing</b>	Polished/Satin
<b>Components finishing</b>	Stainless steel
<b>Logo</b>	Applied



## Controls



Control setting                      Touch control

## Program / Functions

<b>No. of speeds</b>	3
<b>Intensive speed</b>	
<b>Auto-vent 2.0</b>	
<b>Auto-vent 2.0</b>	

## Technical Features



<b>No. of lights</b>	2	<b>No. of filters</b>	3
<b>Light type</b>	LED	<b>Anti-grease filters</b>	Stainless steel
<b>Light Power</b>	2 W	<b>Vent outlet</b>	150 mm
<b>Dimmer mode</b>	Yes	<b>Minimum distance from GAS hob</b>	750 mm
<b>Light color temperature scale (K)</b>	4000 K	<b>Minimum distance from ELECTRIC hob</b>	650 mm
<b>Free outlet maximum capacity</b>	815 m <sup>3</sup> /h	<b>Non return valve</b>	Yes
<b>Motor power</b>	275 W		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	288	48
Speed 2	421	63
Speed 3	630	67
Intensive speed	781	72

## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	40 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dBA
Energy efficiency class (EEC)	A+	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Fluid Dynamic Efficiency (FDE)	36,2	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	1,00
Lighting Efficiency (LE)	78,2 lux/W	Energy Efficiency Index	40,3
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	413 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	78,5 %	Measured air pressure at best efficiency point (Pbep)	476 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	151 W
Air flow at minumum speed (Qmin)	288 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Qmax)	630 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	172 lux
Air flow at boost speed (Qboost)	781 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	67 dBA

## Electrical Connection

Electrical connection rating	277 W	Power supply cable length	1000 mm
Voltage	220-240 V	Plug	No
Frequency (Hz)	50-60 Hz		


## Also available

Alternative colours available

White, Stainless steel, Anthracite, Yellow, Green, Red, Orange

Available colours

KPF9WH-KPF9X-KPF9AN-KPF9YW-KP9OG-KPF9RD-KPF9OR

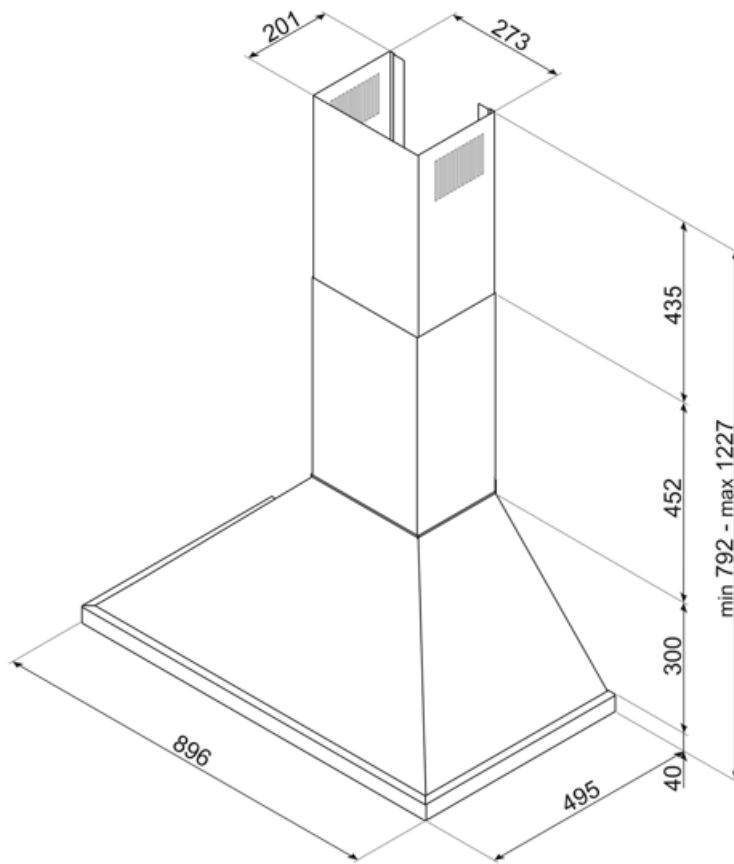

---

## Compatible Accessories

---

### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Alternative products

---



**KCU94AN**

Colour: Anthracite



**KCU94BL**

Colour: Black



**KCU94SBM**

Colour: Storm Blue



**KCU94WH**

Colour: White



**KCU94EGM**

Colour: Emerald Green



**KCU94ACM**

Colour: Amber Clay











**KCU94MLM**

Colour: Moonlight

---

## Symbols glossary

---

- |  |  |   |  |
|--|--|---|--|
|  | A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.                                    |
|  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.                                  |  | Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.                                  |
|  | Intensive/turbo setting: when extra fast extraction is required.   |  | Connection between hob and hood  |
|  | Dimming Lights   |  | V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use. |