

KD120HXE

Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	Chimney
Extraction	Ducted out or re-circulation possible
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709257651
Hood width	120 cm



Aesthetics

Aesthetics	Classic	Finishing	Brushed
Colour	Stainless steel	Logo	Embossed



Controls

Control setting	Control knobs	Control knobs	Classic
No. of controls	2	Controls colour	Steel effect

Programs / Functions

No. of speeds	3
Intensive speed	

Technical Features

			
No. of lights	4	No. of filters	4
Light type	LED	Anti-grease filters	Stainless steel
Light power	4 W	Vent outlet	150 mm
Light colour	4000 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	820 m ³ /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	287	49
Speed 2	389	58
Speed 3	606	67
Intensive speed	777	73

Performance / Energy Label


Annual Efficiency Consumption (AEChood)	42 KWh/year	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dB(A)
Energy efficiency class (EEC)	A+	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	73 dB(A)
Fluid Dynamic Efficiency (FDE)	36.3	Power Consumption in Off mode (Po)	0.1 W
Fluid Dynamic Efficiency class (FDEC)	A	Power consumption in stand-by mode (Ps)	0.1 W
Lighting Efficiency (LE)	74.8 lux/W	Time increase factor (F)	0.7
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	400 m³/h
Grease Filtering Efficiency (GFE)	74.9 %	Measured air pressure at best efficiency point (Qbep)	490 Pa
Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	150 W
Air flow at mininum speed (Qmin)	287 m³/h	Normal Power of the light system (WI)	5 W
Maximum extraction rate	606 m³/h	Average illumination of the light on the cooking surface (Emiddle)	329 lux
Intensive extraction rate	777 m³/h	Sound power level at highest setting (Lwa)	67 dB(A)
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	49 dB(A)		

Electrical Connection

Nominal power	179 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1000 mm

Optional accessories

Charcoal filter	FLT6
-----------------	------

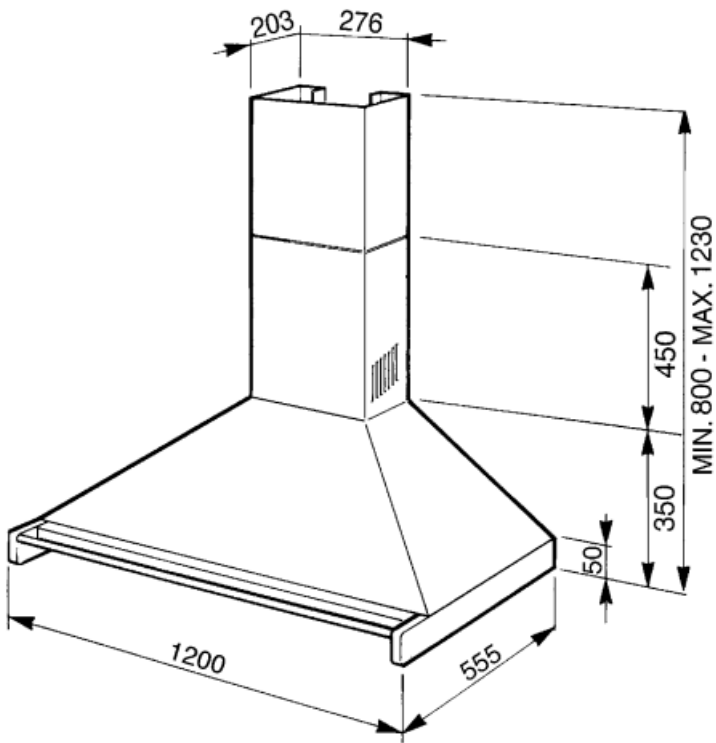

Not included accessories



FLT6




Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary

- A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.
-  Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
-  Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
-  Intensive/turbo setting: when extra fast extraction is required.