

KD120HXE

Product family Hood

Hood Type Decorative wall hood

Design Chimney
Extraction Extraction
Material Stainless steel
Type of steel Brushed

EAN code 8017709257651

Hood width 120 cm
Aesthetic Classica
Colour Stainless steel

Finishing Satin
Logo Embossed



Controls

Control settingControl knobsControl knobsClassicNo. of controls2Controls colourSteel effect

Program / Functions

No. of speeds Intensive speed 3 BOOST

Technical Features





No. of lights 4 No. of filters 4

Light typeLEDAnti-grease filtersStainless steelLight Power4 WVent outlet150 mmLight color temperature4000 KMinimum distance from650 mm

scale (K) GAS hob

Free outlet maximum 820 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	287	49
Speed 2	389	58



Speed 3	606	67
Intensive speed	777	73

Performance / Energy Label

Annual Efficiency 42 kWh/a Airbourne acouistical A- 49 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class A+ speed (SPEmin) (EEC) Airborne acoustical A-67 dBA Fluid Dynamic Efficiency 36.3 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 73 dBA Lighting Efficiency (LE) 74.8 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 74.9 % Time increase factor (F) Efficiency (GFE) Measured air flow rate 400 m³/h **Grease Filtering** at best efficiency point Efficiency Class (GFEC) (Qbep) Air flow at minumum 287 m³/h Measured air pressure 490 Pa speed (Qmin) at best efficiency point Air flow at maximum 606 m³/h (Pbep) speed (Qmax) Measured electric 150 W Air flow at boost speed 777 m³/h power input at best (Qboost) efficiency point (Wbep) **Nominal Power** 5 W consumption of the light system (WL) Average illumination of 329 lux the light on the cooking surface (Emiddle)

Electrical Connection

Electrical connection Power supply cable 1000 mm 179 W

rating

length 220-240 V Voltage Plug Not present Frequency (Hz) 50-60 Hz

Optional accessories

Charcoal filter FLT6


SMEG SPA 27/11/2025

Sound power level at

highest setting (Lwa)

67 dBA



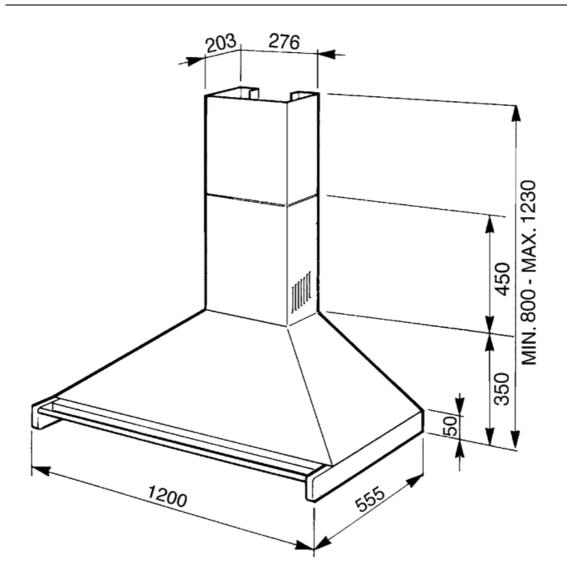



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.