

KD150HXE

Product family

Hood

Hood Type

Chimney Cooker Hoods

Design

Chimney

Extraction

Ducted out or re-circulation possible

Material

Stainless steel

Type of steel

Brushed

EAN code

8017709276898

Hood width

150 cm

Aesthetics

Classic

Colour

Stainless steel

Finishing

Brushed

Logo

Applied



Controls

Control setting

Control knobs

Control knobs

Classic

No. of controls

2

Controls colour

Steel effect

Program / Functions

No. of speeds

3

Intensive speed



Technical Features



No. of lights

4

No. of filters

5

Light type

LED

Anti-grease filters

Stainless steel

Light power

1 W

Vent outlet

150 mm

Light colour

4000 K

Minimum distance from GAS hob

750 mm

temperature scale (K)

830 m³/h

Minimum distance from ELECTRIC hob

650 mm

Free outlet maximum capacity

275 W

Non return valve

Yes

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	292	49
Speed 2	415	58


Speed 3	626	67
Intensive speed	787	72

Performance / Energy Label

	
Annual Efficiency Consumption (AEChood)	41 kWh/year
Energy efficiency class (EEC)	A+
Fluid Dynamic Efficiency (FDE)	36
Fluid Dynamic Efficiency class (FDEC)	A
Lighting Efficiency (LE)	59,8 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	71,3 %
Grease Filtering Efficiency Class (GFEC)	D
Air flow at minimum speed (Qmin)	292 m ³ /h
Maximum extraction rate	626 m ³ /h
Intensive extraction rate	787 m ³ /h
Airbourne acoustical weighted sound Power Emission at minimum speed (SPEmin)	49 dBA
Airborne acoustical weighted sound Power Emission at maximum speed (SPEmax)	68 dBA
Airbourne acoustical weighted sound power emission at boost speed (SPEboost)	72 dBA
Time increase factor (F)	0,7
Energy Efficiency Index per first cavity	41,3
Measured air flow rate at best efficiency point (Qbep)	382 m ³ /h
Measured air pressure at best efficiency point (Qbep)	496 Pa
Measured electric power input at best efficiency point (Wbep)	146 W
Normal Power of the light system (WI)	4 W
Average illumination of the light on the cooking surface (Emiddle)	263 lux
Sound power level at highest setting (Lwa)	68 dBA

Electrical Connection

Nominal power	279 W	Power supply cable length	1000 mm
Voltage	220-240 V	Plug	No
Frequency (Hz)	50-60 Hz		

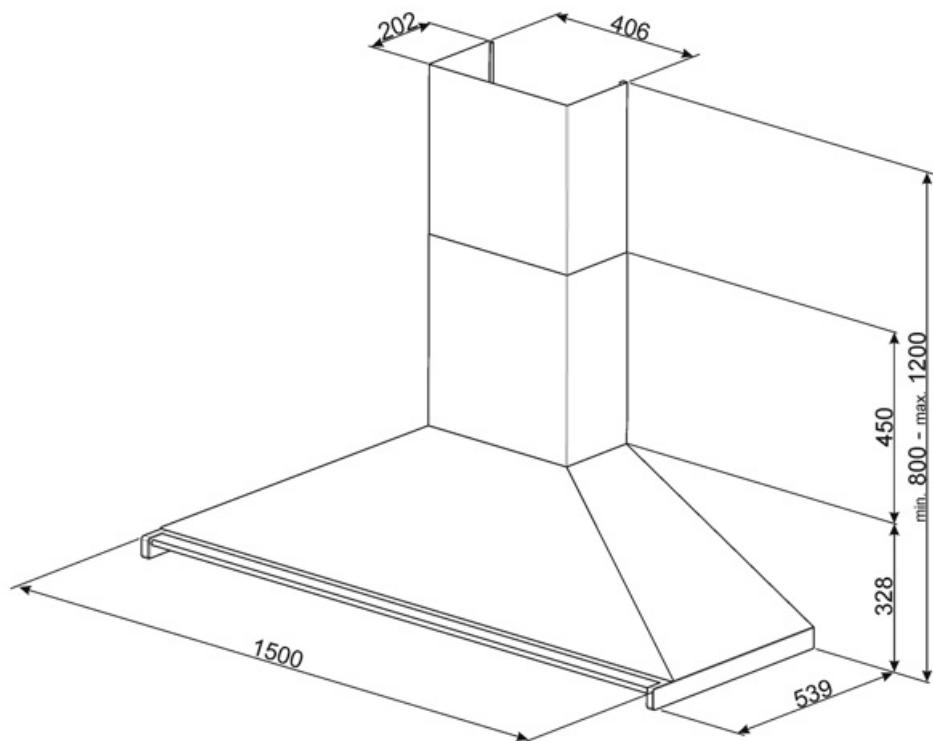

Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.