

KD150HXE

Product family Hood

Hood Type Chimney Cooker Hoods

Design Chimney

Extraction Ducted out or re-circulation possible

Stainless steel Material

Type of steel Brushed

8017709276898 **EAN** code

Hood width 150 cm **Aesthetics** Classic

Colour Stainless steel **Finishing** Brushed Logo **Applied**



750 mm

Yes

Controls

Control knobs Control knobs Classic Control setting No. of controls Controls colour Steel effect 2

Program / Functions

No. of speeds Intensive speed

Technical Features

Free outlet maximum





capacity

No. of lights No. of filters 5 4

Light type **LED** Anti-grease filters Stainless steel 150 mm Light power 1 W Vent outlet

Light colour 4000 K Minimum distance from temperature scale (K)

GAS hob

Minimum distance from 830 m³/h 650 mm

ELECTRIC hob

275 W Motor power Non return valve

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	292	49
Speed 2	415	58

SMEG SPA 23/11/2025



Speed 3	626	67
Intensive speed	787	72

Performance / Energy Label

/	0.0	A
<		Ť.

Annual Efficiency 41 kWh/year Airbourne acouistical A- 49 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficiency class (A+ speed (SPEmin) Airborne acoustical A-68 dBA Fluid Dynamic Efficiency 36 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 72 dBA Lighting Efficiency (LE) 59.8 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 71.3 % Time increase factor (F) 0.7 Efficiency (GFE) **Energy Efficiency Index** 41.3 **Grease Filtering** per first cavity Efficiency Class (GFEC) Measured air flow rate 382 m³/h Air flow at minumum 292 m³/h at best efficiency point speed (Qmin) (Qbep) Maximum extraction 626 m³/h Measured air pressure 496 Pa at best efficiency point Intensive extraction rate 787 m³/h (Qbep) Measured electric 146 W power input at best efficiency point (Wbep) Normal Power of the 4 W light system (WI) Average illumination of 263 lux the light on the cooking

Electrical Connection

Nominal power	279 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1000 mm


SMEG SPA 23/11/2025

surface (Emiddle) Sound power level at

highest setting (Lwa)

68 dBA



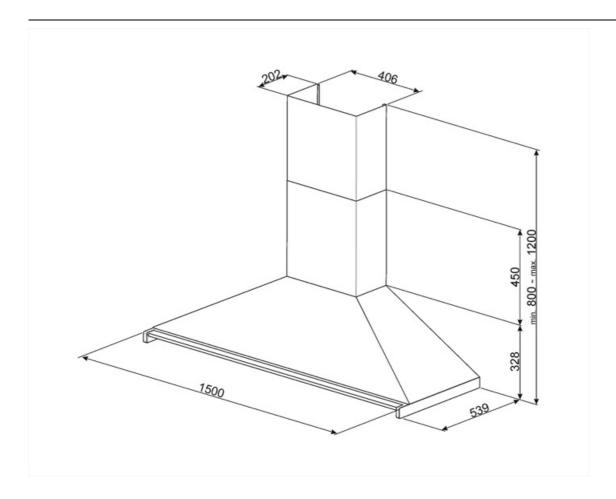

SMEG SPA 23/11/2025



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

SMEG SPA 23/11/2025



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.

SMEG SPA 23/11/2025