

# KD150HXE

Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Extraction
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709276898
Hood width	150 cm



## Aesthetics

Aesthetic	Classica	Finishing	Satin
Colour	Stainless steel	Logo	Applied



## Controls

Control setting	Control knobs	Control knobs	Classic
No. of controls	2	Controls colour	Steel effect

## Programs / Functions

No. of speeds	3
Intensive speed	

## Technical Features

			
No. of lights	4	No. of filters	5
Light type	LED	Anti-grease filters	Stainless steel
Light Power	1 W	Vent outlet	150 mm
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	830 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dB(A)]
Speed 1	292	49
Speed 2	415	58
Speed 3	626	67
Intensive speed	787	72


## Performance / Energy Label

A\*

Annual Efficiency Consumption (AEChood)	41 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	49 dB(A)
Energy efficiency class (EEC)	A+	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	68 dB(A)
Fluid Dynamic Efficiency (FDE)	36	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dB(A)
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.7
Lighting Efficiency (LE)	59.8 lux/W	Energy Efficiency Index	41.3
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	382 m³/h
Grease Filtering Efficiency (GFE)	71.3 %	Measured air pressure at best efficiency point (Pbep)	496 Pa
Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	146 W
Air flow at minumum speed (Qmin)	292 m³/h	Nominal Power consumption of the light system (WL)	4 W
Air flow at maximum speed (Qmax)	626 m³/h	Average illumination of the light on the cooking surface (Emiddle)	263 lux
Air flow at boost speed (Qboost)	787 m³/h	Sound power level at highest setting (Lwa)	68 dB(A)

## Electrical Connection

Electrical connection rating	279 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1000 mm

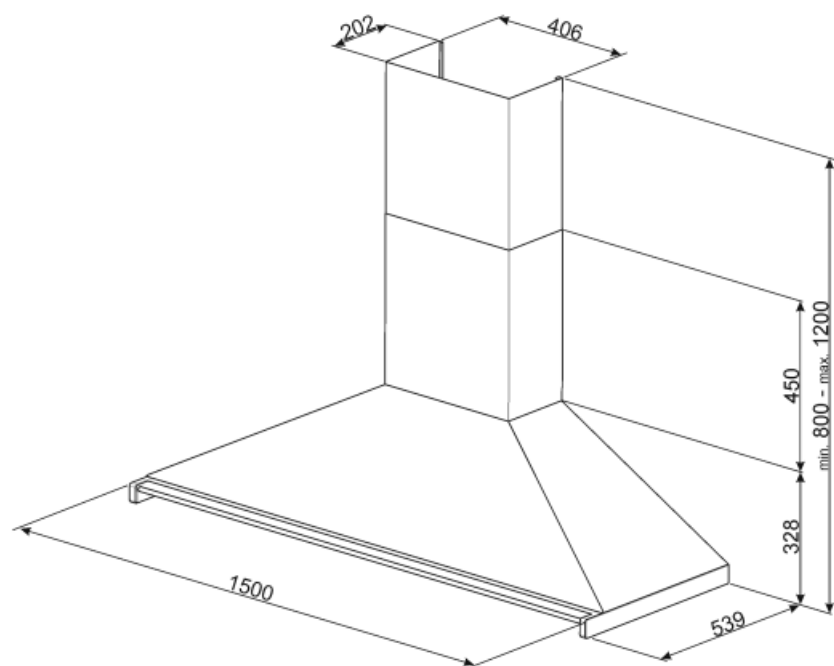

---

## Not included accessories

---



### FLT6

Round Charcoal filters (kit 2 pieces)







### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary (TT)

---

	A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Intensive/turbo setting: when extra fast extraction is required.