

KD150HXE

Product family Hood

Hood Type Decorative wall hood

DesignChimneyExtractionExtractionMaterialStainless steelType of steelBrushed

EAN code 8017709276898

Hood width150 cmAestheticClassicaColourStainless steel

Finishing Satin Logo Applied



Controls

Control settingControl knobsControl knobsClassicNo. of controls2Controls colourSteel effect

Program / Functions

No. of speeds Intensive speed





No. of lights 4 No. of filters 5

Light typeLEDAnti-grease filtersStainless steelLight Power1 WVent outlet150 mmLight color temperature4000 KMinimum distance from750 mm

scale (K) GAS hob

Free outlet maximum 830 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	292	49
Speed 2	415	58



Speed 3	626	67
Intensive speed	787	72

Performance / Energy Label

/	0.0	A
<		Ť.

Annual Efficiency 41 kWh/a Airbourne acouistical A- 49 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class A+ speed (SPEmin) (EEC) Airborne acoustical A-68 dBA Fluid Dynamic Efficiency 36 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 72 dBA Lighting Efficiency (LE) 59.8 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 71.3 % Time increase factor (F) 0.7 Efficiency (GFE) **Energy Efficiency Index** 41.3 **Grease Filtering** Measured air flow rate 382 m³/h Efficiency Class (GFEC) at best efficiency point Air flow at minumum 292 m³/h (Qbep) speed (Qmin) Measured air pressure 496 Pa Air flow at maximum 626 m³/h at best efficiency point speed (Qmax) (Pbep) Air flow at boost speed 787 m³/h Measured electric 146 W (Qboost) power input at best efficiency point (Wbep) **Nominal Power** 4 W consumption of the light system (WL) Average illumination of 263 lux the light on the cooking

Electrical Connection

Electrical connection 279 W Power supply cable 1000 mm rating length

Voltage 220-240 V Plug Not present Frequency (Hz) 50-60 Hz


SMEG SPA 27/11/2025

surface (Emiddle) Sound power level at

highest setting (Lwa)

68 dBA



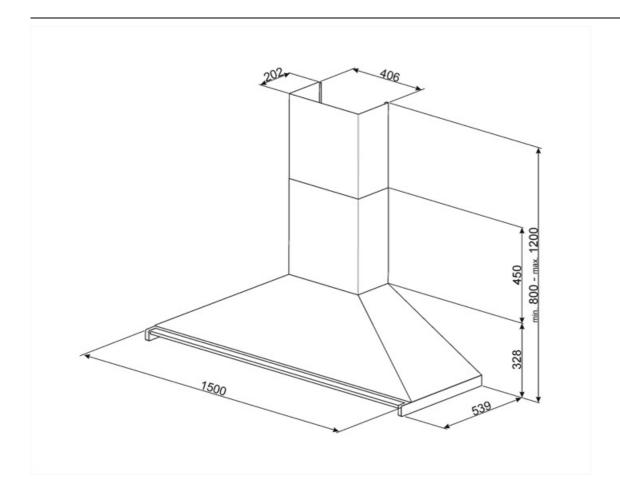



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.