

KD70XE

Product family Hood

Hood Type Decorative wall hood

DesignChimneyExtractionExtractionMaterialStainless steelType of steelBrushed

EAN code 8017709211585

Hood width70 cmAestheticClassicaColourStainless steel

Finishing Satin
Logo Embossed



Controls

Control settingControl knobsControl knobsClassicNo. of controls2Controls colourSteel effect

Program / Functions

No. of speeds Intensive speed



Technical Features





No. of lights 2 No. of filters 2

Light typeLEDAnti-grease filtersStainless steelLight Power2 WVent outlet150 mmLight color temperature4000 KMinimum distance from750 mm

scale (K) GAS hob

Free outlet maximum 820 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	323	50
Speed 2	439	57



Speed 3	542	62
Intensive speed	761	70

Performance / Energy Label

	tr
<	Ť

Annual Efficiency 63 kWh/a Airbourne acouistical A- 50 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class B speed (SPEmin) (EEC) Airborne acoustical A-62 dBA Fluid Dynamic Efficiency 28.5 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 70 dBA Lighting Efficiency (LE) 111.8 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 77.8 % Time increase factor (F) 1.00 Efficiency (GFE) **Energy Efficiency Index** 57.7 **Grease Filtering** Measured air flow rate 394 m³/h Efficiency Class (GFEC) at best efficiency point Air flow at minumum 323 m³/h (Qbep) speed (Qmin) Measured air pressure 436 Pa Air flow at maximum 542 m³/h at best efficiency point speed (Qmax) (Pbep) Air flow at boost speed 761 m³/h Measured electric 168 W (Qboost) power input at best efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 246 lux the light on the cooking surface (Emiddle)

Electrical Connection

Electrical connection 278 W Power supply cable 1500 mm

 rating
 length

 Voltage
 220-240 V
 Plug
 Not present

 Frequency (Hz)
 50-60 Hz
 Not present

Also available

Alternative colours White Available colours KD70WHE available


SMEG SPA 30/11/2025

Sound power level at

highest setting (Lwa)

62 dBA



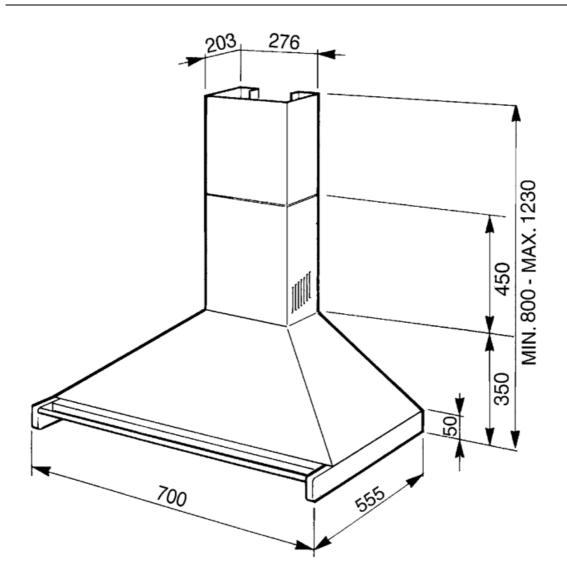



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITCMNKD

Chimney extension dimension 202.8 * 276 * 800



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.

