

## KDC61XE3

**Product family** Hood

**Hood Type** Decorative wall hood

Design Chimney Extraction Extraction Material Stainless steel Type of steel Brushed

**EAN** code 8017709345990

**Aesthetic** Universale Stainless steel Colour

**Finishing** Satin **Embossed** Logo



500 mm

#### **Controls**

Control setting Buttons

### **Program / Functions**

No. of speeds 3

#### **Technical Features**







No. of filters 2 No. of lights 2

LED Aluminium Light type **Anti-grease filters** 

Charcoal filters included Yes **Light Power** 4 W 150 mm Light color temperature 4000 °K Vent outlet scale (°K) Minimum distance from 650 mm

GAS hob 620 m<sup>3</sup>/h

Free outlet maximum capacity Minimum distance from

160 W Motor power **ELECTRIC hob** 

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	260	45
Speed 2	390	54



Speed 3	600	63
------------	-----	----

#### Accessories included

Tube reduction Yes

### Performance / Energy Label

1	A***
	4

**Annual Efficiency** 79 kWh/a Consumption (AEChood) Energy efficieency class C (EEC) Fluid Dynamic Efficiency 18.20 (FDE) Fluid Dynamic Efficiency C class (FDEC) Lighting Efficiency (LE) 17 lux/W Lighting Efficiency Class C (LEC) **Grease Filtering** 75.1 % Efficiency (GFE) **Grease Filtering** С Efficiency Class (GFEC) Air flow at minumum 260 m<sup>3</sup>/h speed (Qmin) Air flow at maximum 600 m<sup>3</sup>/h speed (Qmax)

Airbourne acouistical A- 45 dBA weighted sound Power **Emission at minimum** speed (SPEmin) Airborne acoustical A-63 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Time increase factor (F) 1.3 **Energy Efficiency Index** Measured air flow rate 338 m<sup>3</sup>/h at best efficiency point (Qbep) Measured air pressure 300 Pa at best efficiency point (Pbep) Measured electric 155 W power input at best efficiency point (Wbep) Nominal Power 8 W consumption of the light system (WL) Average illumination of 133 lux the light on the cooking surface (Emiddle)

Sound power level at 63 dBA highest setting (Lwa)

#### **Electrical Connection**

Electrical connection 168 W

rating


Voltage 220-240 V Frequency (Hz) 50-60 Hz Power supply cable

length

Plug Not present

1500 mm



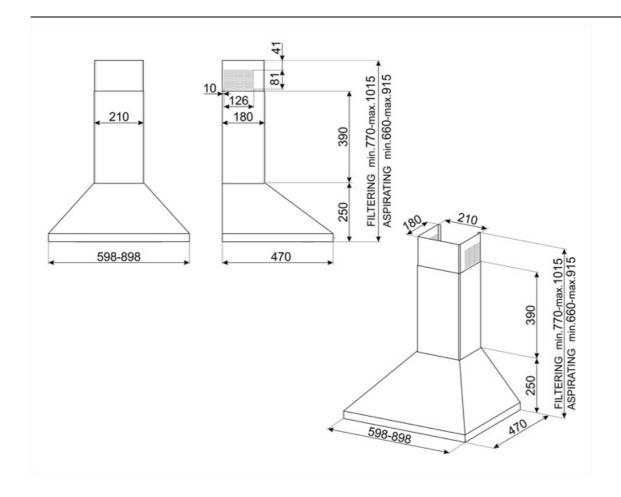



# **Compatible Accessories**

KITFC152

Charcoal filters Round Kit 2 pieces





## Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

C (T)