

# KDD60VXE-2



Product family	Hood
Hood Type	Downdraft Cooker Hoods
Design	Fully integrated
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709223182
Hood width	60 cm
Aesthetics	Universal
Colour	Black
Finishing	Brushed
Glass Type	Black
Serigraphy colour	White
Logo	Silk screen



## Controls



Control setting	Touch control	Display	Digital
Led colour	Red		

## Program / Functions

No. of speeds	4
Intensive speed	
24h air filter function	
Time-setting options	

## Technical Features



Remote motor	KITRBDD - Kit Optional	Free outlet maximum capacity	590 m <sup>3</sup> /h
No. of lights	1	Motor power	270 W
Light type	LED	No. of filters	2
Light power	7 W	Anti-grease filters	Aluminium
Dimmer mode	Yes	Filter replacement indicator	Yes
Light colour temperature scale (K)	4000 K		

Vent outlet

150 mm

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	135	44
Speed 2	230	52
Speed 3	295	57
Speed 4	375	62
Intensive speed	570	71

## Accessories Included

Sliding door	Yes	Tube reduction	Yes
--------------	-----	----------------	-----

## Performance / Energy Label




Annual Efficiency Consumption (AEC <sub>hood</sub> )	73 kWh/year	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPE <sub>min</sub> )	44 dBA
Energy efficiency class (EEC)	B	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE <sub>max</sub> )	57 dBA
Fluid Dynamic Efficiency (FDE)	22,4	Airbourne acoustical A-weighted sound power emission at boost speed (SPE <sub>boost</sub> )	71 dBA
Fluid Dynamic Efficiency class (FDEC)	C	Time increase factor (F)	1,2
Lighting Efficiency (LE)	29 lux/W	Energy Efficiency Index per first cavity	69,9
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Q <sub>bep</sub> )	293 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	55,1 %	Measured air pressure at best efficiency point (Q <sub>bep</sub> )	429 Pa
Grease Filtering Efficiency Class (GFEC)	E	Measured electric power input at best efficiency point (W <sub>bep</sub> )	156 W
Air flow at minumum speed (Q <sub>min</sub> )	135 m <sup>3</sup> /h	Normal Power of the light system (W <sub>I</sub> )	7 W
Maximum extraction rate	295 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (E <sub>middle</sub> )	200 lux
Intensive extraction rate	570 m <sup>3</sup> /h	Sound power level at highest setting (L <sub>wa</sub> )	57 dBA

## Electrical Connection

---

Nominal power	277 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	(F;E) Schuko
Frequency (Hz)	50-60 Hz		

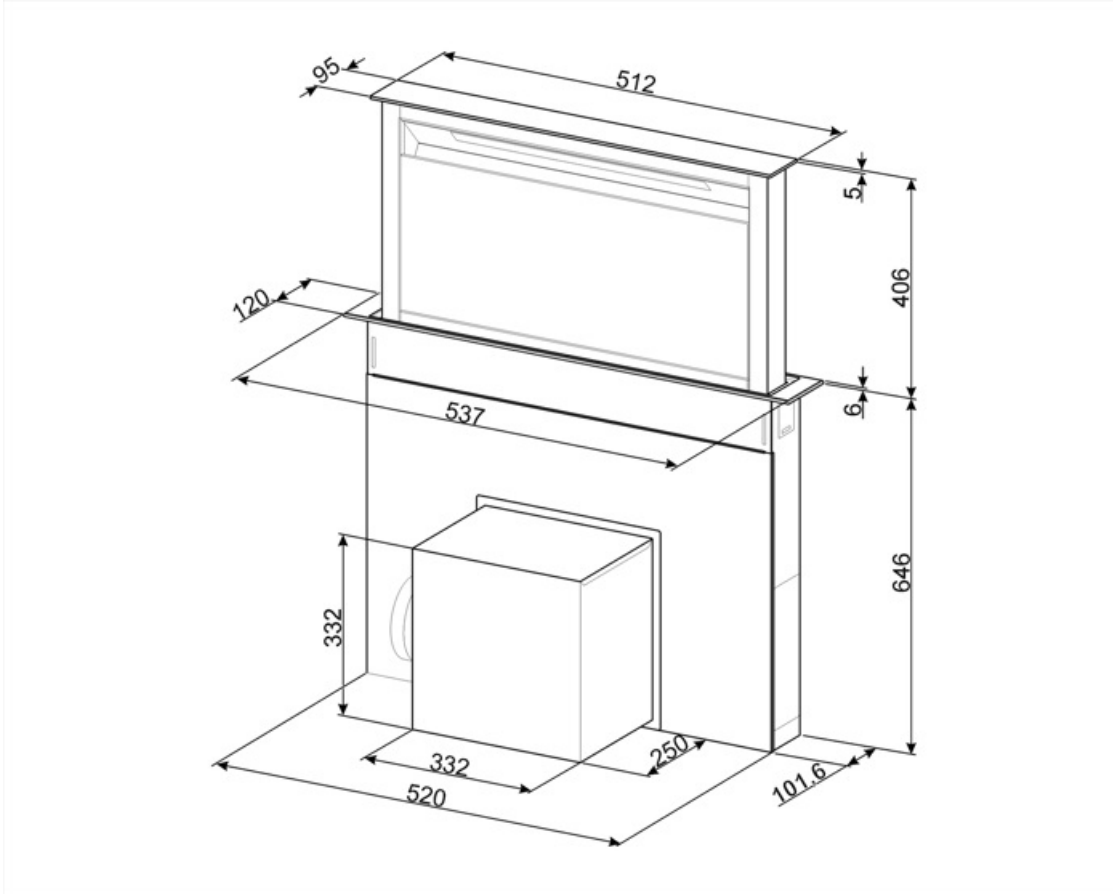

---

## Compatible Accessories

---



### KITFCDD60

Charcoal filter for hood Down Draft Kit 1 piece Dishwasher safe



### KITVENT150

Imbocco motore 150 mm con valvola di non ritorno













### KITRBDD

kit remote blower for DD hood

### RCKF2

Remote control

## Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.		Electronic display: to give a visual reminder of the options selected.
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Perimeter extraction panels: very efficient and aid noise reduction.		Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.
	Intensive/turbo setting: when extra fast extraction is required.		Dimmering Lights
