

KDD60VXE-2



Product family	Hood
Tipo de Exaustor	Fully Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709223182
Aesthetic	Universal
Colour	Black
Acabamento	Satin
Glass Type	Black
Cor da serigrafia	Serigrafia em branco
Logotipo	Logotipo serigrafado





Controls



Control setting	Touch control	Display	Digital
Led color	Red		

Program / Functions

No. of speeds	4
Intensive speed	
24h air filter function	
Other functions	No
Time-setting options	
Other options	No
Ventilação automática	No

Technical Features



Hood without motor	No	Motor power	270 W
Remote motor	KITRBDD - Kit Optional	No. of filters	2
No. of lights	1	Anti-grease filters	Aluminium
Light type	LED	Charcoal filters included	No
Light Power	7 W	Filter replacement indicator	Yes

Dimmer mode	Yes	Vent outlet	150 mm
Escala de temperatura de cor clara (°K)	4000 °K	Non return valve	No
Free outlet maximum capacity	590 m³/h		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	135	44
Speed 2	230	52
Speed 3	295	57
Speed 4	375	62
Intensive speed	570	71

Accessories Included

Remote control	No	Tube reduction	Yes
Sliding door	Yes		

Performance / Energy Label




Consumo anual de energia (CAE exaustor)	73 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	57 dBA
Energy efficiency class (EEC)	B	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	71 dBA
Fluid Dynamic Efficiency (FDE)	22.4	Power Consumption in Off mode (Po)	0.49 W
Fluid Dynamic Efficiency class (FDEC)	C	Time increase factor (F)	1.2
Lighting Efficiency (LE)	29 lux/W	Energy Efficiency Index	69.9
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	293 m³/h
Grease Filtering Efficiency (GFE)	55.1 %	Measured air pressure at best efficiency point (Pbep)	429 Pa
Grease Filtering Efficiency Class (GFEC)	E	Measured electric power input at best efficiency point (Wbep)	156 W
Air flow at minumum speed (Qmin)	135 m³/h	Nominal Power consumption of the light system (WL)	7 W
Air flow at maximum speed (Qmax)	295 m³/h	Average illumination of the light on the cooking surface (Emiddle)	200 lux
Air flow at boost speed (Qboost)	570 m³/h		
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	44 dBA		

Sound power level at highest setting (Lwa) 57 dBA

Electrical Connection

Plug	(F;E) Schuko	Frequency (Hz)	50-60 Hz
Electrical connection rating	277 W	Comprimento do cabo de alimentação	1500 mm
Voltage	220-240 V		

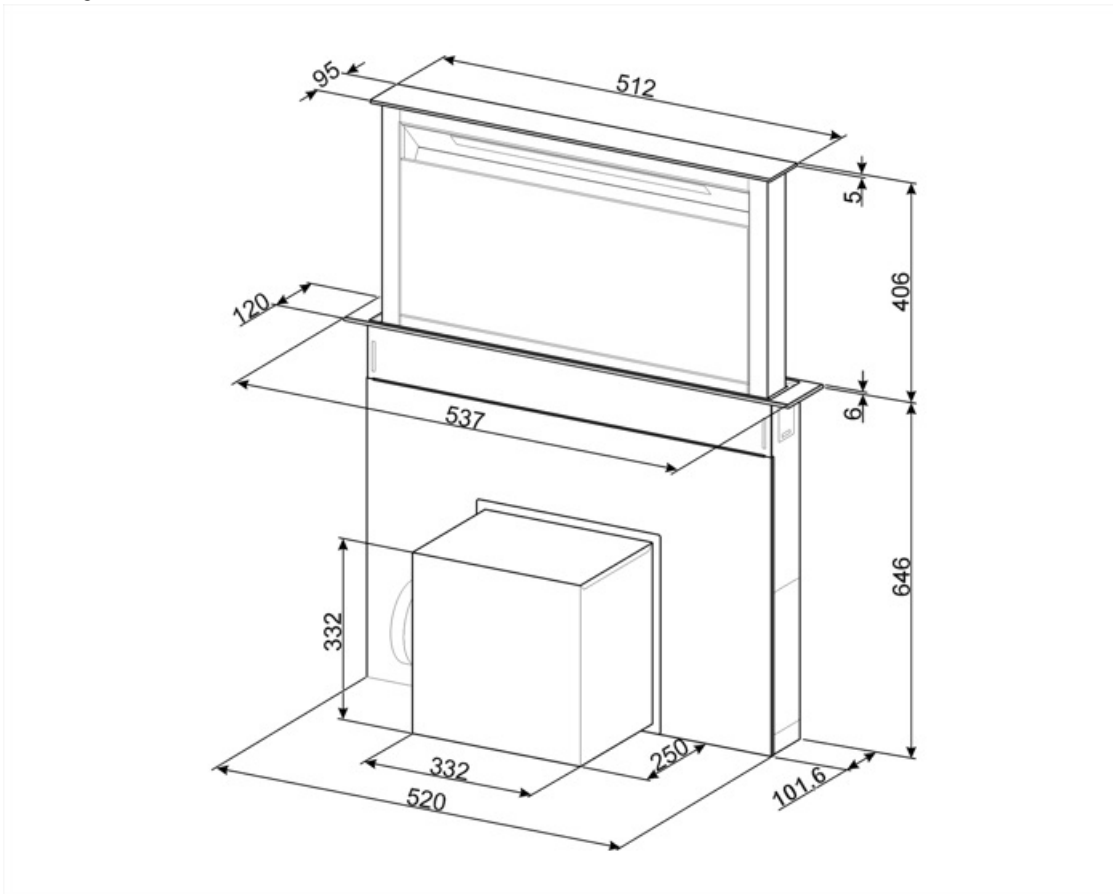

Compatible Accessories



KITFCDD60

Filtro de carvão para exaustor de bancada Kit 1 peça Pode ser lavado na máquina lava-louça



KITVENT150

Motor entrada 150 mm com válvula de não retorno














KITRBDD

kit ventilador remoto para exaustor DD

RCKF2

Comando à distância

Symbols glossary

- | | | | |
|--|---|---|--|
|  | 24h: Quando selecionada, esta função refresca o ar durante cerca de 10 minutos a cada hora durante um período de 24 horas, a uma velocidade mínima e a um nível de ruído imperceptível. |  | Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento. |
|  | Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente. |  | |
|  | Luzes de escurecimento |  | Visor eletrônico: para exibir um lembrete visual das opções selecionadas. |
|  | Luz(s) de aviso: para avisar quando os filtros precisam ser trocados. |  | Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha. |
|  | Painéis de extração de perímetro: muito eficiente e ajuda na redução de ruído. |  | Controles táteis: O controles táteis, fáceis de usar, permitem que o aparelho seja programado com o toque de um botão. |
|  | Configuração intensiva/turbo: quando a extração extra rápida é necessária. | | |

Benefit (TT)

Perimetral aspiration

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

Dimmering & Tunable lights

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones