KDD60VXE-3



Product family	Hood
Hood Type	DownDraft
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709346133
Hood width	60 cm
Aesthetic	Universale
Colour	Black
Finishing	Satin
Glass Type	Black
Serigraphy colour	White
Logo	Silk screen

Controls

Control setting	Touch control	**Display**	Digital
Led color	Red		

Program / Functions

No. of speeds	4
Intensive speed	BOOST
24h air filter function	24
Delay function	
Time-setting options	

Technical Features

Remote motor	KITRBDD - Kit Optional	**Free outlet maximum capacity**	680 m³/h
No. of lights	1	**Motor power**	250 W
Light type	LED	**No. of filters**	2
Light Power	6 W	**Anti-grease filters**	Aluminium
Dimmer mode	Yes		

Light color temperature (K)	2700 K

Filter replacement indicator	Yes
Vent outlet	150 mm

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	200	46
Speed 2	280	52
Speed 3	350	59
Speed 4	430	62
Intensive speed	650	70

Accessories included

Remote control	Optional
Motorised opening	Yes

Tube reduction	Yes

Performance / Energy Label




Annual Efficiency Consumption (AEChood)	64 kWh/a
Energy efficicency class (EEC)	B
Fluid Dynamic Efficiency (FDE)	28.50
Fluid Dynamic Efficiency class (FDEC)	A
Lighting Efficiency (LE)	33 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	55.1 %
Grease Filtering Efficiency Class (GFEC)	E
Air flow at minumum speed (Qmin)	200 m³/h
Air flow at maximum speed (Qmax)	350 m³/h
Air flow at boost speed (Qboost)	650 m³/h

Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	46 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	59 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dBA
Time increase factor (F)	1.0
Energy Efficiency Index	59
Measured air flow rate at best efficiency point (Qbep)	377 m³/h
Measured air pressure at best efficiency point (Pbep)	446 Pa
Measured electric power input at best efficiency point (Wbep)	164 W
Nominal Power consumption of the light system (WL)	6 W
Average illumination of the light on the cooking surface (Emiddle)	200 lux

Sound power level at highest setting (Lwa)	52 dBA

Electrical Connection

Electrical connection rating	256 W	**Power supply cable length**	1500 mm
Voltage	220-240 V	**Plug**	(F;E) Schuko
Frequency (Hz)	50-60 Hz		

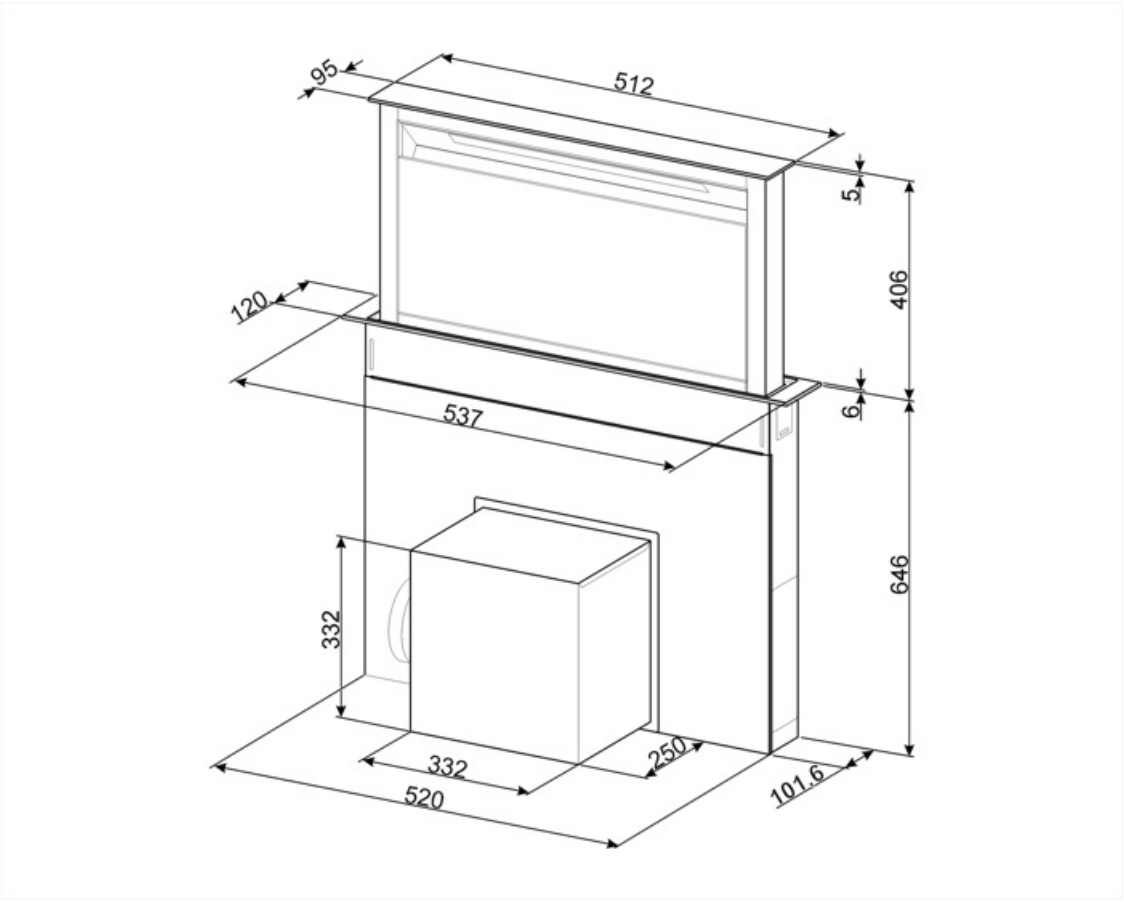

Compatible Accessories



KITFCDD60

Charcoal filter for hood Down Draft Kit 2 pieces Dishwasher safe

KITRBDD

kit remote blower for DD hood. Cable lenght: 7 meters.



KITVENT150

Motor inlet 150 mm with check valve



RCKF2

Remote control

Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Delay timer: can be set to run the programme at a convenient time or to take advantage of off-peak energy periods.



Electronic display: to give a visual reminder of the options selected.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Dimmering Lights



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.