

# KDD60VXE-3



|                             |                       |
|-----------------------------|-----------------------|
| <b>Product family</b>       | Hood                  |
| <b>Tipo de Exaustor</b>     | Fully Integrated hood |
| <b>Design</b>               | Fully integrated      |
| <b>Extraction</b>           | Extraction            |
| <b>Electronic control</b>   | Yes                   |
| <b>Perimeter extraction</b> | Yes                   |
| <b>Material</b>             | Stainless steel       |
| <b>Type of steel</b>        | Brushed               |
| <b>EAN code</b>             | 8017709346133         |
| <b>Aesthetic</b>            | Universal             |
| <b>Colour</b>               | Black                 |
| <b>Acabamento</b>           | Satin                 |
| <b>Glass Type</b>           | Black                 |
| <b>Cor da serigrafia</b>    | Serigrafia em branco  |
| <b>Logotipo</b>             | Logotipo serigrafado  |



## Controls



|                        |               |                |         |
|------------------------|---------------|----------------|---------|
| <b>Control setting</b> | Touch control | <b>Display</b> | Digital |
| <b>Led color</b>       | Red           |                |         |

## Program / Functions

|                                |   |
|--------------------------------|---|
| <b>No. of speeds</b>           | 4   |
| <b>Intensive speed</b>         |  |
| <b>24h air filter function</b> |  |
| <b>Other functions</b>         | Delay_function  |
| <b>Time-setting options</b>    |  |
| <b>Other options</b>           | No  |
| <b>Ventilação automática</b>   | No  |

## Technical Features



|                           |                        |                                     |           |
|---------------------------|------------------------|-------------------------------------|-----------|
| <b>Hood without motor</b> | No                     | <b>Motor power</b>                  | 250 W     |
| <b>Remote motor</b>       | KITRBDD - Kit Optional | <b>No. of filters</b>               | 2         |
| <b>No. of lights</b>      | 1                      | <b>Anti-grease filters</b>          | Aluminium |
| <b>Light type</b>         | LED                    | <b>Charcoal filters included</b>    | No        |
| <b>Light Power</b>        | 6 W                    | <b>Filter replacement indicator</b> | Yes       |

|   |          |                  |        |
|---|----------|------------------|--------|
| Dimmer mode                             | Yes      | Vent outlet      | 150 mm |
| Escala de temperatura de cor clara (°K) | 2700 °K  | Non return valve | No     |
| Free outlet maximum capacity            | 680 m³/h |                  |        |

|                 | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dBA] |
|-----------------|----------------------------------|----------------------------------|
| Speed 1         | 200                              | 46                               |
| Speed 2         | 280                              | 52                               |
| Speed 3         | 350                              | 59                               |
| Speed 4         | 430                              | 62                               |
| Intensive speed | 650                              | 70                               |

## Accessories Included

|                |          |                |     |
|----------------|----------|----------------|-----|
| Remote control | Optional | Tube reduction | Yes |
| Sliding door   | Yes      |                |     |

## Performance / Energy Label




|  |          |  |          |
|--|----------|--|----------|
| Consumo anual de energia (CAE exaustor)  | 64 kWh/a | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 46 dBA   |
| Energy efficiency class (EEC)            | B        | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)  | 59 dBA   |
| Fluid Dynamic Efficiency (FDE)           | 28,50    | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 70 dBA   |
| Fluid Dynamic Efficiency class (FDEC)    | A        | Time increase factor (F)   | 1,0      |
| Lighting Efficiency (LE)                 | 33 lux/W | Energy Efficiency Index  | 59       |
| Lighting Efficiency Class (LEC)          | A        | Measured air flow rate at best efficiency point (Qbep)                         | 377 m³/h |
| Grease Filtering Efficiency (GFE)        | 55,1 %   | Measured air pressure at best efficiency point (Pbep)                          | 446 Pa   |
| Grease Filtering Efficiency Class (GFEC) | E        | Measured electric power input at best efficiency point (Wbep)                  | 164 W    |
| Air flow at minumum speed (Qmin)         | 200 m³/h | Nominal Power consumption of the light system (WL)                             | 6 W      |
| Air flow at maximum speed (Qmax)         | 350 m³/h | Average illumination of the light on the cooking surface (Emiddle)             | 200 lux  |
| Air flow at boost speed (Qboost)         | 650 m³/h |  |          |

Sound power level at highest setting (Lwa) 52 dBA

## Electrical Connection

|                              |              |                                    |          |
|------------------------------|--------------|------------------------------------|----------|
| Plug                         | (F;E) Schuko | Frequency (Hz)                     | 50-60 Hz |
| Electrical connection rating | 256 W        | Comprimento do cabo de alimentação | 1500 mm  |
| Voltage                      | 220-240 V    |                                    |          |

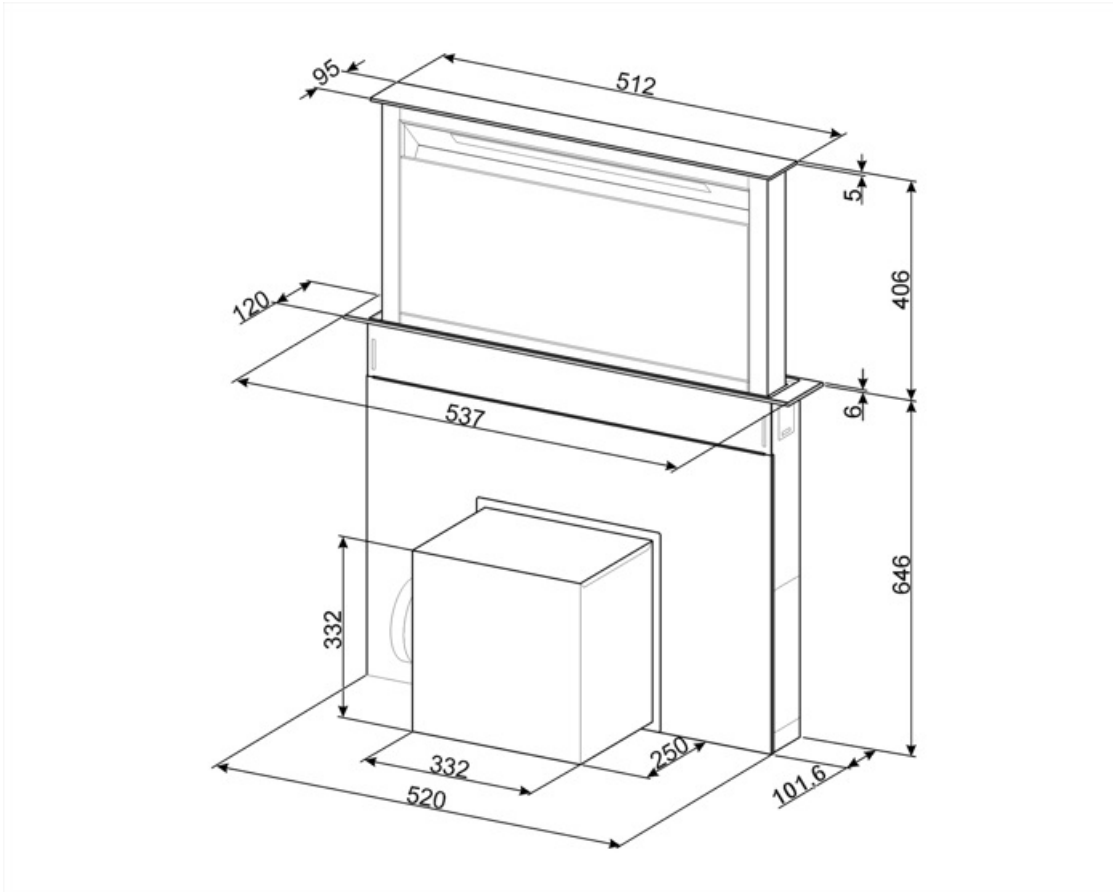

---

## Compatible Accessories

---



### KITFCDD60

Filtro de carvão para exaustor de bancada Kit 1 peça Pode ser lavado na máquina lava-louça



### KITVENT150

Motor entrada 150 mm com válvula de não retorno














### KITRBDD

kit ventilador remoto para exaustor DD

### RCKF2

Comando à distância

## Symbols glossary

- |  |   |   |  |
|--|---|---|--|
|  | 24h: Quando selecionada, esta função refresca o ar durante cerca de 10 minutos a cada hora durante um período de 24 horas, a uma velocidade mínima e a um nível de ruído imperceptível. |  | Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.        |
|  | Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.                    |  | Visor eletrônico: para exibir um lembrete visual das opções selecionadas.  |
|  | Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.   |  | Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.         |
|  | Painéis de extração de perímetro: muito eficiente e ajuda na redução de ruído.  |  | Controles táteis: O controles táteis, fáceis de usar, permitem que o aparelho seja programado com o toque de um botão. |
|  | Configuração intensiva/turbo: quando a extração extra rápida é necessária.  |  | Luzes de escurecimento   |
- 

## Benefit (TT)

---

### **Perimetral aspiration**

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

### **Dimmering & Tunable lights**

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones