

# KDD60VXE-2



Product family	Hood
Hood Type	Downdraft Cooker Hoods
Design	Fully integrated
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709223182
Hood width	60 cm



## Aesthetics

Aesthetics	Universal	Glass Type	Black
Colour	Black	Serigraphy colour	White
Finishing	Brushed	Logo	Silk screen

## Controls



Control setting	Touch control	Display	Digital
Led colour	Red		

## Programs / Functions

No. of speeds	4
Intensive speed	
24h air filter function	
Time-setting options	

## Technical Features



Remote motor	KITRBDD - Kit Optional	Free outlet maximum capacity	590 m <sup>3</sup> /h
No. of lights	1		

Light type	LED	Motor power	270 W
Light power	7 W	No. of filters	2
Dimmer mode	Yes	Anti-grease filters	Aluminium
Light colour	4000 °K	Filter replacement indicator	Yes
temperature scale (°K)		Vent outlet	150 mm

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	135	44
Speed 2	230	52
Speed 3	295	57
Speed 4	375	62
Intensive speed	570	71

## Accessories Included

Sliding door	Yes	Tube reduction	Yes
--------------	-----	----------------	-----

## Performance / Energy Label




Annual Efficiency Consumption (AEChood)	73 kWh/year	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	57 dBA
Energy efficiency class (EEC)	B	Airborne acoustical A-weighted sound power emission at boost speed (SPEboost)	71 dBA
Fluid Dynamic Efficiency (FDE)	22.4	Power Consumption in Off mode (Po)	0.49 W
Fluid Dynamic Efficiency class (FDEC)	C	Time increase factor (F)	1.2
Lighting Efficiency (LE)	29 lux/W	Energy Efficiency Index per first cavity	69.9
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	293 m³/h
Grease Filtering Efficiency (GFE)	55.1 %	Measured air pressure at best efficiency point (Qbep)	429 Pa
Grease Filtering Efficiency Class (GFEC)	E	Measured electric power input at best efficiency point (Wbep)	156 W
Air flow at minimum speed (Qmin)	135 m³/h	Normal Power of the light system (WI)	7 W
Maximum extraction rate	295 m³/h	Average illumination of the light on the cooking surface (Emiddle)	200 lux
Intensive extraction rate	570 m³/h		
Airborne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	44 dBA		

Sound power level at  
highest setting (Lwa)

57 dBA

## Electrical Connection

Plug	(F;E) Schuko	Frequency (Hz)	50-60 Hz
Nominal power	277 W	Power supply cable length	1500 mm
Voltage	220-240 V		

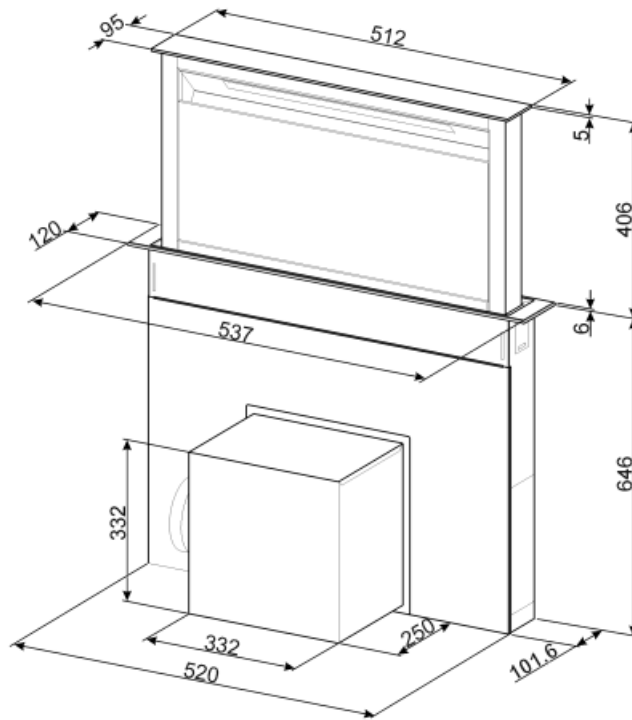

---

## Not included accessories

---



**RCKF2**

Remote control

**KITRBDD**

kit remote blower for DD hood



**KITFCDD60**











Charcoal filter for hood Down Draft Kit 1  
piece Dishwasher safe



**KITVENT150**

Imbocco motore 150 mm con valvola  
di non ritorno

## Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.		Electronic display: to give a visual reminder of the options selected.
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Perimeter extraction panels: very efficient and aid noise reduction.		Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.
	Intensive/turbo setting: when extra fast extraction is required.		...
