

KDD60VXE-3



Product family Hood **Hood Type** DownDraft Fully integrated Design Extraction Extraction **Electronic control** Yes Perimeter extraction Yes

Material Stainless steel Type of steel Brushed

EAN code 8017709346133

Hood width 60 cm Aesthetic Universale Colour Black **Finishing** Satin Glass Type Black White Serigraphy colour Silk screen Logo



Controls





Control setting Touch control

Led color Red Display

Digital

Program / Functions

No. of speeds Intensive speed

24h air filter function

Other functions Time-setting options





Delay_function



Technical Features









Remote motor KITRBDD - Kit Optional

No. of lights Light type **LED Light Power** 6 W Dimmer mode Yes

Light color temperature scale (K)

2700 K

Free outlet maximum

capacity

Motor power No. of filters

Anti-grease filters Filter replacement

indicator

680 m³/h

250 W

Aluminium

Yes

2

SMEG SPA 11/15/2025



Vent outlet

150 mm

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	200	46
Speed 2	280	52
Speed 3	350	59
Speed 4	430	62
Intensive speed	650	70

Accessories included

Remote control Optional Motorised opening Yes

Tube reduction

Yes

Performance / Energy Label

Ar
77
Ď

Annual Efficiency 64 kWh/a Consumption (AEChood) Energy efficieency class B (EEC) Fluid Dynamic Efficiency 28.50 (FDE) Fluid Dynamic Efficiency A class (FDEC) Lighting Efficiency (LE) 33 lux/W Lighting Efficiency Class A (LEC) **Grease Filtering** 55.1 % Efficiency (GFE) **Grease Filtering** Ε Efficiency Class (GFEC) Air flow at minumum 200 m³/h speed (Qmin) Air flow at maximum 350 m³/h speed (Qmax) Air flow at boost speed 650 m³/h (Qboost)

Airbourne acouistical A- 46 dBA weighted sound Power **Emission at minimum** speed (SPEmin) Airborne acoustical A-59 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Airbourne acoustical A- 70 dBA weighted sound power emission at boost speed (SPEboost) Time increase factor (F) **Energy Efficiency Index** 59 Measured air flow rate 377 m³/h at best efficiency point (Qbep) Measured air pressure 446 Pa at best efficiency point (Pbep) Measured electric 164 W power input at best efficiency point (Wbep) **Nominal Power** 6 W consumption of the light system (WL) Average illumination of 200 lux the light on the cooking surface (Emiddle)

SMEG SPA 11/15/2025

Sound power level at

highest setting (Lwa)

52 dBA



Electrical Connection

Electrical connection 256 W


rating

Voltage 220-240 V Frequency (Hz) 50-60 Hz Power supply cable

1500 mm

length

Plug (F;E) Schuko

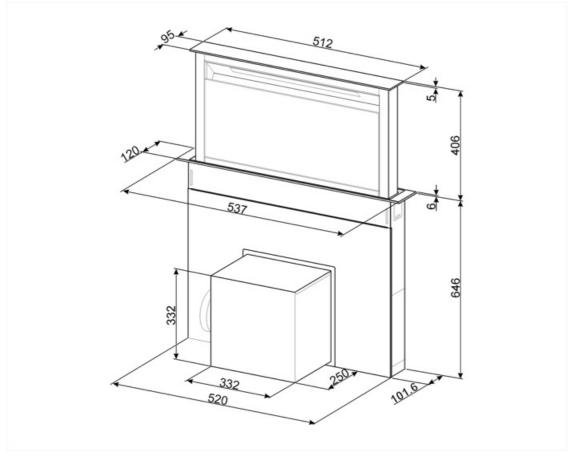

SMEG SPA 11/15/2025



Compatible Accessories



KITFCDD60

Charcoal filter for hood Down Draft Kit 2 pieces Dishwasher safe



KITVENT150

Motor inlet 150 mm with check valve



KITRBDD

kit remote blower for DD hood. Cable lenght: 7 meters.

RCKF2

Remote control

SMEG SPA 11/15/2025



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



0

Dimmering Lights



Electronic display: to give a visual reminder of the options selected.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Intensive/turbo setting: when extra fast extraction is required.

SMEG SPA 11/15/2025