

KDD90CNE



Product family Hood

Fully Integrated hood **Hood Type** Fully integrated Design Extraction Extraction **Electronic control** Yes Yes

Perimeter extraction Material Glass Type of steel **Brushed**

EAN code 8017709305796

Hood width 90 cm **Aesthetic** Universale Colour Black **Finishing** Glass Glass Type Black Serigraphy colour Silver Logo Silk screen



Controls





Control setting Touch control Display Digital

Led color White

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options







Technical Features









Remote motor KITRBDD - Kit Optional

No. of lights Light type **LED Light Power** 7 W Dimmer mode Yes

Light color temperature 4000 K

scale (K)

Free outlet maximum

capacity

Motor power 270 W No. of filters

Anti-grease filters Filter replacement

indicator

725 m³/h

Aluminium

Yes



Vent outlet

150 mm

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	160	40
Speed 2	290	53
Speed 3	350	54
Speed 4	430	60
Intensive speed	700	70

Accessories Included

Sliding door Yes Tube reduction Yes

Performance / Energy Label

(A E			
Annual Efficiency	58 kWh/a		
Consumption (AEChood)			
Energy efficieency class (EEC)	Α		
Fluid Dynamic Efficiency (FDE)	30		
Fluid Dynamic Efficiency class (FDEC)	Α		
Lighting Efficiency (LE)	29 lux/W		
Lighting Efficiency Class (LEC)	Α		
Grease Filtering Efficiency (GFE)	65,1 %		
Grease Filtering Efficiency Class (GFEC)	D		
Air flow at minumum speed (Qmin)	160 m³/h		
Air flow at maximum speed (Qmax)	350 m³/h		
Air flow at boost speed	700 m³/h		

weighted sound Power Emission at minimum speed (SPEmin) Airborne acoustical A-54 dBA weighted sound Power Emission at maximum speed (SPEmax) Airbourne acoustical A- 70 dBA weighted sound power emission at boost speed (SPEboost) Time increase factor (F) 0,9 **Energy Efficiency Index** 53,8 Measured air flow rate 397 m³/h at best efficiency point (Qbep) Measured air pressure 441 Pa at best efficiency point (Pbep) Measured electric 162 W power input at best efficiency point (Wbep) 7 W **Nominal Power** consumption of the light system (WL) Average illumination of 200 lux the light on the cooking surface (Emiddle) Sound power level at 54 dBA highest setting (Lwa)

Airbourne acouistical A- 40 dBA

Electrical Connection

(Qboost)



Electrical connection

277 W

Power supply cable length

1500 mm

rating


Voltage

Frequency (Hz)

220-240 V 50-60 Hz Plug

(F;E) Schuko

Also available

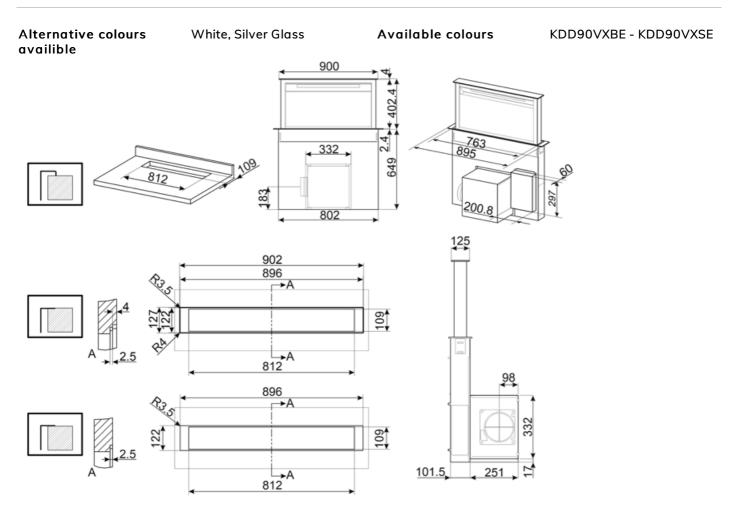



Compatible Accessories

KITFCDD



Charcoal filter for hood Down Draft Kit 1 piece Dishwasher safe

RCKF2



Remote control

KITRBDD

kit remote blower for DD hood



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



A: Product drying performance, measured from A+++ to D / G depending on the product family



...



Electronic display: to give a visual reminder of the options selected.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Intensive/turbo setting: when extra fast extraction is required.